

INTERNATIONAL
STANDARD

ISO/IEC
8211

Second edition
1994-10-01

**Information technology — Specification
for a data descriptive file for information
interchange**

*Technologies de l'information — Spécifications pour fichier de données
descriptif pour l'échange d'information*

IECNORM.COM: Click to view the full PDF of ISO/IEC 8211:1994



Reference number
ISO/IEC 8211:1994(E)

Contents

Foreword	vii
Introduction	viii
1 Scope	1
2 Normative references	1
3 Conformance	2
4 Definitions and abbreviations	2
4.1 Definitions	2
4.2 Abbreviations	5
5 Interchange file and logical record structure	6
5.1 File and logical record structure	7
5.1.1 Interchange logical records	7
5.1.2 Padding of records and media blocks	7
5.2 Logical records - leaders and directories	7
5.2.1 Logical record leader	8
5.2.1.1 record length field (LR RP 0-4)	8
5.2.1.2 leader identifier field (LR RP 6)	8
5.2.1.3 ISO/IEC 8211 version number (LR RP 8)	8
5.2.1.4 Base address of field area (LR RP 12-16)	8
5.2.1.5 Entry map field (LR RP 20-23)	9
5.2.1.5.1 Size of field length field (LR RP 20)	9
5.2.1.5.2 Size of field position field (LR RP 21)	9
5.2.1.5.3 Reserved for future standardization (LR RP 22)	9
5.2.1.5.4 Size of field tag field (LR RP 23)	9
5.2.1.6 Alternate forms of counts and field positions	9
5.2.2 Logical record directory	10
5.2.2.1 Field tag field	10
5.2.2.2 Field length field	10
5.2.2.3 Field position field	10
5.3 Logical record field areas	10
5.3.1 Field area of the DDR	10
5.3.2 The field areas of the DRs	11
5.3.2.1 User data fields	11
5.3.2.1.1 Elementary data fields	11
5.3.2.1.2 Compound data fields	11
6 Description of user data types and structures	11
6.1 DDR leader fields related to data description	11
6.1.1 Interchange level field (DDR RP 5)	11
6.1.2 Inline code extension indicator (DDR RP 7)	12
6.1.3 Application indicator field (DDR RP 9)	12
6.1.3.1 Reference to other standards	12
6.1.4 Field control length field (DDR RP 10-11)	12
6.1.5 Extended character set indicator field (DDR RP 17-19)	12
6.2 Special field tags (tags = 0...0 to 0...9)	12
6.2.1 File control field (tag = 0...0)	12
6.2.1.1 Field control field	13
6.2.1.2 External file title field	13
6.2.1.3 List of Field tag pairs	13
6.2.2 Record identifier field (tag = 0...1)	13
6.2.3 User application field (tag 0...2)	13
6.2.4 Announcer sequence or feature identifier field (tag 0...3)	13
6.2.5 Fields reserved for future standardization	13
6.2.6 Recursive tree LINKS field (tag = 0...9)	14
6.2.7 Order of special field tags in the DDR	14
6.3 Data descriptive fields in level 1 files	14

6.4 Data descriptive fields in level 2 and 3 files.....	14
6.4.1 Tabular summary of data descriptive fields of level 2 and 3 files.....	14
6.4.2 Field controls.....	15
6.4.2.1 Data structure code (RP 0).....	16
6.4.2.2 Data type code (RP 1).....	16
6.4.2.3 Auxiliary controls (RP 2-3).....	16
6.4.2.4 Printable graphics (RP 4-5).....	16
6.4.2.5 Truncated escape sequence (RP 6-8).....	16
6.4.3 Data field names, array descriptors and format controls.....	16
6.4.3.1 Data field name.....	16
6.4.3.2 Array descriptors.....	16
6.4.3.2.1 Numeric array descriptor.....	17
6.4.3.2.2 Subfield labels.....	17
6.4.3.2.3 Vector labels.....	17
6.4.3.2.4 Cartesian label.....	17
6.4.3.2.5 Description of concatenated structures.....	17
6.4.3.3 Format controls.....	19
6.4.4 Order of array descriptors, labels and arrays.....	21
6.4.4.1 Order of numeric array descriptors.....	21
6.4.4.2 Order of cartesian labels.....	21
6.4.4.3 Storage order of array elements.....	21
7 Use of coded character sets	22
7.1 Announcement of coded character set extension	22
7.1.1 Scope of active character sets	22
7.1.2 Length of fields and subfields.....	22
7.1.3 Use of multiple octet character sets	23
7.2 ISO 2022 coded character set extension.....	23
7.2.1 Designation of ISO 2022 coded character sets	23
7.2.1.1 Use in the 7-bit environment.....	23
7.2.2 Designation of default code set for file.....	23
7.2.3 Designation of default code sets for fields	23
7.2.4 ISO 2022 announcer sequence field (tag 0...3).....	24
7.3 ISO/IEC 10646 coded character sets.....	24
7.3.1 Announcement of filewise default character set	24
7.3.2 Announcement of fieldwise default character set	24
7.3.3 ISO/IEC 10646 feature identifier field (tag 0...3)	24
Annex A ASN.1 and FTAM Registrations	26
A.1 Abstract syntax identifier	26
A.2 Transfer syntax identifier	26
A.3 FTAM document type definitions	26
A.3.1 ISO DDF unstructured document type	26
A.3.1.1 Entry number: DDF-1	26
A.3.1.2 Information objects	26
A.3.1.3 Scope and field of application	26
A.3.1.4 References	26
A.3.1.5 Definitions	26
A.3.1.6 Abbreviations	27
A.3.1.7 Document semantics	27
A.3.1.8 Abstract syntactic structure	27
A.3.1.9 Definition of transfer	27
A.3.1.9.1 Datatype definition	27
A.3.1.9.2 Presentation data values	27
A.3.1.9.3 Sequence of presentation data values	27
A.3.1.10 Transfer syntax	27
A.3.1.11 ASE specific specifications	27
A.3.1.11.1 ISO 8571 - FTAM	27
A.3.1.11.2 ISO/IEC 8211 implementation support	27
A.3.1.11.2.1 The EXTEND operation	27
A.3.1.11.2.2 The REPLACE operation	28
A.3.1.11.2.3 Relaxations	28
A.3.2 ISO DDF Structured document type	28
A.3.2.1 Entry number: DDF-2	28
A.3.2.2 Information objects	28
A.3.2.3 Scope and field of application	28
A.3.2.4 References	28

A.3.2.5 Definitions.....	28
A.3.2.6 Abbreviations.....	28
A.3.2.7 Document semantics.....	29
A.3.2.8 Abstract syntactic structure.....	29
A.3.2.9 Definition of transfer.....	29
A.3.2.9.1 Datatype definition.....	29
A.3.2.9.2 Presentation data values.....	29
A.3.2.9.3 Sequence of presentation data values.....	29
A.3.2.10 Transfer syntax.....	29
A.3.2.11 ASE specific specifications.....	30
A.3.2.11.1 ISO 8571 - FTAM.....	30
A.3.2.11.2 ISO/IEC 8211 implementation support.....	30
A.3.2.11.2.1 The EXTEND operation.....	30
A.3.2.11.2.2 The REPLACE operation.....	30
A.3.2.11.2.3 Relaxations.....	30
Annex B ISO/IEC 8211 Application Specifications.....	31
B.1 Specification of ISO/IEC 8211 Exchange File Sets.....	31
B.2 ISO/IEC 8211 data field description.....	33
B.2.1 General specifications.....	33
B.2.1.1 End of line.....	33
B.2.1.2 White space.....	33
B.2.1.3 Comments.....	33
B.2.1.4 Quoted strings.....	33
B.2.1.5 Notation.....	34
B.2.1.6 The INCLUDE construct.....	34
B.2.1.7 Order of Constructs.....	34
B.2.2 File identification.....	34
B.2.3 DDR leader specifications.....	35
B.2.4 Global default specification.....	35
B.2.5 Data field specifications.....	35
B.2.6 Special forms of field constructs.....	37
B.2.6.1 Null first vector label.....	37
B.2.6.2 Correspondence of format and last vector label.....	37
B.2.6.3 Special DDR tagged fields.....	37
B.2.7 Special constructs.....	38
B.3 Examples of exchange set specification.....	38
Annex C Informal Introduction to ISO/IEC 8211.....	42
C.1 ISO/IEC 8211 File, logical record and field constructs.....	42
C.1.1 Media record constructs.....	42
C.1.2 Logical record constructs.....	42
C.1.3 Logical record structure.....	43
C.1.3.1 Leader (RP 0 - 23).....	43
C.1.3.2 Directory.....	43
C.1.3.3 Field area.....	44
C.1.4 File characteristics and processing.....	44
C.1.5 Variant logical records.....	45
C.1.5.1 Long ISO/IEC 8211 records.....	45
C.1.5.2 Fixed formats - repeating leaders and directories.....	45
C.1.6 ISO/IEC 8211 End-of-data conditions.....	45
C.1.7 Summary of the logical record and field constructs.....	46
C.2 Data description and identification.....	46
C.2.1 Components of data description.....	46
C.2.1.1 Data extent.....	46
C.2.1.2 Data position.....	46
C.2.1.3 Data structure.....	46
C.2.1.4 Data type and syntax.....	46
C.2.1.5 Intra-field tree structure.....	46
C.2.2 Data identification.....	47
C.2.2.1 Application semantics.....	47
C.3 File and record contents.....	47
C.4 Binary directories.....	47
Annex D Introduction to ISO/IEC 8211 Data Description.....	48
D.1 Data description - user data.....	48
D.2 Consistency of data description and data - validation.....	48
D.2.1 Complexity of data description.....	48

D.2.2 Level 1 data description.....	49
D.2.3 Level 2 and 3 data description.....	49
D.3 Data description constructs.....	50
D.3.1 Subfield extents.....	50
D.3.2 Data types.....	50
D.3.3 Field identification	50
D.3.4 Data structure without subfield identification	50
D.3.5 Data structure with subfield identification.....	51
D.4 Large application data structures	51
D.5 Intra-record tree structures	51
D.6 Coded character set extensions	51
Annex E Examples of Data Description.....	53
E.1 Leader and file title field	53
E.2 Examples of formats	54
E.2.1 Elementary data fields.....	54
E.2.2 Linear structures	54
E.2.3 Multi-dimensioned arrays	54
E.3 Examples of bit fields.....	55
E.4 Examples of binary forms	56
E.5 Examples of subfield labelling	56
E.5.1 Redundant elementary field label.....	56
E.5.2 Vector labels	56
E.5.3 Cartesian labels	57
E.5.4 Concatenated data structures	57
Annex F DDF Hierarchical and Network Data Structures	58
F.1 DDF hierarchical data structures	58
F.1.1 Forests	58
F.2 Conversion to corresponding binary tree	58
F.3 Network data structures	61
Annex G Database Data Transfer	62
G.1 Essential features of data base management systems.....	62
G.1.1 Relational data base management systems	62
G.1.2 Hierarchical data base management systems	63
G.1.3 Network data base management systems	63
G.2 Reduction to relational forms.....	63
Annex H Relationship to Other OSI Work	64
H.1 OSI basic reference model.....	64
H.1.1 Other presentation layer considerations	64
H.1.2 Remote versus local processing considerations	65
H.2 Relationship to FTAM virtual filestore model	65
H.2.1 Correspondence of ISO/IEC 8211 file constructs to FTAM	66
H.2.2 ISO/IEC 8211 access methodology	67
H.2.3 Relationship of documents to files	67
H.2.4 File naming	67
H.3 Relationship to other syntax notations	67
H.3.1 Abstract syntax notation one	67
H.3.2 Transfer Syntax Description Notation	68
H.4 Relationship to data base management models	68
H.5 Bibliography	68
H.6 Summary of data types in other projects	69

List of figures

Figure 1 - Schematic of ISO/IEC 8211 File and Logical Records	6
Figure 2 - File Schematic Representation	7
Figure 3 - Logical Record Schematic	7
Figure 4 - LR Leader Schematic	8
Figure 5 - LR Entry Map Schematic	9
Figure 6 - LR Directory Entry Schematic	10
Figure 7 - File Control Field Schematic	13
Figure 8 - Schematic of Level 2 and 3 Data Descriptive Fields	15
Figure F.1 - Examples of Ordered Rooted Trees	59
Figure F.2 - Generic Structure of a Logical Record	59
Figure F.3 - Instance of a User Data Tree based on F.2	60
Figure F.4 - Corresponding Binary Tree to the Tree of F.2.....	61

List of tables

Table 1 - Delimiters and Their Uses	15
Table 2 - Data Descriptive Field Components	15
Table 3 - Extensions of Bitfield Data Descriptions	20
Table A.1 Information Objects in the Unstructured Text Document Type	26
Table A.2 Information Objects in the Structured Text Document Type	28

IECNORM.COM: Click to view the full PDF of ISO/IEC 8211:1994

Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work.

In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1. Draft International Standards adopted by the joint technical committee are circulated to the national bodies for voting. Publication as an International Standard requires approval by at least 75 % of the national bodies casting a vote.

International Standard ISO/IEC 8211 was prepared by Joint Technical Committee ISO/IEC JTC 1, *Information technology, Subcommittee SC 21, Open systems interconnection, data management and open distributed processing*.

This second edition cancels and replaces the first edition (ISO 8211:1985), which has been technically revised.

The substantive changes made to produce this edition of ISO/IEC 8211 are the following additions:

1. Binary forms for numeric values.
2. Binary leaders and directories.
3. Support for ISO/IEC 10646.
4. Definition of FTAM unstructured and structured document types.
5. Concatenated regular structures.
6. Recursive tree description.
7. A human-readable, alternate form of data field description.

The second edition is backwards compatible with the first edition.

Annex A forms an integral part of this International Standard. Annexes B to H are for information only.

Introduction

This International Standard has been produced in response to an identified need for a mechanism to allow data structures to be easily moved from one computer system to another, independent of architecture. Data structures required to be interchanged can vary significantly in complexity and size, and a common method to accomplish these interchanges is desirable. It is also desirable that any medium such as a communication line, a magnetic tape, a disk pack, a flexible disk etc., should be able to be used for the physical interchange, and that all information necessary to successfully recreate the structure in the target system should be contained within the information transported on the medium.

To meet these needs this International Standard specifies medium-independent and system-independent file and data record formats for the interchange of information between computer systems. This International Standard is intended for use with physical recorded media as well as with communications media. The contents in the user data structure can be of any internationally recognized character set and coding and are interchanged in a transparent fashion. The intermediate structure through which the information passes is designed for interchange purposes. It can also be used for some forms of general processing and is amenable to direct access methods on high volume, direct access interchange media.

This International Standard is a concrete transfer syntax and encoding standard and provides a tool for the description of files containing user data but does not specify the content or order of user data fields or user data records. It does specify a comprehensive generic form for such records and fields which can accommodate a wide variety of user needs for both simple and complex user data. An application must design its own instance of a conforming interchange file and all conforming files, both data and data description, will be processable to the field or subfield level by the same software. A user must, of course, complete the interface to their own application system.

The approach used is to define an interchange format into which most information structures and their content can be transformed without loss of information, and from which the original structure and content can be retrieved. The interchange format is suitable both for recording on physical media and transport through a communication system.

The data structures supported by the interchange format are elementary data, vectors, arrays and hierarchies. The file structures that can be transformed into the interchange format include sequential, hierarchical and relational. Network structures are not directly supported and additional pre-processing and post-processing are necessary in this case to preserve logical linkages.

This International Standard is media independent. It assumes, at a minimum, that the supporting transport system can process fixed length octet strings. It requires a computer processing capability to map the user file or database data to the interchange file. This mapping function has to provide the necessary data and structure conversions. The parameters required to define the selection and conversion of these data items and structures into the formats specified by this International Standard are outside the scope of the standard. This International Standard requires the use of a basic character set based on ISO 8859-1 and ISO/IEC 6429 in control fields and permits the use of additional character sets in user data fields. This International Standard provides for three interchange levels from which the users may choose based on the complexity of their data structures. The first interchange level supports multiple fields containing simple, unstructured character strings. The second level supports the first level and multiple fields containing structured user data comprising a variety of data types. The third level supports the second level and hierarchical data structures.

The experience of implementing ISO/IEC 8211 for a variety of applications revealed the need for the changes introduced in this version. Many of the changes give ISO/IEC 8211 increased versatility and more effective interchange capabilities. Many other changes were made to improve clarity and user acceptance. Technical changes in the standardized interchange supporting this International Standard and changes in the organizational responsibility for this International Standard have led to other extensions. This version provides the user with an improved interchange tool in keeping with the user's increasing needs and well integrated into the OSI environment.

The retrieval of archived files may require the use of computer systems which are different from the original archiving systems. The operational problems are identical to those involved in the transport of files between computers at different sites and this International Standard provides a facility for this application.

ISO/IEC 8211 is based on ISO 2709 having the same record structure but different data description components. ISO 2709 based systems for file transfer and random file access had been in use since at least 1970 and their use is now extensive. The nomenclature of ISO/IEC 8211 conforms to its predecessor, ISO 2709. Its hierarchical, logical data constructs are files, variable-length records, variable-length fields and subfields. In several programming languages, the equivalent of an ISO/IEC 8211 field is a record and specific applications will transport their records as ISO/IEC 8211 fields with related records aggregated into ISO/IEC 8211 records.

Organization of the Standard

The contents of this standard are organized as follows:

- 1) Clause 5 describes the specifications of the contents of leaders, directories and field areas common to all logical records and necessary to the import of logical records and complete fields.
- 2) Clause 6 describes the specification of the data description necessary to import user data at the subfield level. Subclause 6.1 specifies further subfields in the DDR leader which contain information pertinent to data description.
- 3) Clause 7 describes the use of extended character sets.
- 4) Annex A describes the FTAM registrations.
- 5) Annex B describes a methodology for specifying ISO/IEC 8211 file design and data descriptions.
- 6) Annexes C through H provide tutorial information on the methodology. The reader may wish to read Annex C prior to studying Clause 5 and Annex D prior to studying Clause 6.

IECNORM.COM: Click to view the full PDF of ISO/IEC 8211:1994

This page intentionally left blank

IECNORM.COM: Click to view the full PDF of ISO/IEC 8211:1994

Information technology – Specification for a data descriptive file for information interchange

1 Scope

This International Standard specifies an interchange format to facilitate the moving of files or parts of files containing data records between computer systems. The interchange format is not intended as a record format for the indigenous files of any specific system but may be used for this purpose. The standard defines a generalized structure which can be used to transmit, between systems, files or records containing a wide variety of data types and data structures. It specifies the means for the description of the contents of data records but does not specify their application semantics although these semantics can be included as a part of the transmission. The interchange format may also be used to transport individual records, individual data fields or individual subfields with their description.

This International Standard specifies:

- media-independent file and data record descriptions for information interchange;
- the description of data elements, vectors, arrays and hierarchies containing character strings, bit strings and numeric forms;
- a data descriptive file composed of a data descriptive record and companion data records that enable interchange to occur with minimal specific external description;
- the data descriptive record that describes the characteristics of each data field within the companion data records;
- three levels of complexity of file and record structure;
- FTAM unstructured and structured document types

2 Normative references

The following standards contain provisions which, through reference in the text, constitute provisions of this International Standard. At the time of its publication, the editions indicated were valid. All standards are subject to revision, and parties to agreements based on this International Standard are encouraged to investigate the possibility of applying the most recent editions of the standards indicated below. Members of IEC and ISO maintain registers of currently valid International Standards.

ISO/IEC 646:1991, *Information technology - ISO 7-bit coded character set for information interchange*

ISO 2022:1986, *Information processing - ISO 7-bit and 8-bit coded character sets - Code extension techniques*

ISO 6093:1985, *Information processing - Representation of numerical values in character strings for information interchange*

ISO/IEC 6429:1992, *Information technology - Control functions for coded character sets*

ISO 8571-1:1988, *Information processing systems - Open Systems Interconnection - File Transfer, Access and Management - Part 1: General Introduction*

ISO/IEC 8824:1990, *Information technology - Open Systems Interconnection - Specification of Abstract Syntax Notation One (ASN.1)*

ISO 8859-1:1987, *Information processing - 8-bit single-byte coded graphic character sets - Part 1: Latin alphabet No. 1*

ISO/IEC 9834-2:—1993, *Information technology - Open Systems Interconnection - Procedures for operation of OSI Registration Authorities: Part 2: Registration procedures for OSI document types*

ISO/IEC 10646-1:1993, *Information technology - Universal Multiple-Octet Coded Character Set (UCS) - Part 1: Architecture and Basic Multilingual Plane*

IEC 559:1989, *Binary floating point arithmetic for microprocessor systems* (also ANSI/IEEE 754:1985(R1991))

The following document is also relevant to this International Standard:

ISO International register of coded character sets to be used with escape sequences

3 Conformance

Interchange files conform to this International Standard when all of the data descriptive records and data records conform to the specifications of this International Standard. A statement of conformance shall specify the version number and interchange level to which the contents of files conform.

This International Standard does not specify requirements for processing and implementation, therefore such processing and implementation cannot itself conform to this International Standard.

4 Definitions and abbreviations

4.1 Definitions

For the purposes of this International Standard the following definitions apply:

4.1.1 alphanumeric character: A character occurring in columns 2 to 7 inclusive (except position (7/15)) of the Basic Character Set or the corresponding characters of ISO/IEC 10646 Table 1 - Row 00: Basic Latin. These characters correspond to those of ISO/IEC 646 IRV.

NOTE 1 - The characters specified in this International Standard are represented by their position (column/row) in the coded character set table or by their acronym or name, e. g., ESC, SPACE and DIGIT ZERO or "0". Alphanumeric characters which are explicitly specified in a control field are enclosed in double quotes, e.g., "1". The special ISO/IEC 8211 delimiters unit terminator(1/15) and field terminator(1/14) are represented by UT and FT respectively.

4.1.2 array: A data structure of two or more dimensions.

4.1.3 array descriptor: A Cartesian label or numeric array descriptor which provides a description of the dimension and extents of an array.

4.1.4 base address of data: A data element the value of which is equal to the octet count up to but not including the first octet of the first data field following the field terminator of the directory, where the specified origin (0) is the first octet of the leader.

4.1.5 basic character set; BCS: A character set comprising: a) ISO 8859-1 including SPACE as the G0 and G1 sets and b) ISO/IEC 6429 as the C0 and C1 sets.

NOTE 2 - This set is compatible with row 00 of the ISO/IEC 10646 Basic Multilingual Plane and should greatly reduce any dependence on national variant character sets. However there currently are differences in the allowed uses of the C1 set between ISO/IEC 6429 and ISO/IEC 10646.

4.1.6 binary form: A binary form is a sequence of one or more octets having a specified format and meaning. The octets of a binary form may be recorded in order of decreasing significance with the most significant octet first (MSOF) or the reverse order, least significant octet first (LSOF). The bits within an octet are always recorded in order of decreasing significance.

4.1.7 binary tree: A rooted tree in which each node has zero subtrees or, at most, two subtrees known as the left subtree and the right subtree. In the absence of either the left or right subtree, the remaining subtree retains its identity as a left or right subtree. See annex F.

4.1.8 bit field: A data field comprising only binary digits. When it is necessary to complete an octet, it is filled on the right with binary zeros. See also **character mode bit string**.

4.1.9 Cartesian label: An array of identifiers formed by the Cartesian product of the elements of two (or more) vector labels. The array elements have the same order as the elements of the direct product such that if a and b are the vector labels, where $a = (a(1) \dots, a(n))$ and $b = (b(1) \dots, b(m))$, then the Cartesian label, $a^*b = (a(1)b(1), a(1)b(2), \dots, a(1)b(m), \dots, a(n)b(m))$, where $a(i)b(j)$ is a concatenation of $a(i)$ and $b(j)$ which forms an identifier of the j,i -th element of a corresponding data array (i.e., the "a"s are the row labels and the "b"s are the column labels). The Cartesian label is the most general form of a label and contains a vector label and a single label as special cases. The expansion of a higher order Cartesian label is from the left, i.e., $a^*b^*c = (a^*b)^*c$, that is, a^*b is expanded first.

4.1.10 character mode bit string: A sequence of alphanumeric characters, i. e. "0" or "1", that represents a string of binary digits. See also **bit field**.

4.1.11 compound data field: A field comprising one or more subfields each containing an elementary data element.

4.1.12 corresponding binary tree: A binary tree which represents the structure of an ordered, rooted tree. The first (leftmost) offspring of a node in an ordered rooted tree becomes the root of the left subtree of the binary tree and the siblings of the node are connected through a series of right-hand links. The preorder traversal sequence of an ordered, rooted tree and its corresponding binary tree are identical.

4.1.13 data descriptive field: A tagged field, residing in the DDR, containing the ISO/IEC 8211 data description for all data fields in the file associated with the same tag.

4.1.14 data descriptive file; DDF: A file containing a data descriptive record and its companion data records.

4.1.15 data descriptive record; DDR: A logical record that contains the control parameters and data definitions necessary to interpret its companion data records. The data descriptive record is the first logical record of a file.

4.1.16 data field: A tagged field which contains user data and is located in a DR.

4.1.17 data record; DR: A logical record containing user data.

4.1.18 delimited structure: A data structure composed of a collection of data elements that are separated by delimiters.

4.1.19 delimiter: A single character that separates data elements and data subfields. See 6.4.1, Table 1 for the use of delimiters.

4.1.20 directory: A field containing an array of identifiers and references to corresponding items of data. It is terminated by a field terminator.

4.1.21 directory entry: A fixed-length field within the directory that contains information about the field tag, the length and the location of a specific field within a given record.

4.1.22 elementary: Having the property of being indivisible without loss of meaning.

4.1.23 entry map: A field in the leader that is used to indicate the structure of the entries in the directory.

4.1.24 escape character; ESC: A control character which is used for code extension purposes. It causes the meaning of a limited number of bit combinations following it to be changed. The use of ESC is specified in ISO 2022.

4.1.25 external file title: A string of characters that provides a displayable descriptive title for the interchange file. This need not be the same as the host system file name.

4.1.26 field: A generic term used to describe a contiguous set of octets containing one or more values. The components of a field are referred to generically as subfields. See also **subfield 2**.

4.1.27 field tag; tag: A character string in a directory entry used to identify a data field or an associated data descriptive field.

4.1.28 field terminator; FT: A character, (1/14), used to terminate a variable-length field within a record.

4.1.29 file: A collection of related records treated as a unit.

4.1.30 forest: An ordered set of disjoint, ordered, rooted trees.

4.1.31 interchange format: A format for the exchange, as opposed to the local processing, of data.

4.1.32 interchange level; level: The designation of a prescribed subset of the requirements of this International Standard.

4.1.33 leader: A fixed-length field that occurs at the beginning of each record and provides parameters for the processing of that record.

4.1.34 least significant octet first; LSOF: An ordering of octets in which the least significant octet is placed closest to the beginning of a file.

4.1.35 location; position: The octet count to the position of the first octet of a field. Locations in the leader and directory are relative to the first (0) octet of the leader, and the locations of fields are relative to the base address of data.

4.1.36 map; to map: To establish the correspondence between the elements of two different data structures.

4.1.37 media record: The physical record which is characteristic of a medium and which is written on the media by a single system level write statement, e.g., a block or a sector or a transmission packet. (see also **record**)

4.1.38 most significant octet first; MSOF: An ordering of octets in which the most significant octet is placed closest to the beginning of a file.

4.1.39 n-tuple: A vector, each instance of which has n ordered elements.

4.1.40 null: The non-occurrence of an entity, usually a data element, string or set.

4.1.41 numeric array descriptor: A sequence of numbers which specifies the number of dimensions and extent of each dimension of an array.

4.1.42 ordered, rooted tree; tree; hierarchy: A data structure comprising a set of nodes having directed links such that one node, the root node, has no incoming links, the remaining nodes have precisely one incoming link, and the order of multiple outgoing links from a node is significant. The nodes are referred to as parent nodes and offspring nodes and link direction is from parent node to offspring node.

4.1.43 position: see **location**.

4.1.44 preorder traversal sequence: A sequence of the nodes of an ordered, rooted tree which is produced by the following recursive algorithm:

- a) Enter the tree at the root node.
- b) Traverse the left-most subtree not previously traversed,
if no such subtree exists, stop.
- c) If b) is not possible, return to the node superior to the subtree and go to b).

4.1.45 record; logical record: A contiguous string of octets in an interchange file, the first five being the record length (see also **media record**).

4.1.46 record length: A data element the value of which is equal to the length in octets of the record.

4.1.47 recursive tree: A tree in which a node appears in its own subtree.

4.1.48 relative position; RP: The position of an octet expressed as a decimal integer relative to the beginning of a record, field or subfield. The relative position of the first octet is numbered "0."

4.1.49 signed binary integer: A two's complement binary number.

4.1.50 subfield: 1) A contiguous string of octets in a field whose position, length and data type are described in the field data description; 2) generically, a component of a field.

4.1.51 subfield label: A character string used in the data description to identify a subfield and its contents.

4.1.52 tagged field: A contiguous string of octets in a record which is identified by a field tag and whose length and relative position are specified in a directory entry. A tagged field may occur in the DDR or in the DRs.

4.1.53 tag: see field tag.

4.1.54 unit terminator; UT: A character, (1/15), used to delimit several types of subfields within variable-length fields in both DDR and DR.

4.1.55 variable-length field: A field, the length of which may vary from occurrence to occurrence.

4.1.56 vector: A one dimensional data structure each instance of which may have a variable number of elements. (see also n-tuple}

4.1.57 vector label: A vector the elements of which are labels used to identify each element in a vector of data elements. A vector label is a special case of a Cartesian label.

4.2 Abbreviations

For the purposes of this International Standard the following abbreviations apply:

BCS	basic character set
DDF	data descriptive file
DDR	data descriptive record
DFD	data field description, see B.2
DR	data record
ESC	escape character
FT	field terminator
FTAM	file transfer and access management
LR	logical record
LSOF	least significant octet first
MSBF	most significant octet first
RP	relative position
SPACE	SPACE character
TAB	horizontal tabulation character
UT	unit terminator
level	interchange level
tag	field tag
0..n	a tag with zero or more leading ZEROS

5 Interchange file and logical record structure

This clause specifies the general requirements for an interchange file and the requirements which are common to all logical records. These requirements specify the structure of logical records external to the fields. The requirements for the contents of the fields and the description of the contents of data fields are given in clause 6. See Annex C for an informal description of the constructs of this clause.

An introductory schematic for ISO/IEC 8211 files, logical records and their components is shown in Figure 1.

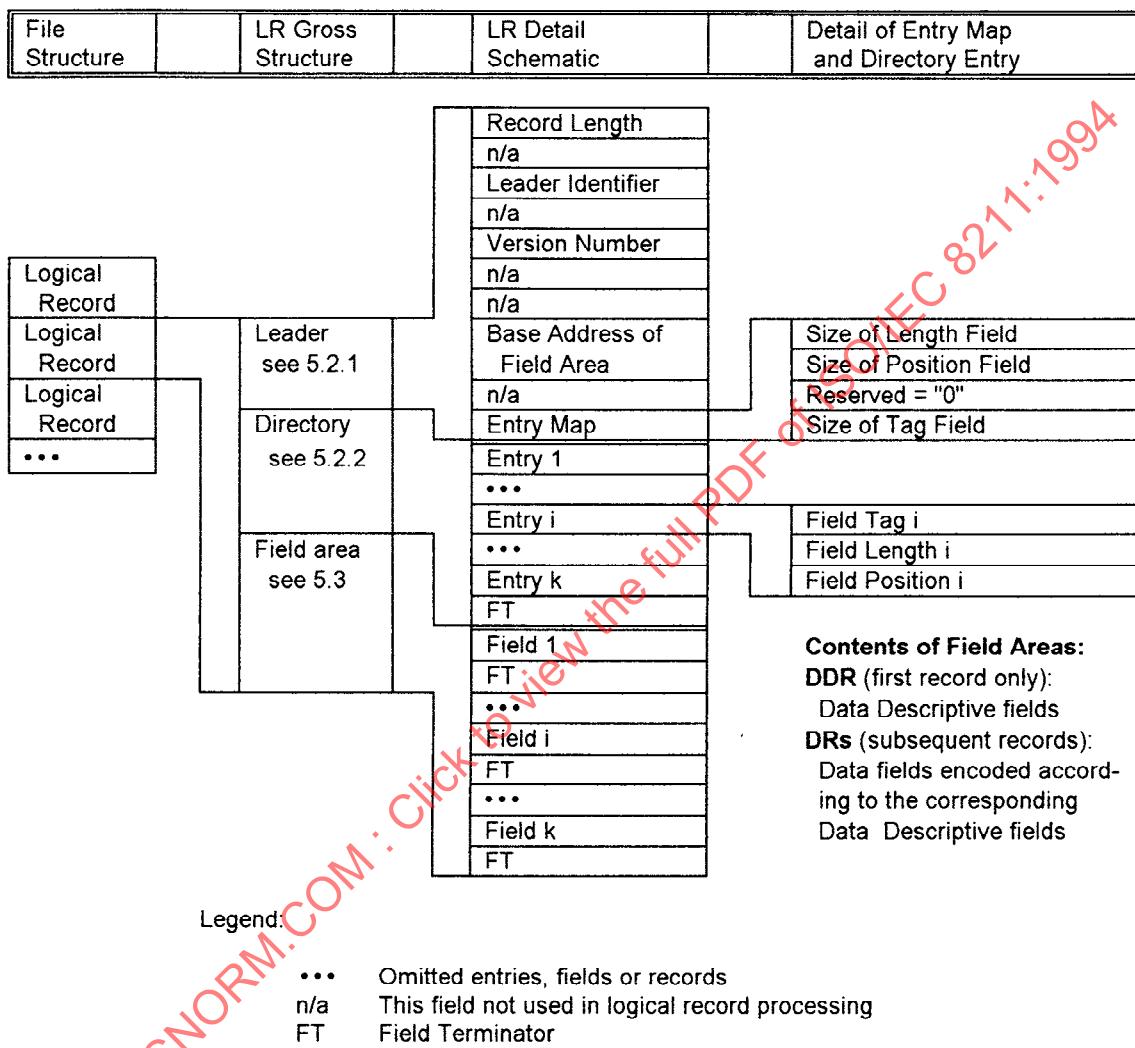


Figure 1 - Schematic of ISO/IEC 8211 File and Logical Records

The leaders of all records contain the parameters necessary to read records and disaggregate the directory into its entries. Additionally the DDR leader contains a few data descriptive parameters applicable to the entire file.

The directories of all records contain the parameters necessary to identify and locate each field in the Field Area.

In the first record only, the DDR, the Field Area contains data descriptive fields, each containing the information necessary to decode the user data in the Field Areas of the following DRs.

5.1 File and logical record structure

This International Standard specifies Data Descriptive Files (DDFs), each comprising Logical Records (LRs).

The files may be recorded on a physically dismountable medium or transported through a communications system. When recorded on a medium for which an International Standard for volume and file structure exists, each file shall have the required International Standard interchange file labels or headers for the particular medium. The file, when recorded on a suitable media volume, may be accessed sequentially or randomly.

An ISO/IEC 8211 interchange file set shall comprise one or more instances of the collection of items depicted in figure 2.




Figure 2 - File Schematic Representation

The DDR is the first logical record of each DDF.

5.1.1 Interchange logical records

The logical records specified in this International Standard shall be written, blocked and spanned, across the fixed-length, media physical records (blocks or sectors) or transmission packets without any further record demarcations.

5.1.2 Padding of records and media blocks

Any unused portion of a fixed-length, logical record without a leader/directory and any unused portion of a media block or its equivalent shall be padded with the CIRCUMFLEX character, (5/14).

NOTE 3 - This specification gives a satisfactory and detectable end of file condition under all known circumstances. The logic for processing the end-of-data and end-of-file condition is discussed in C.1.6.

5.2 Logical records - leaders and directories

This subclause contains specifications for logical records and their fields and for the parameters of leaders and directories of logical records which are involved in record processing. Both numeric and binary encodings of some leader and directory parameters pertaining to the octet counts are supported and are described in 5.2.1.6. The DDR leader parameters involved with data description are described in 6.1.

The logical records shall consist of the areas shown in figure 3.

Name of Area	Length
Leader	24
Directory	$k \times p + 1$
Field Area	variable

where k is the number of directory entries and
 p is the number of octets in a directory entry of the record.

Figure 3 - Logical Record Schematic

5.2.1 Logical record leader

Each LR Leader shall consist of the fields shown in figure 4 and which are further specified in 5.2.1.1 to 5.2.1.5 and 6.1.

The "Use" column in figure 4 designates the use of each field as a record processing control. "All" indicates that a meaningful value exists in the field for all records, "DDR" indicates that a meaningful value exists in the field for the DDR only.

RP	Len.	Use	Field Name	LR Leader DDR	Contents DR	Reference
0	5	All	Record Length	octets	octets	5.2.1.1
5	1	DDR	Interchange Level	"1" "2" "3"	SPACE	6.1.1
6	1	All	Leader Identifier	"L"	"D" "R"	5.2.1.2
7	1	DDR	Inline Code Extension Indicator	character	SPACE	6.1.2
8	1	DDR	Version number	SPACE "1"	SPACE	5.2.1.3
9	1	DDR	Application Indicator	character	SPACE	6.1.3
10	2	DDR	Field Control Length	digits	SPACES	6.1.4
12	5	All	Base Address of Field Area	octets	octets	5.2.1.4
17	3	DDR	Extended Character Set Indicator	characters	SPACES	6.1.5
20	4	All	Entry Map	digits	digits	5.2.1.5

Figure 4 - LR Leader Schematic

5.2.1.1 record length field (LR RP 0-4)

This field shall specify the total length of the LR in octets including the five octets of this field (see 5.2.1.6 for the syntax).

5.2.1.2 leader identifier field (LR RP 6)

This field shall identify the type of logical record and specify the nature of the leader and directories.

When all remaining data records in a DDF would have identical leaders and directories, it is permissible to place an "R" in its Leader Identifier field and to omit the leader and directory from subsequent records,

The allowed values and meanings of the leader identifier shall be:

L	means that the record is the Data Descriptive Record
D	means that the record is a Data Record and that the next data record has a leader and directory.
R	means that the record is a Data Record and that a leader and directory will not be found in any of the subsequent LRs. The leader and directory of the current LR shall be applied to each of the subsequent LRs.

5.2.1.3 ISO/IEC 8211 version number (LR RP 8)

In the DDR, this field shall contain the identification of the version of ISO/IEC 8211 to which an interchange file conforms. The version number places conditions and constraints on both record and data description processing. The allowed values and meanings shall be:

Value	Meaning
SPACE	ISO/IEC 8211 - 1985
"1"	this version

This field is unused in the remaining logical records, the DRs, and shall contain SPACE.

5.2.1.4 Base address of field area (LR RP 12-16)

This field shall specify the relative position of the first field of the Field Area and its value shall be equal to the combined length in octets of the leader and directory including the field terminator at the end of the directory (see 5.2.1.6).

5.2.1.5 Entry map field (LR RP 20-23)

RP	Name of Subfield	Length	Contents
20	Size of Field Length Field	1	digit
21	Size of Field Position Field	1	digit
22	Reserved for future standardization	1	DIGIT ZERO
23	Size of Field Tag Field	1	digit

Figure 5 - LR Entry Map Schematic

This field specifies the lengths of directory entry subfields in each LR and shall consist of the subfields shown in figure 5 (see 5.2.1.6).

5.2.1.5.1 Size of field length field (LR RP 20)

This subfield shall specify the size in octets of the Field Length field of the directory entries and shall be a digit in the range of "1" to "9" inclusive.

5.2.1.5.2 Size of field position field (LR RP 21)

This subfield shall specify the size in octets of the Field Position field of the directory entries and shall be a digit in the range of "1" to "9" inclusive.

5.2.1.5.3 Reserved for future standardization (LR RP 22)

This subfield is reserved for future standardization as an extended entry map. Its value shall be the digit "0".

5.2.1.5.4 Size of field tag field (LR RP 23)

This subfield shall specify the size in octets of the Field Tag field of the directory entries and shall be a digit in the range of "1" to "7" inclusive. The value in this subfield shall be the same in all LRs.

5.2.1.6 Alternate forms of counts and field positions.

This International Standard provides for both numeric and binary encoding of octet counts and positions.

The content of the fifth octet of the DDR Record Length (DDR RP 4) shall signal the use of the alternate forms. The allowed values shall have the following meanings:

Value	Signifying that.
"0"-"9"	the character form is used (the flag is the least significant digit of the value)
"B"	the MSOF binary form is used
"b"	the LSOF binary form is used

The forms shall be mutually exclusive and the same form shall be used in the leader/directories throughout the file.

The leaders and directories of the LRs shall have one of the following forms for the contents of the Record Length field, the Base Address of Field Area field, the Field Length field and the Field Position field:

a) a character form comprising decimal digits, in which these fields shall contain a right-adjusted decimal integer filled on the left by ZEROS. A value of zero in the Record Length field shall specify a record length in excess of 99999.

b) a binary form comprising a signed binary integer and, in the DDR Record Length field only, a form flag. The first four octets of the Record Length field and Base Address of Field Area field shall be used to record a 32-bit signed binary integer. Each instance of an Entry Map shall be limited to a single set of values from the following list: 1,1,0,2; 2,2,0,2; 2,2,0,4 or 4,4,0,4. The values of the field length and field position shall be either 8-bit, 16-bit or 32-bit signed binary integers as appropriate depending upon the field sizes specified in the Entry Map. The maximum size of DDF record components shall be limited to the maximum value which can be placed in the corresponding control field. The unused positions, DR RP 4 and LR RP 16, shall contain a "0".

5.2.2 Logical record directory

The LR directory shall consist of repeated LR directory entries, the field lengths of which shall be specified in the entry map field (see 5.2.1.5). The LR directory shall contain one LR directory entry for each field in the Field Area and shall end with a field terminator.

The LR directory entry specifies the location and length of the corresponding field in the field area and shall consist of the subfields shown in figure 6. Each entry shall contain a Field Tag, Field Length, and Field Position in that sequence, and shall consist of $m+n+t$ octets, where:

- m is the size of the Field Length Field
- n is the size of the Field Position Field
- t is the size of the Field Tag Field

The LR directory entries shall be in one to one correspondence with the fields and in the same order.

The location, length and contents of each directory entry are specified in figure 6 and their meanings are specified in clauses 5.2.2.1 to 5.2.2.3.

RP	Name of Field	Length	Contents
$p(i-1)$	Field Tag	t	alphanumeric digits
$p(i-1)+t$	Field Length	m	
$p(i-1)+t+m$	Field Position	n	

where $p = t + m + n$ and i = the index of the directory entry.

Figure 6 - LR Directory Entry Schematic

5.2.2.1 Field tag field

This field shall contain a Field Tag identifying the corresponding field and shall consist of between one and seven alphanumeric characters as specified in the Entry Map (see 5.2.1.5.4).

5.2.2.2 Field length field

This field specifies the length in octets of the corresponding field (see 5.2.1.6). The length of the field shall include the field terminator.

5.2.2.3 Field position field

This field specifies the relative position of the first octet in the corresponding field (see 5.2.1.6). It shall contain a value which when added to the base address of the Field Area shall result in the relative position of the first octet of the field referenced.

NOTE 4 - The field position of the first field following the directory is zero.

5.3 Logical record field areas

This subclause contains the general requirements of the field areas of logical records. Additional requirements for field areas related to the details of data description are found in 6.2, 6.3 and 6.4.

The field area of the first logical record (the DDR) shall contain Data Descriptive Fields describing the Data Fields of the file. The field areas of the subsequent logical records (the DRs) shall contain the Data Fields as described in the Data Descriptive Fields of the DDR. The field tags in the DDR and DR shall be used to associate the Data Descriptive Fields with the corresponding Data Fields.

The order of the tagged fields of a field area shall be the same as the order of the tags in the directory of the record.

5.3.1 Field area of the DDR

The Field Area of the DDR shall contain one and only one Data Descriptive Field for each data Field Tag that may be used in the Data Records.

5.3.2 The field areas of the DRs

The data fields of the Field Area of the DRs shall contain the actual data to be interchanged. Each data field shall be associated with an entry in the directory of the DR containing it, and the tag in that directory entry, by reference to the corresponding tag in the DDR and its Data Descriptive Field, may be used to interpret the data field.

A data field may be terminated prematurely at the end of a subfield prior to the end of its data description. The subfields shall contain the data elements corresponding to the expanded array descriptor contained in the corresponding DDR field. Each field shall end with the field terminator. In a delimited structure missing data elements shall be represented by successive delimiters. The null values to be associated with the missing data elements of a fixed-length subfield are not defined. In a user data field, a single terminal subfield delimiter or a terminal string of adjacent subfield delimiters may be omitted.

A data field, described in the DDR, may have zero or more instances in a DR Field Area. The directory entries corresponding to missing fields shall be omitted from the directory unless required to describe the data structure of a level 3 DDF (see 6.1.1).

5.3.2.1 User data fields

Each data field shall conform to the Data Descriptive Field associated with the same Field Tag located in the DDR. Each data field shall end with a Field Terminator. The description of the user data is further defined in 6.3 and 6.4.

Character data fields whose termination is determined by a field length, format width, user determined delimiter or field terminator may contain a unit terminator character which shall be treated by an implementation as a user data character.

5.3.2.1.1 Elementary data fields

The data fields of the DR shall contain a single string of octets terminated by the field terminator.

5.3.2.1.2 Compound data fields

The data fields of the DR shall contain a single string of octets comprising subfields, terminated by the field terminator.

6 Description of user data types and structures

This clause contains specifications for the description of the user's data fields. See clause C.2 and annex D for an informal discussion of the constructs of this clause.

6.1 DDR leader fields related to data description

This subclause contains additional specifications for the DDR leader which are related to data description and which are applicable to the entire file.

In addition to the fields contained in all LRs, the DDR leader shall also contain meaningful values in the DDR specific fields, as shown in figure 4 and further specified in 6.1.1 to 6.1.5.

6.1.1 Interchange level field (DDR RP 5)

This field shall specify the level of the interchange file. The content of this field shall be the digit "1", "2" or "3" and these shall have the following meanings:

"1"	the file is a level 1 file
"2"	the file is a level 2 file
"3"	the file is a level 3 file

In a level 1 file the Data Fields of the DDR shall contain octet strings which are not differentiated into ISO/IEC 8211 subfields.

In level 2 and level 3 files the Data Fields of the DDR shall contain compound data fields which are described by the corresponding Data Descriptive Fields. In a level 3 file there is an additional inter-field hierarchical structure.

For level 3 files, the tags and fields of the LR shall be in the same order as the preorder traversal sequence of the corresponding fields of the ordered, rooted tree of the LR. In the absence of the 0...1 Field Tag, the first Field Tag of the preorder traversal sequence shall be the root node of the tree.

NOTE 5 - The clauses which have substantive reference to level specifications are:

Level	Relevant clauses
1	6.3
2	6.4
3	6.2.1.3, 6.2.6, 6.4

6.1.2 Inline code extension indicator (DDR RP 7)

This field shall specify the coded character set methodology used and if additional inline coded character sets are used. SPACE shall mean that there are no character sets other than the basic character set used in the file.

NOTE 6 - The other values for this field are specified in clause 7.

6.1.3 Application indicator field (DDR RP 9)

This field contains identification of the user application standard under which a file was produced. SPACE shall mean that there is no identification of the application. The value "A" shall specify a reference to another standard (see 6.1.3.1). The values "B" to "Z" inclusive are reserved for future standardization. Other values are reserved for private use.

6.1.3.1 Reference to other standards

The value "A" shall mean that another standard is used to specify the content and semantics of the transferred information and the numerical form of the Object Identifier Arcs of the applicable standard will be found in the first subfield of the User Application field (tag = 0...2, see 6.2.3) followed by an UT when additional user text is required.

NOTE 7 - The syntax and semantics of the Object Identifier Arcs are specified in ISO/IEC 8824-1 Annexes B, C and D.

6.1.4 Field control length field (DDR RP 10-11)

This field shall specify the number of octets of the Data Descriptive Field devoted to data element type and structure codes, delimiters, truncated escape sequence (if any) and other positions reserved for future standardization.

The contents of this field shall be:

Level	Non-extended sets	Extended sets
1	"00"	"03"
2 or 3	"06"	"09"

where non-extended and extended sets refer to the use of fieldwise code extensions facilities (see 6.1.5).

6.1.5 Extended character set indicator field (DDR RP 17-19)

This field shall specify the filewise default coded character set used or if filewise default character sets are defined. SPACES shall mean that there are no default character sets defined for this file.

NOTE 8 - The values for this field are specified in clause 7.

6.2 Special field tags (tags = 0...0 to 0...9)

This subclause contains requirements for special field tags and the contents of their Data Descriptive Fields which are applicable to the entire file and which are not applicable to an isolated data field.

6.2.1 File control field (tag = 0...0)

The file control field shall be present only in the DDR, shall have the tag 0...0 and shall contain the following subfields (see figure 7):

- a) the field controls (if any),
- b) an optional external file title,

- c) for level 3 only, a unit terminator followed by a list of field tag pairs,
- d) terminated by a field terminator.

Field Controls	External File Title	UT	List of Field Tag Pairs	FT
----------------	---------------------	----	-------------------------	----

Figure 7 - File Control Field Schematic

6.2.1.1 Field control field

These field controls are a special case of the field controls described in 6.3 and 6.4.2. The first four octets for level 2 and 3 files shall contain the value "0000".

NOTE 9 - The printable graphics and escape sequence of the field controls are applicable only to the External File Title as there are no corresponding DR fields.

6.2.1.2 External file title field

This field shall specify an optional external file title. If present it shall contain a character string which shall be an external descriptive name for the interchange file.

6.2.1.3 List of Field tag pairs

In a level 3 DDF, many ordered rooted trees may be described by the use of the list of field tag pairs and the preorder traversal sequence of the tree. See annex F for technical background.

NOTE 10 - Trees which cannot be represented by this method can be represented by the method of 6.2.6.

The list of field tag pairs is the parent/offspring binary relation of the tags of the DDR which with the preorder traversal sequence of the DDR describe a generic tree structure for the DDF. These pairs may be placed in the list in any sequence and shall be logically contiguous. Field tags 0...0 and 0...2 to 0...9 inclusive shall not participate in the structure specification.

NOTE 11 - The variable hierarchical data structures permitted in the DR are described by supplying the preorder traversal sequences of the data tree and a list of the field tag pairs expressing the parent/offspring logical association between the nodes of the data tree. The data structures of the DR shall be derived from the generic data tree by the repetition or deletion of nodes and subtrees. The preorder traversal sequence of the generic data tree is supplied by the order of the DDR directory entries. The preorder traversal sequence of each instance of a derived data tree in a DR is supplied by the sequence of directory entries in the DR. See annex F for further explanation of ordered field tag pairs. A forest may be represented as an ordered, rooted tree by creating ordered links from the root node of the first tree to the root nodes of the remaining trees in the proper order.

6.2.2 Record identifier field (tag = 0...1)

The optional Record Identifier Field, if present, is a normal user Data Field, whose content is specified by the user. Each DR shall contain zero or one Record Identifier Fields. The content of the Record Identifier Field shall conform to the corresponding DDR Data Descriptive Field.

If used, the field corresponding to field tag 0...1 shall be the Record Identifier Field, and except for the LINKS field (tag = 0...9, see 6.2.6), shall occur first in the DR directory and shall be the root of any hierarchy (see 6.2.1.3).

6.2.3 User application field (tag 0...2)

If used, the field with the field tag 0...2 shall be present only in the DDR and shall contain application specific information. An implementation shall pass this field to the user for processing.

NOTE 12 - The contents of this field are determined by the user and may be used to convey any augmented file description (e.g., file attributes relevant to the interchange) or ancillary file processing controls or application information. See 6.1.3.1 for the use of this field to identify other standards.

6.2.4 Announcer sequence or feature identifier field (tag 0...3)

If used, the field with the tag 0...3 shall be present only in the DDR and shall contain the set of announcer sequences or feature identifiers for extended code set services, see clause 7.2.4 and 7.3.3. Any control characters in this field shall be encoded as their ISO/IEC 6429 mnemonics (see B.2.6). An implementation shall pass this field to the user for processing.

6.2.5 Fields reserved for future standardization

Fields with tags 0...4 through 0...8 shall be reserved for future standardization and shall not be present in the DDR.

6.2.6 Recursive tree LINKS field (tag = 0...9)

NOTE 13 - This field is necessary to describe recursive trees which cannot be described by the list of Field Tag Pairs.

In each DR, a recursive tree shall be described by the left- and right-hand links of the corresponding binary tree. These links shall be placed in a reserved field having the field tag 0...9, and the following data description (see 6.4):

2f00;&LINKS&*LLINK!RLINK&(intfmt); where

<i>intfmt</i>	is an integer format control, is the data type code;	= I, I(<i>d</i>) or B2w, = 1 for I formats, = 5 for B formats,
<i>d</i>	is the subfield width of an I format, is the precision of a B format.	

When present, the LINKS field shall be the first field in the DR directory and field area and shall not participate in the tree structure. The remaining DR field tags and fields shall occur in the preorder traversal sequence of the tree. The left- and right-hand links to the offspring fields shall occur in the preorder traversal sequence and shall comprise the indices of the directory entries of the corresponding fields (see the example of F.2). When there is no link, the corresponding left- and right-link shall be zero. When present, the tree structure defined by the LINKS field shall supersede that defined by the field tag pairs.

The LINKS field may be used to define non-recursive trees.

NOTE 14 - A recursive tree cannot occur in the DDR and the DDR tree is described by its field tag pairs and preorder traversal sequence. The pre-order traversal sequence of the corresponding binary tree is the same as that of the ordered, rooted tree.

6.2.7 Order of special field tags in the DDR

When present, field tags 0...0 to 0...9 inclusive shall occur first in the DDR directory and in ascending numeric order.

6.3 Data descriptive fields in level 1 files

This subclause specifies the content of the Data Descriptive Fields of level 1 files. The user data of the corresponding Data Fields comprises octet strings without division into subfields.

A data descriptive field of a level 1 file shall comprise the following:

Field Controls	Data Field Name	FT
----------------	-----------------	----

A level 1 interchange file may have one Field Control parameter (the truncated escape sequence) whose presence is conditional upon the use of fieldwise default extended coded character sets. Its use and values are specified in clause 7.

The Data Descriptive Fields of level 1 files shall contain an optional Data Field Name which serves to identify the data field. The Data Field Name may be any string of characters.

6.4 Data descriptive fields in level 2 and 3 files

This subclause specifies the content of the Data Descriptive Fields of level 2 and 3 files. The user data of the corresponding Data Fields comprises subfields.

The data structures specified in this subclause shall be elementary, vector and array structures containing character strings, implicit point, explicit point, explicit point scaled, character mode bit string, bit string, binary forms and mixed data types. The data descriptive field shall contain control information, printable graphics, field name, array descriptors and data field format information as specified in 6.4.1 to 6.4.4 and clause 7.

6.4.1 Tabular summary of data descriptive fields of level 2 and 3 files

The data descriptive fields for compound data fields shall comprise the Field Control field, the Data Field Name field, Array descriptors and Format Controls. A schematic of a Data Descriptive Field is given in figure 8. Missing elements of the data description shall be represented by adjacent delimiters and a terminal string of adjacent delimiters shall not be replaced by the field delimiter. Table 1 specifies the use of delimiters in Data Descriptive Fields and in Data Fields. Table 2 summarizes the data descriptive field components which are specified in this clause and defined further in 6.4.2 to 6.4.4.

Field Controls	Data Field Name	UT	Array descriptor	UT	Format Controls	FT
----------------	-----------------	----	------------------	----	-----------------	----

Figure 8 - Schematic of Level 2 and 3 Data Descriptive Fields

Table 1 - Delimiters and Their Uses

Delimiter	Print Symbol	Record	Usage
FT [1]	; [2]	DDR,DR	Field terminator
UT [1]	& [2]	DR DDR DDR DDR	Unit terminator a) To delimit subfields in a field not specified by a format b) To delimit the Data Field Name c) To delimit the External File Title d) To delimit the array descriptor
"!"	!	DDR	To delimit subfield labels within a vector label
"*"	*	DDR	To delimit the vector labels within a Cartesian label.
"\\"	\	DDR	To delimit the array descriptors of concatenated structures.

[1] These characters are defined by the BCS codes, IS2 and IS1 ((1/14) and (1/15)). With the use of ISO/IEC 10646 codes they are represented by the appropriate multi-octet code (see clause 7 and ISO/IEC 10646 clause 16).

[2] The print symbols, ";" and "&" are the graphic characters used in examples throughout this document to represent the standard delimiters, FT and UT, which are non-printing characters in many systems. See 6.4.2.4.

Table 2 - Data Descriptive Field Components

Data Structure	RP 0, 1	Data Field Name & Array descriptor & Format Controls;
Elementary	0d	['Name'] & ['subfield label'] & ['fctrl'];
Vector	1d	['Name'] & ['Vector label'] & ['fctrl'];
Array	2d	['Name'] & ['Array descriptor'] & ['fctrl'];
Concatenated	3d	['Name'] & 'Concatenated data description' & ['fctrl'];

The syntax of table 2 is defined below:

- a) RP 0 contains the data structure code (see 6.4.2.1), RP 1 = "d" is a data type code (see 6.4.2.2).
- b) 'Name' is a data field name (see 6.4.3.1).
- c) 'Array descriptor' specifies one of five forms which identifies subfields and structure. These forms are: concatenated structure, numeric array descriptor, Cartesian label, vector label or subfield label (see 6.4.3.2).
- d) 'fctrl' specifies a format control (see 6.4.3.3).
- e) [] specifies the optional or conditional presence of the item.

6.4.2 Field controls

This clause specifies the position, values and meaning of the field control parameters which describe the contents of the DR user data fields. The length of the Field Controls field is specified by the contents of DDR RP 10-11. Level 2 and 3 interchange files have the following field control parameters.

6.4.2.1 Data structure code (RP 0)

The data structure code specifies the complexity of the data structure contained in the data field. It shall have one of the following values and meanings:

0	the dimension of the data structure is zero, i.e., a single data item
1	the dimension of the data structure is one, i.e., a linear structure
2	the dimension of the data structure is equal to or greater than two, i.e., a multi-dimensional structure
3	the data structure is concatenated

6.4.2.2 Data type code (RP 1)

The data type code specifies the type of data in a data field that comprises subfields of a single data type or mixed data types. It shall have one of the following values and meanings:

Value	The data type is.
0	character string
1	implicit point
2	explicit point
3	explicit point scaled
4	character mode bit string
5	bit string including binary forms
6	mixed data types

6.4.2.3 Auxiliary controls (RP 2-3)

The auxiliary controls further specify the data types contained in the user data field. Auxiliary controls are defined for bit field (data type code = "5") and specify binary forms. These are specified in clause 6.4.3.3 h). All remaining auxiliary controls are reserved for future standardization and shall be ZEROs signifying that no auxiliary controls are specified.

6.4.2.4 Printable graphics (RP 4-5)

The printable graphics are two graphics characters to be supplied by the sender in order that the receiver may use them to replace the standard delimiters for display purposes. They shall represent FT and UT in that order.

NOTE 15 - These characters do not affect interchange in any way. They should be characters which are seldom, if ever, used in the data and in the absence of information to the contrary should be limited to alphanumeric characters.

6.4.2.5 Truncated escape sequence (RP 6-8)

The presence of the truncated escape sequence is conditional upon the use of fieldwise default extended coded character sets. Its use and values are specified in clause 7.

6.4.3 Data field names, array descriptors and format controls

The use of data field names, array descriptors and format controls are specified below:

6.4.3.1 Data field name

A data field name is an optional identifier for a data field and its contents. National variant characters or characters from the default set as specified in clause 7 are permitted in data field names.

6.4.3.2 Array descriptors

An array descriptor shall consist of a numeric array descriptor or a generic label (i.e., a subfield label, a vector label or a Cartesian label) or a compound array descriptor.

NOTE 16 - A numeric array descriptor merely defines dimension and extents. Generic labels are optional and have the dual purpose of identifying the elements of an array as well as defining its dimension and extents. Labelling can only be applied to regular structures, i.e., those in which all instances have the same dimension and extents. The one exception to this is the "table": an array whose first extent, i.e., "row", repeats indefinitely and whose first vector label is, of necessity, null. This gives rise to unlabeled "rows". See 6.4.4 for the correspondence of labels and data elements.

The following specifications are phrased in terms of "rows" and "columns" but are also specifications applicable to regular structures of higher dimensions. The correspondence of the expansion of a Cartesian label to an array is given by the definition of a Cartesian label (see 6.4.3.2.4) and the storage order of an array (see 6.4.4.3).

6.4.3.2.1 Numeric array descriptor

A numeric array descriptor shall be used to specify the dimension and extents of an unlabeled data field.

NOTE 17 - The following constructs permit unlabeled arrays whose subfields are identified by position, i.e., subscripts.

Fixed array dimensions: If an array has a fixed dimension and extents in all data records and a Cartesian label is not required, the Cartesian label may be replaced by a numeric array descriptor which shall be comprised of the dimension of the array followed by the extent of each dimension, all separated by commas.

NOTE 18 - The following construct permits arrays whose instances in data fields have varying dimension and extents.

Variable array dimensions: In the absence of an array descriptor in the DDR, the DR data field shall be preceded by a positive integer specifying the dimension of an array and a series of positive integers specifying the extent of each dimension. The elements of this array description shall be delimited by unit terminators.

6.4.3.2.2 Subfield labels

A 'subfield label' specifies an optional single character string which shall identify a single data item. A 'subfield label' is a special form of a 'vector label'.

6.4.3.2.3 Vector labels

A 'vector label' specifies an ordered set of subfield labels which shall correspond to and identify the items of an ordered set of subfields in the data records and shall take the form, label1!label2!...!labeln. A 'vector label' is a special form of 'Cartesian label'.

6.4.3.2.4 Cartesian label

A 'Cartesian label' specifies a set of identifiers which shall comprise vector labels forming a Cartesian product the elements of which on expansion shall have an order corresponding to and shall identify the items of an ordered set of subfields in the data records. The Cartesian label shall take the form: label1!label2!...!labela!labelb!...!...

Cartesian labels, when expanded by the defining conventions (see 6.4.4.2), shall form an array of composite labels corresponding to the elements of the data array. The vector labels of a Cartesian label shall provide row and column headings for the appropriate cross section of the array. When a field contains a one dimensional structure, the 'generic label' shall be in the form of a corresponding vector label. When a field contains a single data item, the generic label is a single 'subfield label'.

NOTE 19 - The special cases of a vector containing one subfield and an array containing one vector are allowed.

The first vector label of a Cartesian label may be null permitting the description of a two- (or higher) dimensional array without "row" identifiers. A null first vector label shall be indicated by the adjacent delimiters UT and "!" or "\\" and "!!". The use of null individual subfield labels in vector labels is permitted provided all delimiters are present.

National variant characters or characters from the default set as specified in clause 7 are permitted in subfield labels. The symbols "!" and "!!" and "\\" are specific graphic characters used to delimit vector labels and compound Cartesian labels; therefore, "!" or "!!" or "\\" shall not appear in a vector label subfield.

A Cartesian label shall not consist of a single vector label composed of a single element containing solely digits and commas.

6.4.3.2.5 Description of concatenated structures

NOTE 20 - The intent of this construct is to allow the user to closely associate one or more small arrays with a larger array in order to reduce overhead.

A 'compound array descriptor' shall comprise two or more array descriptors concatenated together by "\\" and shall describe the corresponding number of concatenated regular data structures. The form of a compound array descriptor shall be:

array_descriptor_1\\array_descriptor_2\\...\\array_descriptor_n

The last and only the last array descriptor of a compound array descriptor label may have a null first vector label. The data structure code of a field containing concatenated structures shall be "3".

6.4.3.3 Format controls

The format controls specify the character-by-character or bit-by-bit syntax of the data field. The format controls are mandatory for the bit string data type and mixed data types and optional for all other data types when the Field Control Field completely specifies the data format. The lack of format controls indicates subfields delimited by the standard delimiter for all data types except for the binary forms which have fixed precisions. The format controls are required to specify the sequence and type of the subfields in a mixed data field or to specify the field width in non-delimited subfields or to specify the user delimiters.

NOTE 21 - The format controls are hierarchical and can describe irregular structures that cannot be labelled.

The format controls shall be pre-delimited by the unit terminator and post-delimited by the field terminator, and shall take the form:

$\{\{Y \mid mY \mid k(mY, \dots, \dots), \dots\}, \dots\}$

where

$Y \quad \text{implies } Z \mid Z^* \mid Z(n) \mid E,$

Z is one of the following:

A	signifying character data,
I	signifying implicit-point,
R	signifying explicit-point,
S	signifying explicit-point, scaled,
C	signifying character mode bit string,
B	signifying bit string data,
X	signifying unused character positions.

E is one of the following:

Btw	signifying the MSOF binary form,
btw	signifying the LSOF binary form.

{}	implies the enclosed expression is to be treated as an entity for purposes of repetition and nesting,
	implies an alternate choice,
(*), (n)	are subfield width specifications,
*	is an arbitrary user delimiter,
n	is a positive integer specifying the subfield width in octets,
t	is a positive integer specifying the binary form subtype (see 6.4.3.3 h)).
w	is a positive integer specifying the precision of the binary form (see 6.4.3.3 h)).
m, k	are positive integers signifying the number of times the following data type or group of data types, respectively, is to be repeated,
...	implies repetition of the preceding expression.

The use of the format controls is governed by the following rules:

- The order of subfields and their types specified with format controls shall correspond to the data field when the format controls shall be traversed from left to right expanding the nested terms from the left. If a repetition factor is not present the value one shall be used. If the data field is not exhausted, the format shall repeat from the left-hand parenthesis corresponding to the next to the last right-hand parenthesis not including those parentheses used to delimit subfield width and using the associated repetition factor if any. If there is no such right-hand parenthesis, format control shall revert to the first left parenthesis of the format specification.

A format, starting and ending with fixed-length bit string subfields, not including binary forms, shall not be rescanned from a single leftmost parenthesis. When such a format is to be rescanned the format shall be enclosed in an additional pair of parentheses. Two consecutive opening parentheses shall not be used for any other purpose in formats of this type.

NOTE 22 - This requirement is necessary to prevent the interpretation of zero fill as data.

- Z - implies delimiting of the DR fields by the unit terminator and, optionally, in the case of the last subfield, by the field terminator.

c) $Z(*)$ - implies the presence of the character, $*$, as a terminating user delimiter for the corresponding data subfield where $*$ is an arbitrary character other than a digit. The delimiter of the last subfield of a data field may be replaced by a field terminator. The user delimiter may be a national variant character or a character from the default set as specified in clause 7.

d) Data subfields for I-type, R-type and S-type shall specify a number in a form defined by the ISO 6093 numeric representation forms NR1 (implicit point), NR2 (explicit point, unscaled) and NR3 (explicit point, unscaled) respectively. An R-type subfield may contain a fully defined S-type numeric form.

e) Data fields containing character mode bit string data (C-type) shall specify bit strings as a sequence of the characters "0" or "1" corresponding to the digits in the bit string represented.

f) Fixed-length bit strings (B-type with subfield width specification) must be specified by a format and shall not have subfield delimiters. The width of a fixed-length bit subfield shall be specified in bits. Vectors and arrays containing fixed-length bit data shall have each subfield adjacent to the preceding subfield. The last octet of a fixed-length bit subfield or a series of adjacent fixed-length bit subfields shall be filled on the right with binary zeros. The data field shall be terminated by the appropriate field terminator. The first of a series of fixed-length bit subfields shall start on an octet boundary. The format term, $X(0)$, shall be used only between bit string format terms in order to force the second bit string to start on an octet boundary.

g) Variable-length bit strings (B-type without subfield width specification) shall be specified by the following format:

Octet 0	Octets 1 to d	Octets d+1 to d+(n+7)/8	Fill
string length count	bit string length	bit string data comprising binary digits	zerofill to complete the last octet
"d"	n (digits)	user data	00...

The string length count shall be a single digit specifying the number of decimal digits in the bit string length. The bit string length shall be a sequence of decimal digits specifying the length of the bit string in bits. A variable-length bit subfield shall start on an octet boundary.

NOTE 23 - Multiple variable-length bit subfields (vectors and arrays) may be specified by the use of an appropriate format statement and variable-length bit subfields may be used in mixed data fields. Bit subfields are stored in the MSOF order.

h) Binary forms are defined by extensions to bit subfield parameters. The extensions to the field controls and format controls are specified in table 3.

Table 3 - Extensions of Bitfield Data Descriptions

Extended Binary Form	Field Controls RP 1-3	Format MSOF	Term LSOF	Precision w = octets
Integer, unsigned	51w	B1w	b1w	1,2,3,4
Integer, signed	52w	B2w	b2w	1,2,3,4
Real, fixed point	53w	B3w	b3w	4,8
Real, floating	54w	B4w	b4w	4,8
Complex, floating	55w	B5w	b5w	4,8

where

precision
field control

is the width of the data item in octets,
is the value to be placed in the associated field control field, RP 1-3
see 6.4.2.2-3

format term

is the format control for a data item,
is an appropriate permitted value of precision.

w

is a binary integer

Integer, unsigned

is a two's complement binary integer.

Integer, signed

is a signed integer of precision w/2 followed by a fractional part which is an unsigned integer of precision w/2.

Real, fixed point

is defined in IEC 559.

Real, floating point

is defined as a couplet formed of two floating point real numbers precision w in the order real part and imaginary part of the complex number.

A floating point complex number counts as a single entry in any data structure and requires a single format term. In the absence of a format descriptor, binary forms shall be stored in the same order as the binary controls if present (see 5.2.1.6 b)), or in the absence of binary controls, in the LSOF order.

NOTE 24 - The integral and fractional parts of fixed real and the real and imaginary parts of complex do not reverse their order when LSOF and MSOF are used.

i) The content of an X-type subfield is not specified and shall be ignored in interchange and is not associated with a label.

6.4.4 Order of array descriptors, labels and arrays

This clause specifies the order of numeric array descriptors, Cartesian labels and the storage order of array elements.

6.4.4.1 Order of numeric array descriptors

The general form of a numeric array descriptor shall be: d, e(1), e(2), ..., e(d)

where

d	is the dimension of the array, and
e(i)	is the extent of the i-th dimension.

6.4.4.2 Order of cartesian labels

The general form of a Cartesian label shall be: V1*V2*V3*...*Vd,

where

d	is the dimension of the array, A,
V1	is the row vector label having e(1) elements,
V2	is the column vector label having e(2) elements,
Vi	is the vector label of the i-th dimension of the array, A, having e(i) elements,

The order of expansion of the Cartesian label shall be from left to right as follows: (((V1*V2)*V3)*...*Vd).

Example: For the numeric array descriptor: 2, 3, 2, expansion of the corresponding Cartesian label:

row1!row2!row3*col1!col2 would be

row1*(col1!col2), row2*(col1!col2), row3*(col1!col2) = row1!col1, row1!col2, row2!col1, row2!col2, row3!col1, row3!col2.

6.4.4.3 Storage order of array elements

There shall be a one to one correspondence between the order of the expanded Cartesian labels and the array elements.

Example: The storage order of the above array having the elements, aij, shall be: a11, a12, a21, a22, a31, a32.

NOTE 25 - This implies that the element of the array, aij, is the element from the i-th row and the j-th column. Some programming languages express the subscripts in the opposite order.

The storage order of an array of any dimension is given by:

d

$$L(s(1), \dots, s(d)) = 1 + \sum_{k=1}^d [(s(k)-1) \times \prod_{m=k+1}^d e(m)]$$

where

A	is an array with the numeric descriptor, e(1), e(2), e(3), ..., e(d),
d	is the dimension of A,
e(i)	is the i-th extent of A,
L(s(1), ..., s(d))	is the ordinal of the (s(1), ..., s(d))-th element,
s(i)	is the i-th subscript of A (1 = first),

and

m

$$\sum_{k=1}^m x(k) \text{ is } x(1)+x(2)+\dots+x(m)$$

and

$$\prod_m x(m) \leq x(m) \times x(m+1) \times \dots \times x(d) \times x(d+1); \quad x(d+1) = 1$$

7 Use of coded character sets

This International Standard requires the use of the C0 and G0 set of the Basic Character Set throughout a DDF except for the following:

a) Subfield labels may be encoded in BCS or, when it has been invoked the UCS-2, two octet encoding form or UCS-4, the four octet form of the ISO/IEC 10646 Basic Multilingual Plane at Level 1.

NOTE 26 - Subfield labels have been restricted to level 1 in order to facilitate their use as data identifiers in processing programs.

b) External file titles, field names and user delimiters which are discussed in this clause.

c) Data fields and subfields of character data type (A-type) which are discussed in 7.1.

NOTE 27 - The exclusion of some multiple byte character sets from labels is a departure from ISO/IEC 8211-1985 but is necessary since some multiple byte sets do not include the necessary characters and others may be ambiguous. Moreover, processing escape sequences within system identifiers imposes significant overhead for direct access applications. When an ISO/IEC 10646 subset has been designated for a file or field, the delimiters, UT and FT, used in a data field are in the ISO/IEC 10646 encoding.

This International Standard provides for the use of coded character sets in data fields and subfields of the A type by the methods of ISO 2022 and ISO/IEC 10646. Default coded character set extensions may be announced for a file or separately for each field as described in this clause. Subclause 7.1 specifies the announcement of the method of choice and requirements which are common to both methods. Subclause 7.2 specifies the use of ISO 2022 and 7.3 specifies the use of ISO/IEC 10646. Both code sets may be specified as filewise and fieldwise defaults or be used as in-line escape sequences. The use of appropriate escape sequences will allow the inter-mixture of the code sets in the same file or field.

7.1 Announcement of coded character set extension

This field, DDR Leader RP 7, shall specify if coded character sets other than the G0 set of BCS are used in the file. The values of this field shall have the following meanings:

SPACE	Only the G0 set of BCS is used and there are no in-line escape sequences.
"E"	The BCS is the default character set and in-line ISO 2022 escape sequences may be used.
"h"	Collections 1 and 2 of the ISO/IEC 10646 coded character set form the default character set and there are no in-line Identification of Feature control functions or CSI sequences or ESC sequences are used.
"H"	Collections 1 and 2 of the ISO/IEC 10646 coded character set form the default character set and in-line Identification of Feature control functions or CSI sequences or ESC sequences may be used

NOTE 28 - The meaning of the above controls is further modified by the contents of DDR Leader RP 17 - 19 and the DDR Field Controls RP 0-2 (level 1) or RP 6-8 (levels 2 and 3) (see 7.2 and 7.3) which specify filewise and fieldwise default character sets.

7.1.1 Scope of active character sets

The scope of an active character set, i.e., one which has been designated and invoked implicitly or explicitly, shall start at the beginning of and terminate at the end of an external file title, a field name or a user delimiter or a subfield of character data type (A-type).

7.1.2 Length of fields and subfields

The length of a field or subfield shall be the octet count including any control characters, escape sequences and multiple octet or octet character encodings.

When the use of extended character sets requires the presence of escape sequences, shiftin, shiftout or other control characters, the subfield width shall be indicated by delimiters and fixed width formats shall not be used.

7.1.3 Use of multiple octet character sets

This use is subject to the following conditions:

- a) The field names shall be written in the designated default set. Other escape sequences may occur in the field names and the scope of the invocation shall terminate at the end of the subfield excluding the terminator.
- b) The delimiters, "!" (EXCLAMATION MARK), "*" (ASTERISK) and "\\" (REVERSE SOLIDUS) of the vector and Cartesian labels shall be written in the BCS or, when invoked, ISO/IEC 10646 BMP at level 1, UCS-2 or UCS-4.
- c) If multiple octet delimiters are used as the user delimiter, they shall be invoked and their scope shall terminate within the parentheses of the applicable format control.
- d) The octet counts of a variable-length bit subfield shall be coded as single octets in the BCS.

7.2 ISO 2022 coded character set extension

This International Standard permits the use of ISO 2022 for extended coded character sets in data fields, user delimiters, field names, external file titles and labels. The use of coded character set extensions as specified in ISO 2022 as default character sets in data fields, field names and for user delimiters shall be limited to sets having three or four octet escape sequences associated with the announcing sequences as specified in ISO 2022. Within data fields, national variant sets and any C0, C1, G0, G1, G2 and G3 character sets may be used in the manner described by ISO 2022 without restriction to length of escape sequences.

NOTE 29 - National variant character sets are designated and invoked by use of their registered escape sequences in the same manner as other extended character sets. ISO/IEC 10646 sets may be designated from within an ISO 2022 character set.

7.2.1 Designation of ISO 2022 coded character sets

An extended character set shall be designated by the presence of its truncated escape sequence in the DDR and shall be invoked by default upon entry into the associated data field at which time the G0 set shall be invoked into columns 02-07 (in the 7-bit environment; 2-7) and the G1 set shall be invoked into columns 10-15. Other invocations shall require the use of an appropriate shift control character. If a G0 set has not been designated, the BCS is the G0 set by default. The scope of any invocation shall terminate at the end of each data field.

7.2.1.1 Use in the 7-bit environment

When an extended G1, G2 or G3 set has been specified as a default character set in a 7-bit environment, the field name, file title, subfield label and user delimiter fields shall begin with the G0 set unless an SO control or other shift control character is present to invoke the G1, G2 or G3 set.

7.2.2 Designation of default code set for file

A default character set shall be designated for a file by placing a SPACE or an "E" in DDR Leader RP 7 and the truncated escape sequence in DDR Leader RP 17-19.

The truncated escape sequence is the last (n-1) characters of the escape sequence used to specify the extended character set, where n is less than or equal to 4. The sequence shall be left justified and, if necessary, filled on the right with SPACES. If there is no extension specified for a field, these three characters shall be SPACES.

7.2.3 Designation of default code sets for fields

A default character set having an n-character escape sequence for each field shall be designated by:

- a) placing a SPACE or an "E" in DDR Leader RP 7,
- b) placing (2/0)(2/1)(2/0) in DDR Leader RP 17-19,
- c) setting the value in the Field Control Length field, DDR Leader RP 10-11, to "03" for a level 1 DDF and "09" for a level 2 or 3 DDF.
- d) placing the truncated escape sequence in the Field Controls RP 0-2 (level 1) or RP 6-8 (levels 2 and 3) of the appropriate DDR field.

7.2.4 ISO 2022 announcer sequence field (tag 0...3)

The ISO 2022 announcer sequences (see ISO 2022 clause 9) for the code extension services used may be supplied by placing the complete list of announcers in the DDR as the contents of the data descriptive field having the tag 0...3. The list of announcers shall be in one of the following formats:

- a) Announcers for the entire file:

The list of announcers shall be the complete three octet sequences concatenated together without further demarcation. The field shall be terminated by a field terminator.

- b) Announcer for each field:

The list of announcers shall comprise a list of field tags, each field tag followed immediately by the applicable list of announcers terminated by a unit separator. The last announcer shall be terminated by a field terminator.

In the absence of this field or in the absence of a field tag from the contents of this field, the announcer sequence is ESC (2/0) (4/4) by default.

NOTE 30 - These two cases can be resolved by the presence of the ESC at the start of case a).

7.3 ISO/IEC 10646 coded character sets

This International Standard permits the use of ISO/IEC 10646 for extended coded character sets in data fields, user delimiters, field names, external file titles and labels. The default state for ISO/IEC 10646 coded character sets shall be:

- a) UCS-2, the two octet form,
- b) Collections 1 and 2,
- c) the C0 and C1 sets from ISO/IEC 6429, and
- d) Level 1, no combining characters.

Other UCS collections, including levels 2 and 3, may be designated for the entire file or for each field as specified in this clause. The collections of ISO/IEC 10646 Annex A shall be specified by their identification numbers using BCS digits which shall be right-justified with left-zerofill.

NOTE 31 - The user is referred to ISO/IEC 10646 for a complete description of ISO/IEC 10646 character encoding.

The use of the ISO/IEC 10646 multi-octet encoding shall be subject to the specifications of 7.1.3.

7.3.1 Announcement of filewise default character set

The use of a filewise default UCS collection shall be announced by placing the "h" or "H" character in DDR Leader RP 7 and its left-adjusted, zero-filled, ISO/IEC 10646 collection identification in DDR Leader RP 17-19.

7.3.2 Announcement of fieldwise default character set

The use of a fieldwise default UCS collection set shall be announced by:

- a) placing an "h" or "H" character in DDR Leader RP 7,
- b) placing three "H" characters in DDR RP Leader 17-19,
- c) setting the value in the Field Control Length field, DDR Leader RP 10-11, to "03" for a level 1 DDF and "09" for a level 2 or 3 DDF,
- d) placing its ISO/IEC 10646 collection identification in the Field Controls RP 0-2 (level 1) or 6-8 (levels 2 and 3) of the appropriate DDR field.

NOTE 32 - See ISO/IEC 10646 subclause 17.4 and Annex A for collection identifiers.

The C1 control functions may be used within the data strings (see 7.1).

7.3.3 ISO/IEC 10646 feature identifier field (tag 0...3)

Any additional ISO/IEC 10646 features used in a file (see ISO/IEC 10646 clause 17) may be identified by placing the complete list of the additional feature identifiers in the DDR as the contents of the data descriptive field having the tag 0...3. These additional features shall be the default state of the file or a field and any collections specified shall be in addition to the specification of the data field description. The list of identifiers shall be in one of the following formats:

a) Feature Identifiers for the entire file:

The list of feature identifier sequences shall be the complete ISO/IEC 10646 sequences concatenated together without further demarcation. The field shall be terminated by a field terminator.

b) Feature Identifiers for each field:

The list of feature identifier sequences shall comprise a list of field tags, each field tag followed immediately by the applicable concatenated list of feature identifier sequences terminated by a unit separator. The last identifier shall be terminated by a field terminator.

NOTE 33 - These two cases can be resolved by the presence of the ESC or CSI character at the start of case a).

IECNORM.COM: Click to view the full PDF of ISO/IEC 8211:1994

Annex A

(normative)

ASN.1 and FTAM Registrations

This annex contains definitions of ISO/IEC 8211 document types for storage, and for transfer and access by FTAM. Registration of these document type definitions is governed by the procedures of ISO/IEC 9834-2.

A.1 Abstract syntax identifier

The abstract syntax identifier for this International Standard shall be {iso standard 8211 abstract-syntax(0)} with the corresponding numerical identifier, {1 0 8211 0}.

A.2 Transfer syntax identifier

The transfer syntax identifier for this International Standard shall be {iso standard 8211 transfer-syntax(1)} with the corresponding numerical identifier, {1 0 8211 1}.

A.3 FTAM document type definitions

This section contains the FTAM document type definitions for ISO/IEC 8211 files.

A.3.1 ISO DDF unstructured document type

A.3.1.1 Entry number: DDF-1

A.3.1.2 Information objects

The information objects of the unstructured document type are specified in table A.1.

Table A.1 Information Objects in the Unstructured Text Document Type

document type name	{iso standard 8211 document-type(2) unstructured(0)} "ISO DDF unstructured"
abstract syntax names a) asname1	{iso standard 8211 abstract-syntax(0)} "DDF abstract syntax"
transfer syntax names	{iso standard 8211 transfer-syntax(1)} "DDF transfer syntax"
parameter syntax	PARAMETERS ::= null
file model	{iso standard 8571 file-model(3) hierarchical(1)} "FTAM hierarchical file model"
constraint set	{iso standard 8571 constraint-set(4) unstructured(1)} "FTAM unstructured constraint set"
file contents	Datatype1 ::= OCTET STRING

A.3.1.3 Scope and field of application

This document type defines the contents of a file or part of a file, for storage or transfer by File Transfer, Access and Management (FTAM) - ISO 8571, as specified by this International Standard.

A.3.1.4 References

ISO 8571, *Information Processing Systems - Open Systems Interconnection - File Transfer, Access and Management*

A.3.1.5 Definitions

This definition makes use of the terms data element, data unit and file access data unit as defined in ISO 8571-1, and the terms Data Records, unused media space and padding as defined in this International Standard.

A.3.1.6 Abbreviations

ASE	Application Service Element
ASN.1	Abstract Syntax Notation One
DDF	Data Descriptive File
FTAM	File Transfer, Access and Management
P-data	Presentation Data

A.3.1.7 Document semantics

The document consists of one file access unit, which consists only of zero, one or more octet strings. The order of these elements is significant. The semantics of the octet strings is specified in this International Standard.

The document structure takes the form allowed by the FTAM hierarchical file model as constrained by the unstructured constraint set as defined in ISO 8571-2 (see table A1).

There are no size or length limitations imposed by this definition except as prescribed by this International Standard and ISO 8571-2 FTAM-3.

A.3.1.8 Abstract syntactic structure

The abstract syntactic structure of the document is a series of ASN.1 data types of the type OCTET STRING as specified in ISO/IEC 8824, whose semantics are defined in this International Standard.

A.3.1.9 Definition of transfer

A.3.1.9.1 Datatype definition

The file consists of zero or more values of Datatype1 defined in table A1.

A.3.1.9.2 Presentation data values

The document is transferred as a series of presentation data values. Each presentation data value shall consist of one value of the ASN.1 data type "Datatype1", carrying one of the strings of the document.

Boundaries between P-data primitives are chosen locally by the sending entity at the time of transmission and carry no semantics of the document type. Receivers which support this document type shall accept a document with any permitted transfer options.

A.3.1.9.3 Sequence of presentation data values

The sequence of presentation data values is the same as the sequence of the octet strings within the Data Unit of the file.

A.3.1.10 Transfer syntax

An implementation supporting these document types shall support the transfer syntax generation rules named in table A1 for all presentation data values transferred. Implementations may optionally support other transfer syntaxes.

A.3.1.11 ASE specific specifications

A.3.1.11.1 ISO 8571 - FTAM

This document type is a refinement of FTAM-3. Any implementation capable of supporting FTAM-3 can also transport DDF-1.

A.3.1.11.2 ISO/IEC 8211 implementation support

The following clauses apply to any implementation support of DDF-1.

A.3.1.11.2.1 The EXTEND operation

The FTAM EXTEND operation shall consist of appending conforming Data Records immediately after the last existent Data Record and padding any unused media space with CIRCUMFLEX characters. The semantics of the extend operation are defined in this International Standard.

A.3.1.11.2.2 The REPLACE operation

When the replace operation is applied to the root FADU of a "DDF-1" document, the transferred material shall be any "DDF-1" document.

A.3.1.11.2.3 Relaxations

Any document requested by a DDF Access System using an "FTAM-3" document type which is a relaxation of the document type under which it was stored shall be supplied as the requested "FTAM-3" document type.

A.3.2 ISO DDF Structured document type

A.3.2.1 Entry number: DDF-2

A.3.2.2 Information objects

The information objects of the structured document type are specified in table A.2.

Table A.2 Information Objects in the Structured Text Document Type

document type name	{iso standard 8211 document-type(2) structured(1)} "ISO DDF structured"
abstract syntax names a) name of asname1 b) name of asname2	{iso standard 8211 abstract-syntax(0)} "DDF abstract syntax" {iso standard 8751 abstract-syntax(2) ftam-fadu(2)} "FTAM FADU"
transfer syntax names	{iso standard 8211 transfer-syntax(1)} "DDF transfer syntax"
parameter syntax	PARAMETERS ::= null
file model	{iso standard 8571 file-model(3) hierarchical(1)} "FTAM hierarchical file model"
constraint set	{iso standard 8571 constraint-set(4) ordered hierarchical(5)} "FTAM ordered hierarchical constraint set"
file contents	Datatype1 ::= OCTET STRING Datatype2 ::= CHOICE{ Node-Descriptor-Data-Element Enter-Subtree-Data-Element Exit-Subtree-Data-Element}

A.3.2.3 Scope and field of application

These document types define the contents of a file or part of a file for storage, for access and transfer by File Transfer Access and Management (FTAM) - ISO 8571, as specified in this International Standard.

A.3.2.4 References

ISO 8571, *Information processing systems - Open Systems Interconnection - File Transfer, Access and Management*.

A.3.2.5 Definitions

This definition makes use of the terms data element, data unit and file access data unit as defined in ISO 8571-1, and the terms Data Descriptive Record, Data Record, Field and Field Tag as defined in this International Standard.

A.3.2.6 Abbreviations

ASE	Application Service Element
DDF	Data Descriptive File
DDR	Data Descriptive Record
FADU	File Access Data Unit
FTAM	File Transfer, Access, and Management
HA	Hierarchical All Data Units Access Context
P-data	Presentation Data
UA	Unstructured All Data Units Access Context
US	Unstructured Single Unit Access Context

A.3.2.7 Document semantics

The document consists of file access data units, which consist only of zero, one or more octet strings. The order of these elements is significant. The semantics of the octet strings is specified in this International Standard.

The document structure takes the form allowed by the FTAM hierarchical file model as constrained by the Ordered Hierarchical constraint set, as defined in ISO 8571-2 (see table A.2) and further constrained to a depth of 2. The root node has an associated data unit which contains the DDR as defined in this International Standard. There are nodes at level one, each of which identifies a Data Record as defined in this International Standard. There are nodes at level two, the data unit of each contains a field and its size as defined in this International Standard.

The significance of the Node Names is as follows:

Level	Node Name	Node Contents
0	None	
1	Record-index	INTEGER indicating the Record Index
2	Field-index	CHOICE {field-index INTEGER, field-tag-instance SEQUENCE { field tag VisibleString, instance INTEGER}}

The data unit contents are as follows:

- level 0 - the access contexts available are:
 - HA - complete DDF-2 document with structure
 - US - only the root node data element, i.e. the DDR
 - UA - the whole file relaxed to "DDF-1" document type
- level 1 - the access context available is HA - the complete record contents
- level 2 - the access context available is HA - the field tag, field size and contents

There are no size or length limitations imposed by this definition, except as prescribed in this International Standard.

A.3.2.8 Abstract syntactic structure

The abstract syntactic structure of the document is a series of ASN.1 data types of the type OCTET STRING as specified in ISO/IEC 8824, whose semantics are defined in this International Standard.

A.3.2.9 Definition of transfer

A.3.2.9.1 Datatype definition

The file consists of zero or more values of either Datatype1 defined in table A2 or Datatype 2 as defined in table A2, the ASN.1 data type as declared as "Data-Element" in the ASN.1 module ISO 8571-FADU.

A.3.2.9.2 Presentation data values

The document is transferred as a series of presentation data values. Each presentation data value shall consist of one value of the ASN.1 data type "Datatype1", carrying one of the strings from the document or one value of the ASN.1 data type "Datatype 2".

Boundaries between P-data primitives are chosen locally by the sending entity at the time of transmission, and carry no semantics of the document type. Receivers which support this document type shall accept a document with any of the permitted transfer options.

A.3.2.9.3 Sequence of presentation data values

The sequence of presentation data values is the same as the sequence of octet strings within the Data Unit in the file.

A.3.2.10 Transfer syntax

An implementation supporting these document types shall support the transfer syntax generation rules named in table A2 for all presentation data values transferred. Implementations may optionally support other transfer syntaxes.

A.3.2.11 ASE specific specifications**A.3.2.11.1 ISO 8571 - FTAM**

This document type may be simplified to the document type DDF-1. The resultant document type contains the same sequence of data values as would result from accessing the structured DDF file in access context UA. That is, only the presentation data values in the abstract syntax name "asname1" are present.

A.3.2.11.2 ISO/IEC 8211 implementation support

The following clauses apply to any DDF implementation claiming support of DDF-2.

A.3.2.11.2.1 The EXTEND operation

The FTAM EXTEND operation shall consist of appending conforming Data Records immediately after the last existent Data Record and padding any unused media space with CIRCUMFLEX characters. The semantics of the extend operation are defined in this International Standard.

A.3.2.11.2.2 The REPLACE operation

When the REPLACE operation is applied to the root FADU of a "DDF-2" document, the transferred material shall be any "DDF-2" document.

A.3.2.11.2.3 Relaxations

Any document requested by a DDF Access System using a "DDF-1" document type which is a relaxation of the document type under which it was stored shall be supplied as the requested "DDF-1" document type.

IECNORM.COM: Click to view the full PDF of ISO/IEC 8211:1994

Annex B (informative)

ISO/IEC 8211 Application Specifications

This International Standard specifies a method for the description of user data fields contained in interchange files and a general method for combining user data fields into user data records. Within the specified methods a user must specify the details for a specific application. An interchange file set may contain several files and each file may have its own requirements for record content and order as well as the content and order of fields within records. The user is responsible for this design and must prepare, validate and maintain the specification. This International Standard specifies the occurrence of the data description as it appears in the octet string of the DDR which is intended for machine processing and not for human readability. This International Standard anticipates the preparation of DDF files by automated methods and their preparation by an editor is nearly impossible.

This International Standard does not specify any requirements for the semantics of user data. It does specify methods for the unique identification of each data item and user semantics can be associated with this identifier.

This annex describes a manner of supplying the data description specifications for an interchange file set in a manner which is human readable, editable and convertible by computer to a conforming DDR. The file also may be subjected to the same validation testing as a DDR or be transformed into a draft specification document.

The file described in this annex is not a part of an interchange file set.

B.1 Specification of ISO/IEC 8211 Exchange File Sets

An ISO/IEC 8211 exchange set is usually a large data structure which must be specified in great detail. The following manner of specification is intended to enable its description in a concise yet detailed manner.

The structural model for an ISO/IEC 8211 exchange set is an ordered rooted tree. The general notation for the model is:

```
<Tree root>
  |
  |-<r>-<subtree>
  |-<r>-<subtree>
  |
  - ...
```

where `<tree root>` is the root of the tree structure

<r> is the repetition factor of the subtree, <subtree>.

In the usual manner of trees, each subtree type may comprise the root of further subtrees. The complete specification of an exchange set comprises the following generic subtrees:

```
<exchange set>
  |-<r>-<file type>
  |  |
  .  |-<r>-<record type>|<file type>
  .  |  |
  .  .  |-<r>-<field type>|<record type>
  .  .  |  |
  .  .  .  |-<r>-<field type> <field description>
  .  .  .
```

where

<exchange set> is the exchange set name

<r> is a specified repetition factor for a subtree.

- = null meaning $\langle r \rangle = 1$
- = integer, meaning a specific repetition factor
- = R, meaning indefinite repetition

<file type>, <record type> and <field type> levels may have an instance of the same type as a subtree (i.e. a file can be the subtree of a file, etc.)

```
<file type> ::= File: external file title (see 6.2.1.2).
<record type> ::= Record: <record name>
<field type> ::= <tag> "(" <structure> ")" <order> " - " <field name>
      <tag> ::= an ISO/IEC 8211 field tag (which associates this field uniquely to its data description)
<structure> ::= <extents> | <extents> "\\" <structure>
<extents> ::= <n> | <m*n> | <*n> | <i*|*...>
```

where

<code><n></code>	describes an n-tuple (with n = integer)
<code><m*n></code>	describes a 2-D array of m rows and n columns
<code><*>n</code>	describes a repeating 2-D table with n columns
<code><i>*>...</code>	describes a multi-D array with extents i, j, ...

Note that the intent of `<structure>` is to provide the user with a concise description of the repetition pattern of the subfields within the field.

`<order>` ::= "O" | "O:" <tag>, a succinct statement of any intra- or inter-field ordering requirements.

where \odot implies the order of the subfields is significant.

O: <tag>,... implies the order of the subfields is correlated with the order of the subfields in the field bearing the tag(s). <tag>,... .

<field name> ::= the ISO/IEC 8211 field name corresponding to **<tag>**

<field description> ::= the ISO/IEC 8211 data description for a field. The details of field description are given with B.2

The presentation diagram for ordered rooted trees is:

```
<tree root>
  |
  |-<r>-<subtree 1>
  |
  *-<r>-<subtree 2>
  |
  *-<r>-<subtree 3>
  |
  |----- where * implies <subtree 2> or <subtree 3> but not both
```

~~Note 34 - NOTA BENE:~~ In these representations, the preorder traversal sequence rule is: top down, right hand branch first. The parent of any subtree is readily apparent and the parent tags for fields must coincide with the field description. The traversal of the tree encounters the repetition factor, perhaps the default of one, of a subtree as the subtree is entered. Further repetition patterns may be indicated in the field descriptions and are summarized in the above `<structure>` and `<order>` constructs.

The above tree structures for each file define the order and structure of the data descriptive records (DDRs) and the order and structure of the data records (DRs). Vertical and horizontal lines may be extended and spaces may be introduced into the text for readability. To improve the legibility of the specifications for large exchanges, the description may be compartmentalized into subtrees for reasons of clarity. The root of each subtree identifies its nodal position in its parent tree. The documentation provided by this section may be placed as comments in the DFD file described in clause B.2 to yield a complete documentation of an exchange set.

NOTE 35 - Due to limitations of page space, except for the most trivial cases the data field descriptions will be disjoint from the tree structure and are related to the tree by the field tag and, optionally, the field name.

B.2 ISO/IEC 8211 data field description

This annex presents a method for the representation of ISO/IEC 8211 data description which is logically equivalent to the DDR data description but which is human-readable. The data field description (DFD) form is easily prepared and maintained on a simple editor and can automatically be converted to the DDR form for export or verification. Use of this form will greatly reduce the effort of ISO/IEC 8211 file design.

The method comprises six constructs as follows:

- a) File identification
- b) Global default specification
- c) DDR leader specification
- d) One or more instances of DDR data field descriptions
- e) An INCLUDE construct
- f) A LOCAL construct

This methodology provides an alternative statement of an ISO/IEC 8211 data description, which when converted into an ISO/IEC 8211 DDR may produce a data description which is non-conforming. In this event, the specifications of clauses 5 through 7 shall take precedence.

This International Standard does not provide specifications for processing a DFD into a DDR.

NOTE 36 - A user may find it advantageous to develop the specifications for an exchange file set as a composite file, which after its completion is disaggregated into the component files of the exchange set.

B.2.1 General specifications

The DFD is intended as a free form human-readable, computer-parsable format. The user is encouraged to use formatting (layout of the definitions) to enhance readability. The specifications of this clause contribute to readable and parsable data descriptions.

B.2.1.1 End of line

End of line is a system specific sentinel indicating the end of a displayable line. Multiple occurrences of end of line shall be logically equivalent to a single occurrence. With the exception of the FOR and REPEAT constructs, and continued quoted strings, each construct shall begin on a new line and end on the same line.

B.2.1.2 White space

White space shall be any positive number of SPACE or TAB characters. White space shall occur between adjacent terms and values in a construct.

Within a Cartesian label construct, white space also includes end of line.

B.2.1.3 Comments

Comments shall be introduced by a hyphen and shall be terminated by end of line. A comment may occur anywhere except within a quoted string.

B.2.1.4 Quoted strings

Quoted strings shall be used to represent tags, label names, field names and other textual quantities. Quoted strings shall be delimited by the single quote character. A zero length quoted string shall be represented by two adjacent single quotes. An end of line shall not occur in a quoted string. If the character "single quote" is required within a quoted string, it shall be represented by two adjacent single quotes, e.g., 'Here's one'.

The continuation of quoted strings to the next line is accomplished by closing the first segment of the string with a single quote, and placing the appended string on the next line, optionally preceded by white space. For instance:

'This is a string which is'
'continued on another line' - this comment does not affect anything

B.2.1.5 Notation

Generic terms and values are represented by a brief descriptive mnemonic within "<" and ">". Within an extent specification, adjacent numeric values are separated by commas. The ellipsis, "... " is used to signify repetition of the preceding element. The optional presence of a construct is expressed by enclosing it in square brackets, i.e., "[...]".

B.2.1.6 The INCLUDE construct

The INCLUDE construct has the following form:

INCLUDE '<system-specific-file-specification>'

The contents of the specified file shall be logically transferred into the DFD specification file at the location of the INCLUDE construct.

NOTE 37 - The effect of the INCLUDE construct is equivalent to textually substituting the construct with the contents of the specified file.

An included file may not contain an INCLUDE construct.

B.2.1.7 Order of Constructs

The order of constructs shall be:

a) File identification	- required
b) DDR leader specifications	- tag length required
c) Global default specifications	- interspersed as needed
d) Field Specifications	- may be repeated
* Field tag	- required
* Parent tag	
* Printable graphics	
* Escape	
* Array descriptor	
* Format controls	
* THEN	
e) LOCAL constructs	- unspecified

A construct, except for the INCLUDE construct, shall not be imbedded within any other construct.

The order of the special fields 0...0 through 0...9, if present, is specified in 6.2.7 and the order of fields in a level 3 file are specified in 6.2.1.3 and 6.2.6.

B.2.2 File identification

This information provides human-readable identification of the interchange system being defined. These values are not to be converted into DDR data description fields.

File identification includes the following forms:

<term>	<value>
TITLE	'<file-title>'
AUTHOR	'<file-author>'
DATE	'<file-date>'

NOTE 38 - This file title is not the external file title specified in the DDR.

B.2.3 DDR leader specifications

This construct supplies the values for the DDR leader fields which contain global data descriptive information applicable to the entire file. The LEADER construct shall reset all unspecified values to their original default values including the global defaults.

The canonical form of the DDR leader specification is:

```
LEADER
  <term>  <value>
  ...
END LEADER
```

where <term> and <value> are one or more entries from the following table:

<term>	<value>	RP	Default	Reference
TAG LENGTH	1-7	23	--	5.2.1.5.4
LEVEL	1 2 3	5	2	6.1.1
VERSION	0 1	8	1	5.2.1.3
FORM	'SP' 'B' 'b'	4	SPACE	5.2.1.6
INLINE EXTENSION CODE	'SP' 'E' 'H' 'h'	7	SPACE	6.1.2
APPLICATION INDICATOR	'SP' <any>'	9	SPACE	6.1.3
ESCAPE	'SPs' '010' <esc>'	17-19	SPACES	6.1.5

where

"<any>" is a user selected character,
 "<esc>" is a truncated ISO/IEC 8211 escape sequence or an ISO/IEC 10646 collection number, and
 "SP" for FORM signifies the character form of the leader.

Example: The escape sequence: ESC 2/1 2/8 2/6 when truncated is encoded as '!(&.

The semantics of the values are specified in the referenced clause. The TAG LENGTH which does not specify a default is required. The other constructs are required only to change the default.

NOTE 39 - ISO 2022 escape sequences, often interpreted as unsigned binary integers, are members of a graphics character set easily represented by most editors and displayed on many devices. ISO/IEC 10646 code set collections are designated by integers in the range of 0 to 999. The octets of ISO 2022 truncated escape sequences and collection numbers may be represented by a quoted string or decimal number respectively.

B.2.4 Global default specification

The following constructs provide default values for the Field Controls field. They shall be applied from their point of definition until their redefinition or the end of file:

<term>	<value>	default	clause
DEFAULT PARENT	'<tag>'	'0...1'	6.2.1.3, B.2.5
DEFAULT PRINTABLE GRAPHICS	'<ab>'	'&'	6.4.2.4
DEFAULT ESCAPE	'<esc>'	SPs	6.4.2.5, B.2.5

where

<tag> is a Field Tag value
 <ab> are the Printable Graphics characters
 <esc> is a truncated escape sequence or collection number, see B.2.3.

B.2.5 Data field specifications

These constructs supply the information (see 6.3 and 6.4) necessary to form a DDR data description field. The constructs are presented as a canonical form followed by several special cases of the canonical form, which are applicable to simple field structures and formats. Field descriptions shall be supplied in the order they are to occur in the DDR.

The canonical form of the data field description is given below:

FIELD '<tag>' '<field_name>' (see 5.2.2.1, 6.3, 6.4.3.1)

The DDR field name is optional and may be omitted.

NOTE 40 - For the '0...0' tag, the field name shall be used to specify a default external file title in the DDR file. The only additional field information that may be required for this field is ESCAPE.

PARENT '<tag>' Default = DEFAULT PARENT

NOTE 41 - The parent tag information is used to construct the DDR list of tag pairs.

PRINTABLE GRAPHICS '<ab>' Default = DEFAULT PRINTABLE GRAPHICS

ESCAPE '<esc>' see B.2.3 Default = DEFAULT ESCAPE

NOTE 42 - The presence of the preceding three constructs is optional. When one is omitted, the current global default shall take effect.

An array descriptor construct comprising one or more of the following:

1) A structure code:

STRUCTURE CODE <d> (see 6.4.2)

where <d> is the field structure code and the default is "0".

NOTE 43 - This construct is used only when the structure code can not be determined from a numeric descriptor or a Cartesian label.

2) A numeric descriptor:

NUMERIC DESCRIPTOR <ex1>,<ex2>,... (see 6.4.3.2.1)

where <ex1>,<ex2>,... are the extents of the array.

NOTE 44 - This construct is used only when the structure code can not be determined from a Cartesian label. The extent information does not include the dimension of the array.

3) A Cartesian label:

FOR 'row1' 'row2' ... BY 'col1' 'col2' ... BY ... BY 'page1' 'page2' ... (see 6.4.3.2.4)

NOTE 45 - The 'BY's within the Cartesian label construct are equivalent to the ""'s within the DDR Cartesian label. The whitespaces between the subfield labels are equivalent to the "!"s of the DDR vector labels.

The REPEAT Construct:

The following construct specifies the DDR hierarchical format controls:

REPEAT <repeat-group> (see 6.4.3.3)
<m> <fmterm>

...
REPEAT <repeat-group>
<m> <fmterm>
...

END REPEAT
<m> <fmterm>
...

END REPEAT

where

- <repeat-group> is
 - a) a repetition factor, or
 - b) "TO END", or
 - c) "BIT FIELD"

<m> is a repetition factor and <fmterm> is an elementary format term as described in 6.4.3.3.

There shall be only one <m> <fterm> pair per display line and when <m> is omitted the default value shall be one.

REPEAT BIT FIELD

(see 6.4.3.3 a))

This construct provides for the repetition of formats used with bit fields and shall introduce the supplemental paired parentheses into the format control string. The matching END REPEAT must be immediately before the END FIELD.

REPEAT TO END

(see 6.4.3.3 a))

This construct provides for the repetition of a set of terminal format terms and inserts the appropriate paired parentheses at its location in the format description and at the end of the format. The matching END REPEAT must be immediately before the END FIELD.

NOTE 46 - The format generated is used to set the data type code (6.4.2.2) and under some circumstances an implementation may compress a format and eliminate unnecessary parentheses and terms. When format controls are optional (6.4.3.3) they may be omitted.

THEN

(see 6.4.3.2.5)

NOTE 47 - The 'THEN' construct is equivalent to the "\\" characters in the DDR concatenated structure description, and if present shall be followed by appropriate additional field constructs, i.e., an array descriptor and a format control.

END FIELD

NOTE 48 - The 'END FIELD' construct terminates the field description.

B.2.6 Special forms of field constructs

The following special forms shall be recognized for fields in which there is a correspondence between the array elements of the last vector label of the Cartesian label and the repeating format. They may be used in combination when appropriate.

B.2.6.1 Null first vector label

A repeating row table with a null first row vector label (see 6.4.3.2.4) takes the form:

FOR BY 'col1' 'col2' ... BY ... BY 'page1' 'page2' ...

B.2.6.2 Correspondence of format and last vector label

The following form may be used for constructs of 2-D, 1-D and 0-D structures. It may also be used for 2-D structures with a null first vector label.

FOR 'row1' 'row2' ... BY

'col1' <fmterm1>
'col2' <fmterm2>
... ...

The following encoding rules shall apply:

- 1) The FOR shall always be present and shall not occur on the line with the first label-format term.
- 2) There shall be one pair of label-format term values per display line.
- 3) A null subfield label is encoded as a null string.
- 4) A null row vector label shall be encoded by omitting the row labels and including the "BY".
- 5) An n-tuple shall be encoded by omitting the row labels and the "BY".

B.2.6.3 Special DDR tagged fields

The contents of the special DDR tagged fields, 0...2 and 0...3, (see 6.2.3-4) shall be provided by one of the special forms:

FIELD '0...2'	CONTENT	'<special_field_contents>'	see 6.2.3
END FIELD			

FIELD '0...3'	ESCAPE	'<control sequence>'	see 6.2.4
END FIELD			

where 'control sequence' may be an ISO 2022 announcer sequence or an ISO/IEC 10646 identification of features as specified by the appropriate standard and encoded as quoted strings using the mnemonics of ISO/IEC 6429 to represent control characters, e.g., 01/11 as 'ESC' and 09/11 as 'CSI'.

B.2.7 Special constructs

This construct provides for the use of system dependent constructs in a manner which will not compromise the standard data description constructs of this Annex. Any local construct shall begin with the text "LOCAL " and shall not be used to replace any of the specified functions of this Annex. A system may ignore any local construct.

NOTE 49 - Examples of this construct to pass local processing information associated with a file to the export software might be:

LOCAL DROPPED LEADER d
LOCAL INPUT MODE 'a'.

B.3 Examples of exchange set specification

The following is an example of the data description methodology of this annex and explanatory comments are included in the text.

TITLE 'Exemplar: ISO/IEC 8211 Revised Data Field Description'
AUTHOR 'A. A. Brooks'
DATE '1992-06-20'

- The following are the specifications for the DR records:
- File: DDFDFD DEMO FILE
- |-R-- Record: ISO/IEC 8211 data exemplar
- Record: ISO/IEC 8211 data exemplar
- 01 (1) - RECID
- |-R-- TX (1) - TEXT
- |-R-- E0 (1) - CHARACTER
- |
- |-R-- V0 (n) - VECTOR/CHARACTER
- |-R-- Vx (n) - Vector/CHARACTER
- | |-R-- V1 (6) VECTOR/IMPLICIT POINT
- | |-R-- V6 (6) VECTOR/MIXED DATA TYPES
- |
- |-R-- A0 (5*2) - CHARACTER ARRAY
- |-R-- A1 (3*2) ARRAY/IMPLICIT POINT
- |-R-- A6 (*2) ARRAY/MIXED DATA TYPES
- |-R-- A7 (3*2) ARRAY/NUMERIC ARRAY DESCRIPTOR
- |-R-- A8 () ARRAY/NUMERIC ARRAY DESC IN DR
- |-R-- A9 (2\|2*3) CONCATENATED VECTOR\ARRAY

-The data description of this example is similar in part to that described in the example of annex E.5. Several default values are explicitly declared for illustration and so are indicated by a comment. A few parameters, not used by this example are illustrated by annotated comments.

LEADER		
TAG LENGTH	2	- required
LEVEL	3	
VERSION	1	- same as default
FORM	'b'	
INLINE EXTENSION CODE	''	- same as default
APPLICATION INDICATOR	''	- same as default
ESCAPE	' '	- same as default
END LEADER		

DEFAULT PARENT '01' - same as default
 DEFAULT PRINTABLE GRAPHICS ';' - same as default
 - DEFAULT ESCAPE ' ' - same as default but not applicable to this file

- The following field is the external file title field and provides a default external file title
 FIELD '00' 'DDDFDF DEMO FILE - LEVEL 3'
 END FIELD

- The following field is the ISO/IEC 8211 record identifier field
 FIELD '01' 'RECID' - field tag and field name
 FOR
 " A - ISO/IEC 8211 record identification
 END FIELD

- The following field is the DDR user application field
 FIELD '02'
 CONTENT 'ISO/IEC 8211 - example'
 '(example of string continuation)' - this DDR field has no field name
 - defines field contents
 END FIELD

- The remaining fields are user data fields
 FIELD 'TX' 'TEXT'
 PARENT '01'
 FOR
 " A - elementary field without a label
 END FIELD

FIELD 'E0' 'CHARACTER'
 PARENT '01'
 FOR
 'redundant' A - elementary field with redundant label
 END FIELD

FIELD 'V0' 'VECTOR/CHARACTER'
 PARENT '01'
 STRUCTURE CODE 1 - structure code in lieu of labels
 REPEAT
 A() - user delimiter, SPACE
 END REPEAT
 END FIELD

FIELD 'Vx' 'Vector/CHARACTER'
 PARENT '01'
 STRUCTURE CODE 1
 REPEAT 2 - nested format groups
 REPEAT 3
 2 A() - user delimiter, SPACE
 A(%) - user delimiter, %
 END REPEAT
 A(7)
 END REPEAT
 END FIELD

FIELD 'V1' 'VECTOR/IMPLICIT POINT'
 PARENT 'Vx'
 FOR
 'int 1' I(4) - Cartesian label element & format term
 'int 2' I(4) - fixed length integer
 'int 3' I - variable, default delimiter, (1/14)
 'int 4' I - variable, user delimiter, "#"
 'int 5' I(#)
 'int 6' I(#)
 END FIELD

```

FIELD 'V6' 'VECTOR/MIXED DATA TYPES'
PARENT 'Vx'
PRINTABLE GRAPHICS '$$'
FOR
  'text 1'  A(4)
  'int 1'   I(4)
  'text 2'  A
  'int 2'   I
  'fp#'    S(%)
  'cmbf'   C
END FIELD

FIELD 'A0' 'CHARACTER ARRAY'
PARENT '01'
NUMERIC DESCRIPTOR 5,2
REPEAT
  A( )
END REPEAT
END FIELD

FIELD 'A1' 'ARRAY/IMPLICIT POINT'
PARENT 'A0'
FOR 'row 1' 'row 2' 'row 3' BY
  'col 1'   I(4)
  'col 2'   I(4)
END FIELD

FIELD 'A6' 'ARRAY/MIXED DATA TYPES'
PARENT A0
FOR BY
  'col 1'   A(4)
  'col 2'   I(4)
END FIELD

FIELD 'A7' 'ARRAY/NUMERIC ARRAY DESC'
PARENT 'A0'
NUMERIC DESCRIPTOR 3,2
REPEAT
  A(4)
  I(4)
END REPEAT
END FIELD

FIELD 'A8' 'ARRAY/NUMERIC ARRAY DESC IN DR'
PARENT 'A7'
STRUCTURE CODE 2
REPEAT
  I(4)
END REPEAT
END FIELD

- The following field has a vector catenated to an array
FIELD 'A9' 'CONCATENATED VECTOR\ARRAY'
PARENT 'A7'
FOR 'element 1' 'element 2'
REPEAT
  A($)
  I(5)
END REPEAT
THEN
  NUMERIC DESCRIPTOR 2,3
  REPEAT TO END
    I(6)
  END REPEAT
END FIELD

```

IECNORM.COM: Click to view the full PDF of ISO/IEC 8211:1994

- The following are host system parameters used to control the export software. Only the term "LOCAL" is a standard construct.
- LOCAL INPUT MODE 'C'
- LOCAL DROPPED LEADER 1
- not applicable to this example

IECNORM.COM: Click to view the full PDF of ISO/IEC 8211:1994

Annex C

(informative)

Informal Introduction to ISO/IEC 8211

ISO/IEC 8211 is an adaptation of ISO 2709 using its basic record structure and replacing its bibliographic data description by a general purpose data description, removing the magnetic tape limitations and, in this version, introducing binary octet counts.

In their simplest terms ISO/IEC 8211 constructs are divided into two groups:

- 1) Logical record and field constructs - Those necessary to reading an ISO/IEC 8211 logical record and to the isolation of the user data fields in the receiving system. See clause 5.
- 2) Data description and identification constructs - Those necessary to the isolation of each user subfield with its associated description and identification. See clause 6 and Annex D.

The result is a two layer standard in which the reading of records and fields as strings is quite independent of their interpretation as data description or data. The current document is organized in the same manner. This division of constructs lends itself not only to a quicker understanding but also to a better organization of implementation software. This annex provides the user with an informal explanation of the methodology.

The file or record import step is quite simple, the processing can be extremely reliable and is essential to all implementations. The disassembly of fields into subfields is related to the complexity of the user's data and its data description. Users need to master only the complexity required to describe their data and not the (usually) much greater complexity of the most general ISO/IEC 8211 application.

C.1 ISO/IEC 8211 File, logical record and field constructs

C.1.1 Media record constructs

ISO/IEC 8211 File Schematics:

Sequential Media:

block 1	block 2	block 3	block 4	block 5
---------	---------	---------	---------	---------

Non-sequential Media:

sector 1	sector 5	sector 3	sector 4	sector 2
----------	----------	----------	----------	----------

Logical Records:

record 1(DDR)	record 2	record 3	record 4^^^^^
---------------	----------	----------	---------------

ISO/IEC 8211 files may be transported by any means which preserves the integrity of the octet string of the file or any substring of the file requested by the receiver. When ISO/IEC 8211 logical records are written, blocked and spanned, into fixed-length media records (blocks, sectors or packets), the unused portion of the last media record is to be filled with CIRCUMFLEX characters, (5/14). This results in a file of fixed-length media records with the file termination under the control of ISO/IEC 8211 and independent of the media, except for the trivial case where a system end-of-file signal is received while trying to read a logical record. This practice minimizes the probability of any problems with current and future media including packet transmission and places minimal demands on the host receiving system.

A host receiving system is only required to read a fixed length media record as the ISO/IEC 8211 software can, when necessary, be responsible for the unblocking of logical records. This does not preclude a receiving system from reading the variable-length logical records if it is able to do so.

C.1.2 Logical record constructs

Logical Record Construct Schematic:

Record length (5)	Remaining octets
-------------------	------------------------

The ISO/IEC 8211 logical record is a trivial construct: a five octet record length followed by an octet string. The count includes its own length. The last octet of the record is a field terminator. The record length, when added to the starting position of the record, also points to the start of the next record and can be used to rapidly skip records or to produce a simple random

access index to the logical records. ISO/IEC 8211 supports both character and binary representations of record length and other octet counts. Long records in excess of 99 999 octets are supported.

C.1.3 Logical record structure

Logical Record Structure Schematic:

Leader(24)	Directory ...	Field Area ...
------------	---------------	----------------

The ISO/IEC 8211 logical records comprise three constructs which serve to locate the fields within a logical record. These constructs are:

1. The leader - Twenty four octets comprising fixed length subfields whose contents are necessary to reading the directory entries and locating fields.
2. The directory - comprising a variable number of fixed-length subfields, called directory entries, whose contents are necessary to identify and to locate a field.
3. The field area - comprising a variable number of variable-length fields whose identity, location and length are described by the directory entries. The field contents need not be known to the importing system at this time. All variable length fields are followed by a field terminator.

At the conceptual level, all ISO/IEC 8211 logical records have these three constructs although there are two simple variations which will be discussed later.

C.1.3.1 Leader (RP 0 - 23)

Leader Schematic:

Record length(5)	Leader identifier(1)	Version identifier(1)	Base address of data(5)	Directory map(4)
------------------	----------------------	-----------------------	-------------------------	------------------

Directory Map: Sizes of:

Field length	Field position	reserved	Field tag
--------------	----------------	----------	-----------

NOTE 50 - RP is the position relative to the start of a field or record.

In addition to the record length described above (RP 0 - 4), a leader comprises four subfields :

1. Leader Identifier - RP 6 - Indicates the variant of the logical records.
2. A version identifier - RP 8 - SPACE = ISO/IEC 8211:1985, "1" = this version.
3. Base Address of Data - RP 12-16 - Starting position of the field area = Number of octets in the leader and directory for the specific record.
4. Directory Map - describes lengths of directory entry subfields;

RP 20 - Length of Field Length Subfield,
 RP 21 - Length of Field Position Subfield,
 RP 23 - Length of Field Tag Subfield.

Additional DDR leader subfields related to data description will be described later.

C.1.3.2 Directory

Directory Schematic:

Entry 1	Entry 2	Entry 3	Entry 4	Entry 5
---------	---------	---------	---------	---------

Directory Entry Schematic:

Field tag	Field length	Field position
-----------	--------------	----------------

The directory has one directory entry for each field in the field area and is, by the field position, associated with a unique field. Each entry comprises the following subfields:

1. Field tag - identifies the associated field
2. Field length - the octet count for the field
3. Field position - relative to the Base Address of Data

The directory, being a variable length field, is terminated by a field terminator.

C.1.3.3 Field area

Field Area Schematic:

Field 1	#	Field 2	#	Field 3	#	Field 4	#	Field 5	#
---------	---	---------	---	---------	---	---------	---	---------	---

The single field area starts immediately after the directory and contains one field for each entry in the directory. The fields are contiguous and in the same order as the directory entries. Each field is terminated by a field terminator ("#").

The fields in the DDR, i.e., the first record, contain the ISO/IEC 8211 data descriptions and, in the DRs, they contain data. Each directory entry, by its tag, provides a unique association of a Data Field in a DR with a Data Descriptive Field in the DDR and thus allows a receiving system to decode the data field. The field length and the field terminator allow an integrity check.

C.1.4 File characteristics and processing

The above concludes the essentials of the logical record constructs of an ISO/IEC 8211 file. An understanding of these constructs provides a basis for understanding of the two variants as well as the role of user data and data description in ISO/IEC 8211 files. The most important point is that the above constructs, related to the basic import step, are NOT dependent on the content of fields, i.e., the nature of the data or the data description. The file has the following characteristics:

1. The constructs are simple and totally defined by ISO/IEC 8211.
2. The values of parameters are dependent only on octet counts of the data fields and not on the nature of the data. On export, these values should be computed by the exporting software from the octet counts and the control parameters of the exported files should be error free even if the field contents are in error.
3. There is sufficient redundancy to detect errors, i.e., inconsistent octet counts and field terminators, redundant directory information, et cetera.
4. Software, at this level, is simple and should be totally reliable. Short of hardware errors or exceeding software array size, import should be certain.

ISO/IEC 8211 Record/Field Import Algorithm: The following algorithm carries out the fundamental import step; i.e., moving the fields from the media into the recipient's computer system. Any further processing is performed within the recipient's system and, strictly speaking, is not a part of the import step.

1. get five octets (on end of file, stop), determine the record length,
2. get the remainder of the logical record,
3. determine the base address of data and entry map; determine the values in the size of tag, field length, and field position subfields,
4. process next directory entry (field tag, length and position), if none, goto 1.
5. process the corresponding field, goto 4.

The function "get" may be a variable octet READ or a subroutine which unblocks octets from the fixed-length media records.

The above algorithm can be implemented in most high level languages by a very simple program. The following example implements the algorithm for the character mode octet controls using Fortran.

```
CHARACTER A*32767, FMT*9, TAG*7
OPEN(1, FILE='DDF', STATUS='OLD', FORM='BINARY')
OPEN(2, FILE='IMPORT')
```

```
100 READ(1, END=300) A(1:5)
      READ(A(1:5), '(I5)', ERR=300) NA
      READ(1) A(6:NA)
      READ(A(13:24), '(I5,3X,2I1,1X,I1)') IB,NL,NP,NT
```

```

FMT='(A,I//CHAR(NL+48)//,I//CHAR(NP+48)//)'
ID=25

200 READ(A(ID:ID+NT+NL+NP-1), FMT) TAG(1:NT), LF, IF
  WRITE(2, '(A,1X,I5,1X,A)') TAG(1:NT), LF, A(IB+IF+1:IB+IF+LF)
  ID=ID+NT+NL+NP
  IF (ID.LT.IB) GOTO 200
  GOTO 100

300 END

```

Where the undeclared INTEGER variables are:

NA	the record length
IB	the base address of data
NL	the size of the field length field
NP	the size of the position field
NT	the size of the field tag field
ID	the index to a directory entry

The OPEN command for the DDF file may require variation for some hosts.

C.1.5 Variant logical records

The variants of ISO/IEC 8211 logical records serve two purposes:

1. Enabling very long records.
2. Reducing unneeded overhead.

C.1.5.1 Long ISO/IEC 8211 records

In the character mode, the maximum record length that may be recorded in the record length subfield is 99,999 octets. (The binary mode limit is much higher.) For longer records, this subfield is set to 0 and the import software must employ a slight variation in the import logic, i.e., rather than getting the entire record at one time, get the leader and directory and then get each field from the medium as the algorithm steps through the directory entries. This logic can also be used to reduce the array size required to read smaller records in a very small computer.

C.1.5.2 Fixed-formats - repeating leaders and directories

ISO/IEC 8211 files derived from very regular source data may have data records in which the DR leader/directories are identical. In order to conserve space, ISO/IEC 8211 permits the following:

- On export, place a "D" in RP 6 of each data record until reaching the first data record having the repetitious leader/directory. Place an "R" in RP 6 of this record. For the remaining data records, write only the data area into the file, terminating the file in the normal manner.
- On import when sensing the "R", retain the leader/directory and for the subsequent records, get only the data area and concatenate it to the retained leader/directory.

C.1.6 ISO/IEC 8211 End-of-data conditions

At end-of-data, software processing ISO/IEC 8211 files experiences a system generated end-of-file or encounters a circumflex in the first illegal location. These locations are at:

- 1) LDR RP 4 in files with all leaders present (LDR RP 6 = "D"),
- 2) The end of the first unused data field in files with dropped leader/directories (LDR RP 6 = "R").

Testing for these conditions is simple and can be confirmed, if desired, by testing for circumflex from the end of the media record back to the end of the last used ISO/IEC 8211 field. Detection of end-of-data is media independent, reasonably robust in cases of improper padding and does not require the double processing necessary to place a record count in the first record or establish some other anticipatory signal.

C.1.7 Summary of the logical record and field constructs

Even with the two variants, ISO/IEC 8211 files retain the desirable simple characteristics described in C.1.4. Export and import should have a high degree of reliability. Obviously, the user can mismatch a file and software at the host system level but these events are beyond the scope of a standard.

C.2 Data description and identification

The second component of the ISO/IEC 8211 transport model comprises data description and data identification. In order to focus attention on the model, only the general constructs of data description will be discussed in this annex with details presented in annexes D, E and F.

C.2.1 Components of data description

In its most general form, in addition to data identification, ISO/IEC 8211 data description has two components:

- 1) the description of subfields which have data type and data extent, and
- 2) the description of fields which may have internal structure and inter-field structure.

A data field consisting of subfields having the same data description can be said to have a data type, i.e., that of its subfields. A portion of each data descriptive field, i.e., the field controls, is devoted to a synopsis of the data description and for some simple descriptions is all that is necessary.

ISO/IEC 8211 data description comprises the following:

C.2.1.1 Data extent

At the subfield level, data subfield extent can be either fixed or variable. For a fixed extent a subfield width is given in the DDR format controls and for a variable extent the end of a subfield is determined by the presence of a subfield delimiter in the data field, which is specified in the format controls for the field.

C.2.1.2 Data position

At the subfield level, the position of each subfield is determined from the subfield extents by simultaneously traversing the data field and the data description. If all the subfields have the same fixed width the position of the *i*-th subfield can be computed without traversing the preceding subfields.

C.2.1.3 Data structure

Data structure is a characteristic of a field indicated in the DDR field controls with further details supplied by an array descriptor. The label form of the array descriptor is closely related to the identification of subfields. Elementary data items, *n*-tuples, multi-dimensional arrays and sets are accommodated. The arrays may be regular or irregular. Instances of unlabeled arrays may have variable dimension and extents throughout a file. Unlabelled linear structures, e.g., sets, lists, can have an indeterminate number of items.

Special arrays such as diagonal matrices, triangular matrices, et cetera need to be transferred as an application-specific structure.

C.2.1.4 Data type and syntax

Data type and its implied syntax is specified in the format controls in the DDR. Both character and binary representations are accommodated: five character mode data types, bit strings and five binary data types each with several precisions.

Extended character sets may be defined on a filewise or fieldwise basis with provision for inline sets. ISO 2022 and ISO/IEC 10646 methods are accommodated.

C.2.1.5 Intra-field tree structure

ISO/IEC 8211 supports an ordered, rooted tree structure in which the nodes are the data fields. The tree structure is described by the preorder traversal sequence and the parent-offspring binary relation or by left- and right- hand links. For most trees the overhead is negligible. The data trees can have repeating and missing subtrees. See annex F.

Except for inter-field tree structure, the data description of one field is independent of other fields and the data descriptions reside in the DDR quite independently of the data fields in the DRs. This makes it feasible to assimilate the data descriptions prior to data field processing converting it to more effective forms if desired and retaining it for future use if desired.

C.2.2 Data identification

Data identification at the field level consists of the ubiquitous field tag and an optional field name.

At the subfield level, data items may be identified by labels (which also contribute to structure definition). Only regular structures, those whose instances have constant dimension and extents, can be labelled. This is a logical constraint, not an ISO/IEC 8211 constraint; it is not possible to *a priori* enumerate labels for an indeterminate number of items. The labeling of multi-dimensional structures employs a Cartesian cross product, limiting the identification to rectangular structures.

There are quasi-regular structures which can be partially, but meaningfully, identified. The 2-d example of this form is a rectangular array with indeterminate repetition of the unlabelled rows (a table). Higher dimensioned structures have analogous forms.

ISO/IEC 8211 also supports the labelling of concatenated regular structures.

C.2.2.1 Application semantics

The data description capabilities of ISO/IEC 8211 relieve the application of considerable documentation of data syntax. The identification of fields and subfields enables the application to uniquely associate the application semantics with a data item. The ISO/IEC 8211 data description can be expressed in a convenient one tag/subfield per line format which can include subfield semantics and other comments. This format can be converted automatically into the data descriptive field form. See annex B.

C.3 File and record contents

Other than placing the data description in the DDR and the data in the DRs, ISO/IEC 8211 does not attempt to define what fields make a user's record nor what records make a file. These are strongly application dependent and left to the file designers who can define the content of each file by itemizing the records in order with proper attention to repetition factors and to define the content of each record by itemizing the field tags in a similar manner. A simple tree diagram usually suffices for even complex exchanges. An application interchange standard can add specifications as needed.

C.4 Binary directories

Binary mode directories introduce no new concepts, only a different representation, and were intended to facilitate the importation of selected data from large files on large direct access devices. They can also reduce the storage overhead. Their increased efficiency may be more anticipated than real for three reasons:

1. Except for very slow processors and very big directories, the directory processing time for the character mode is small compared to the read time.
2. Several computers do not store integers in the standard binary forms used.
3. Direct access indices can be constructed to eliminate much of the need for repetitive directory processing.

Binary mode directories should probably be used only where a distribution project can be assured of the nature of the data use.

Annex D (informative)

Introduction to ISO/IEC 8211 Data Description

This annex contains an informal introduction to ISO/IEC 8211 data description.

D.1 Data description - user data

ISO/IEC 8211 data description is mainly concerned with the interior of the user's data field and its complexity varies considerably with the interchange file level and the application. The following are guidelines for the beginner:

You must fulfill: Subclauses 6.1.1 and 6.1.4.

If you do not have:

1) Extended coded character sets (1)	Subclauses 6.1.2, 6.1.5, 6.2.4
2) Application specifics (1)	Subclause 6.1.3, 6.2.3
3) Ordered, rooted tree structure (1) External file title	Subclause 6.2.1.3 Subclause 6.2.1
4) Complex fields or bit fields Arrays Labels	Subclause 6.4.3.3 Subclause 6.4.3.2, 6.4.4 Subclause 6.4.3.2
5) Subfields	Subclauses 6.4

You can/may skip:

Some of the above are frequently not needed.

If you do not have any of these, then you have a level 1 file; the data are strings requiring no description beyond that given in the directory entry (tag, length, position) and perhaps an optional field name. Mastering data description in the reverse of the above order simplifies the task.

D.2 Consistency of data description and data - validation

Although the processing of data description and identification is not as foolproof as that of the logical record structure, an exporter in possession of complete ISO/IEC 8211 software can validate an interchange file verifying that the data description is syntactically correct and semantically consistent. The syntactic consistency of the data description and the data can also be automatically validated. The data can be in error, outside of reasonable ranges or semantically wrong but these questions are in the realm of the application, not a general purpose interchange standard.

D.2.1 Complexity of data description

Simple user data requires only simple data description. Conversely, complex user data requires complex data description and an interchange standard would be deficient if it could not meet user needs. The complete ISO data description facility is complex albeit well defined. The user need master only that portion suited to their data. Data description is a tool and like most tools requires some dexterity on the part of the user. There appears to be no easy remedy for the file designer. This section introduces data description by level of complexity and not with exhaustive detail.

ISO/IEC 8211 permits the use of character sets other than BCS. The use of these sets appears complex to the non-user. They are also of little interest to the non-user who need only place SPACES in DDR RP 7 and 17-19 to avoid them. This is discussed in detail in Subclause D.6.

Short of intra-record tree structure, which is a deferred topic, data description is located in the first record of the file, the Data Descriptive Record (DDR). The DDR must contain, in its directory, one and only one instance of each tag that is in the subsequent Data Records (DRs). As described earlier, each tag in a directory is associated with one and only one field in the field area. In the DDR, this field contains an appropriate data description. Since each data field of the DRs is uniquely associated with one of these tags in its directory, there is a unique association of a data field with its data description. The ISO/IEC 8211 tag in a directory entry is a unique identifier of both a data descriptive field in the DDR and an associated user data field in the DRs. It is the key to ISO/IEC 8211 subfield processing.

D.2.2 Level 1 data description

The data fields of a level one interchange file contain octet strings of user data and the data description is a simple field name. Thus at level 1 the simplest ISO/IEC 8211 data description is nothing but the field tag serving as an identifier and the most complex data description is a field name. ISO/IEC 8211 "knows" nothing about the user data string except where it is and how long it is. Any bit pattern is allowed and obviously all manner of application defined syntax and structure can exist in the string but it is undefined by the data description. In fact, the data string can have all the characteristics of a composite ISO/IEC 8211 field and this is still unknown to the level 1 data description.

This has one very useful capability, a very complex application data string can be easily transported in a level 1 ISO/IEC 8211 file. Also a faulty data description need not stop the basic import process as it can be independent of the data description.

D.2.3 Level 2 and 3 data description

The data fields of level 2 and level 3 interchange files comprise subfields which require subfield data description, e.g., extents, data types, data structures, and subfield identification. Data type and data structure can be separable or related; data identification and data structure are likewise related; subfield extents may be fixed or variable or both. Yet even this potentially complex topic can be addressed in increasing order of complexity. The several facets of data description are listed below with subtopics in order of increasing complexity:

Subfield extents - separable

Fixed

Variable

System delimiter

User delimiters

Data types - separable, many straight forward choices

Homogeneous fields - all subfields the same data type

Character representation

Text

Numeric

Integer

Real

Exponential

Logical

Binary representation

Unstructured bit field

Structured bit field

Unsigned integer

Signed integer

Real

Floating point

Complex

Inhomogeneous fields

All of the above

Data structure - related to labeling

Regular structures

Elementary data items

Linear structures - i.e., n-tuples

2-D Structures i.e., rectangular arrays

n-D Structures

Quasi-regular Structures

Repeating "row" tables

Concatenated regular structures

Irregular structures - loose associations, indefinite size

Ordered sets, lists

Unordered clusters

Identification

Fields - Field name same as level 1

Subfields - related to structure

No identification (i.e., labels)

Subscripts - related to structure

Labels - related to structure

Simple labels
Vector labels
Cartesian labels
Compound Cartesian labels

The above appears overwhelming but the following comments reduce it to a reasonable level:

1. On import, good software "knows" what to do.
2. Extents and data types are separable and basically simple.
3. Most data is no more complicated than an n-tuple which is easily described. The most used variant, i.e., a 2-D array, is a trivial addition.
4. Most of the difficult questions of data description are questions of efficiency and of concern only for files containing large numbers of a particular data field. In a large interchange there are usually no more than a few such field types.

D.3 Data description constructs

The following presents the constructs of data description limiting the scope to the most useful forms which will meet needs of most users.

D.3.1 Subfield extents

The choices here are quite simple: the data is either fixed length or it is not. If the subfield is variable length, the choice of a delimiter is easy: use the system default, UT, or a printable character which is not in the data.

There is only one efficiency concern: use fixed length if possible; it may be desirable to place "nearly fixed length" data into a fixed length subfield.

D.3.2 Data types

Most data is clearly of one type or another although numbers can sometimes be placed in alternate type subfields. The following simple guidelines suffice:

1. Use binary forms for large volumes of data (efficiency).
2. Data type character is always valid but may require application specification.
3. Do not place composite integers (e.g., date, YYYYMMDD) into integer subfields; use more subfields or type it as text.
4. Make use of format repetition rules.
5. Data types can be mixed in a field.
6. The data type of homogeneous fields can be stipulated in the field controls, RP 1.
7. Delimited homogeneous fields, except bit fields, do not require formats.

D.3.3 Field identification

As in level 1 files, field identification is a simple text string, i.e., Field Name.

D.3.4 Data structure without subfield identification

Data structure without subfield identification is most applicable to arrays containing numbers but not restricted to them. Storage order and derived subscripts are the only identification of subfields. The following guidelines suffice:

1. Indicate the dimensionality of the structure in the field controls, RP 0 (0 = 0-D; 1 = 1-D; 2 = multi-dimensional).
2. Dimension and extents

Zero and one dimension - nothing required, field exhaustion determines the number of data items. Field length must be correct. Use this form for sets (ordered and unordered), lists, clusters and n-tuples with application identified items.

Multi- Dimensional - use the numeric array descriptor. Field length must (always) be correct. Use for matrices, etc.

3. If possible, do not use the variable dimension/extents feature.

D.3.5 Data structure with subfield identification

The ISO/IEC 8211 subfield identification is also used to determine the dimension and extents of structured arrays. Only regular and quasi-regular structures can be labelled. Regular structures have fixed dimension and fixed extents. Quasi-regular structure (tables with repeating rows) have all but the first extent fixed; this extent is not labeled. There is no à priori way to determine the fixed number of labels to supply for a varying extent. The following guidelines will suffice for a lot of user data descriptions:

1. Indicate the dimensionality of the structure in the field controls, RP 0 (0 = 0-D; 1 = 1-d; 2 = multi-dimensional).
2. Elementary data items - a label is redundant and may be omitted.
3. N-tuples - use a simple label for each data item.
4. 2-D Arrays - use a Cartesian label comprising a "row" vector label and a "column" vector label. One row label for each row; one column label for each column. Note that the identifying labels of the data items are the terms in the expansion of the Cartesian label, not the terms in the Cartesian label itself.
5. Higher dimension arrays - these are an extension of the above which are seldom used; defer its study until you need it.
6. Repeating row arrays - these have an unlabeled repeating "row"; merely use a null row vector label. Do not drop the "*" as it is needed to determine the dimension. This form may also be used to reduce the overhead associated with a large number of n-tuples. This conversion requires an "*" before the first label and a "2" in the structure code. Row labels may also be provided as the first data item of a row.
7. Compound regular structures - these are concatenations of regular structures, concatenate their labels (Cartesian, vector or simple) in the same order with "\\"s as delimiters. You can still have a null row vector but only one of them, in the last structure. The most common concatenated structure is an n-tuple plus a 2-D structure.

D.4 Large application data structures

Applications may have truly large application data structures, e.g., several million n-tuples, which are unreasonably large for a single field or record. (ISO/IEC 8211 fields and records can be as large as 10^{10} -1 octets long.) In this circumstance allow the application data structure to span several ISO/IEC 8211 fields or records in order that the demands on the receiver's computer will be reasonable. The common tag will allow the user to re-associate the n-tuples as needed. Any modern computer, even "small" ones should be able to process fields and records of 32 000 octets. Above this value, inefficiencies may occur.

There are large extremely regular data sets, e.g., uncompressed, non-run-encoded raster data, for which there is little justification for converting to ISO/IEC 8211 even though it can be easily done and the adjoint information describing such a file is a proper candidate.

D.5 Intra-record tree structures

ISO/IEC 8211 having almost no constraints on level 1 and 2 tag and field orders, has much less need to use tree structures as simple structure can be obtained by ordering. It is also true that as more data originates from relational environments, there is less need. Further, for instances of trees which are fixed in structure, an n-tuple can replace the tree. Lastly remembering that the network, tree and relational data models are logical equivalents. The receiver's point of view will be determined by the nature of their software.

Having given several caveats, it is true that many application problems do have hierarchical or ordered, rooted tree structures innately connected with them. For these the tree structure is quite appropriate and is not to be avoided. To create an ISO/IEC 8211 tree structure, it is only necessary to do two simple things for most trees:

- 1) Supply the list of tag pairs in the 0...0 field after the file title.
- 2) Order the tag and fields of both the DDR and DR in the same order as the preorder traversal sequence.

For trees in which tags and fields are their own offspring, it is necessary to use the left- and right-hand branches to avoid ambiguities. This is discussed in more detail in annex F.

D.6 Coded character set extensions

If at present you are not sending or receiving extended character sets there will be no requirement for this facility in ISO/IEC 8211. You can ignore it if you put SPACES in DDR RP 7 and RP 17-19.

Extended character sets have little to do with the export or import of user data and a lot to do with how it is interpreted, especially, how it is displayed. A fully formed user data string containing extended sets can be placed in a field by the sender and taken out again by the receiver and this should be transparent to ISO/IEC 8211 software.

If you are using extended character sets, you probably know enough about ESC sequences and HOP sequences to use the ISO/IEC 8211 facilities after a little study. If not, you are referred to ISO 2022 and ISO/IEC 10646. This topic is beyond the scope of this annex.

IECNORM.COM : Click to view the full PDF of ISO/IEC 8211:1994

Annex E

(informative)

Examples of Data Description

This annex contains several examples of data descriptive fields and the corresponding data fields. An ISO/IEC 8211 file can be read by humans only with great difficulty. These examples are presented as ISO/IEC 8211 fields, extracted from the ISO/IEC 8211 file but still associated with their identifying tag and octet count. Each tagged field is depicted in the following input record format:

tag octet_count field_string

where the number of SPACES between record elements is immaterial but the number of SPACES in the data is critical to the octet count. The field terminators which must occur at the end of each field are not shown.

Throughout the examples, the true system delimiters, UT and FT, are unprintable and the printable characters, specified in the data descriptions, RP 4, 5, have been substituted:

; - Field terminator character,
& - Subfield delimiter character.

The examples are illustrated by DDF records and, if restored to a DDF, the collected data descriptions and data would form a legitimate file. An example of the DDR leader and external file title field showing values in the applicable subfields is included. The comments included in the data are a part of the explanation of the examples.

The data description for fields at level 2 consists of:

1) Six bytes of controls (nine if a fieldwise escape sequence is present):

- a) RP - 1 data structure code
- b) RP - 2 data type code
- c) RP - 3,4 ancillary data type parameters for bit field
- d) RP - 5 printing graphic for the field terminator, FT
- e) RP - 6 printing graphic for the unit terminator, UT

2) An optional field name terminated by UT.

3) An optional vector or Cartesian label terminated by UT.

4) A format describing the subfield data type, subfield width or its delimiters. The format is optional for many fields except for those fields containing mixed data types, fixed-width subfields, user delimiters and bit subfields.

The examples presented include fixed-width subfields and variable width subfields using both standard delimiters and user-selected delimiters. They are described by formats where applicable.

E.1 Leader and file title field

This example shows the prototype of a DDR leader with the user supplied values in place and the file control field for a level 2 DDF.

DDR RP 5 contains a "2" and DDR RP 10-11 contains an "06". The △ character represents a SPACE in the following example.

000002L△△△0600000△△△1102
00 24 0000;&DDF Examples File;

E.2 Examples of formats

E.2.1 Elementary data fields

Elementary data fields contain a single data item of any data type. The data structure and data type are given in the field controls of the data description and, except for bit fields, a format is not needed. The allowed elementary data fields and their data descriptions are:

```

01    14 0000;&Recid&&;
TX    13 0000;&Text&&;
E0    18 0000;&Character&&;
E1    23 0100;&Implicit Point&&;
E2    23 0200;&Explicit Point&&;
E3    30 0300;&Scaled Explicit Point&&;
E4    34 0400;&Character Mode Bit String&&;
E5    25 0500;&Bit Field&&(B(12));

```

NOTE - 51 The fields with tags 01 and TX occur in several of the examples without further definition.

Example data fields are:

```

01    5 00001
E0    59 Each field of this record contains an elementary data item.
E1    5 12345
E2    6 54.321
E3    11 0.314159E+1
E4    9 101100111
E5    2 qw

```

E.2.2 Linear structures

ISO/IEC 8211 vector data fields contain linear data structures which may be of a single data type or mixed data types. The data structure and data type (except for mixed) are given in the field controls of the data description and the format is optional except for those fields which contain mixed data types, fixed-width subfields, user selected delimiters and bit fields. In this example, each field contains fixed-width and delimited subfields and a format is used to convey the subfield description.

The ISO/IEC 8211 vector data structure is used to interchange: a) a mathematical numeric vector, b) a n-tuple which may have mixed data types and c) an unordered set of data items of indeterminate number. The allowed vector data types and their data descriptions are:

```

V0    31 1000;&Vector/Character&&(A( ));
V1    6 1100;&Vector/Implicit Point&&(2I(4),2I,2I(#));
V2    46 1200;&Vector/Explicit Point&&(2R(5),2R,2R(@));
V3    53 1300;&Vector/Scaled Explicit Point&&(2S(8),2S,2S($));
V4    57 1400;&Vector/Character Mode Bit String&&(2C(3),2C,2C(%));
V5    32 1500;&Vector/Bit Field&&(7B(4));
V6    54 1600;&Vector/Mixed Data Types&&(A(4),I(4),A,I,S(%),C);

```

Example data fields are:

```

01    5 00002
V0    59 Each field of this record contains a vector data structure.
V1    25 43218765234&765&9867#2638
V2    31 36.4357.8333.4&4.786&3.56@8.965
V3    51 123.4E+2234.5E-33.254E+1&4.556E+2&345.1E-2$34.56E-4
V4    26 1010101100&10101&1001%1111
V5    4 asdf
V6    33 TEXT1234moretext&432&1.78E-1%1101

```

E.2.3 Multi-dimensioned arrays

The array structure type is used to interchange data structures of two or more dimensions containing a single data type or mixed data types. The format requirement is the same as for vector fields. Some form of dimension and extent description is required. Only the unlabelled fixed- and variable-dimension/extent forms are illustrated in this example. The fixed numeric descriptors are in the DDR label field. For the variable dimension/extent array (AV), the numeric descriptor is in the data field.

Appropriate data description fields are:

```

A0    35  2000;&Array/Character&2,5,2&(A( ));
A1    40  2100;&Array/Implicit Point&2,3,2&(I(4));
A2    40  2200;&Array/Explicit Point&2,2,3&(R(3));
A3    47  2300;&Array/Scaled Explicit Point&2,2,2&(S(6));
A4    51  2400;&Array/Character Mode Bit String&2,3,2&(C(3));
A5    39  2500;&Array/Bit Field&3,2,2,3&(12B(4));
A6    47  2600;&Array/Mixed Data Types&2,4,2&(A(4),I(4))
AV    51  2600;&Variable Array/Mixed Data Types&&(A(4),I(4));

```

Example data fields are:

```

01    5  00003
A0    59  Each field of this record contains an array data structure.
A1    24  123456789012345614829342
A2    18  1.12.23.34.45.56.6
A3    24  0.1E+12.3E-44.4E-25.5E+3
A4    18  101010110001011110
A5    6  zxvcvbn
A6    32  TEST2345CASE6543NEXT8765LINE7954
AV    38  2&4&2&TEST2345CASE6543NEXT8765LINE7954
AV    38  2&2&4&TEST2345CASE6543NEXT8765LINE7954
AV    40  3&2&2&2&TEST2345CASE6543NEXT8765LINE7954

```

E.3 Examples of bit fields

This subclause provides several examples of bit subfields including variable-length bit subfields. Adjacent, fixed-width bit subfields are contiguous without intervening zerofill. The last subfield has zerofill to complete the octet. The examples have been chosen so the bit fields plus any zerofill are ASCII characters and can be printed.

Varying-length bit subfields have a one octet count specifying the length of the adjacent bit count field (in digits) followed in turn by the bitfield data itself. The next subfield starts on an octet boundary. ISO/IEC 8211 does not define the meaning of bit field data, only the subfield length.

Appropriate data description fields are:

```

B1    36  0500;&Elementary Bit Field&&(B(30));
B2    47  1500;&Vector Bitfield&&(B(10),B(3),B(6),B(1));
B3    36  1600;&Mixed Bit Field&&(B(13),A(3));
B4    36  1600;&Mixed Bit Field&&(A(3),B(13));
B5    39  1600;&Mixed Bit Field&&(3(B(13),A(3)));
B6    39  1600;&Mixed Bit Field&&(3(B(13),A(#)));
B7    40  1500;&Two Varying Bit Subfields&&(2(B));
B8    47  1600;&Varying Mixed Bit Field&B!Chars&(B,A);

```

Example data fields are:

```

01    5  00011
TX    37  These Records Exemplify Bit Subfields
TX    58  These Fields Contain Several Combinations Of Bit Fields In
TX    57  Combination With Other Types. These Bit Fields Have Been
TX    52  Chosen To Enable Display And Are Input As Lower Case
TX    54  Characters. Varying Length Bit Subfields Are Preceded
TX    44  By A Bit Count As Delimiters Cannot Be Used.
<End of DDF record>
01    5  00012
B1    4  qwer
B2    3  asd
B3    5  zxCHR
B4    5  CHRcv
B5    15  ui123JK456nm789
B6    19  ad@123#cg45#mt6574#
B7    10  19qw217asd
B8    12  215fgQWERTYz

```

E.4 Examples of binary forms

The following are examples of data descriptions for some binary forms.

Appropriate data description fields are:

b1	31	0512;&Elementary Binary Form&&;	(2 octet, unsigned integer)
b2	28	1524;&Vector Binary Form&&;	(4 octet, signed integer)
b3	43	1600;&Mixed Binary Forms&(B22,B24,B34,B48);	
b4	32	2544;Array/Real Floating&2,3,4&;	
b5	49	2600;&Array/Mixed Real Floating&2,4,3&(2B44,B48);	
b6	56	1600;&Vector/Mixed Data Types&integer1!words&(B11,A(#));	

The applicable data fields follow using printable, lower case characters to simulate binary patterns and suggest subfield contents.

b1	2	ui
b2	16	sin1sin2sin3sin4
b3	8	sisintrlfxrealfltg
b4	48	r1c1r1c2r1c3r1c4r2c1r2c2r2c3r2c4r3c1r3c2r3c3r3c4
b5	64	r1c1r1c2r1c3longr2c1r2c2r2c3longr3c1r3c2r3c3longr4c1r4c2r4c3long
b6	28	ione-octet, unsigned integer#

E.5 Examples of subfield labelling

This subclause deals with labels both as subfield identifiers and array dimension/extent descriptors. Labels are optional and can be applied only to those data structures which are of definite and fixed-extents. The exception to this is the array with indefinitely repeating rows without "row" labels for which the columns (or higher dimensioned cross section) can be labelled. Thus, "vectors" which represent instances of sets of varying numbers of items cannot be labeled nor can instances of arrays having variable dimensions/extents be labeled. The label of the only subfield in a field containing a single elementary data item is always redundant; however it is permitted.

E.5.1 Redundant elementary field label

The label of the only subfield of an elementary field is redundant if present.

Appropriate data description fields are:

e0 33 0000;&Character&redundant label&;

Example data fields are:

01 5 00021

TX

e0 59 Each field of this record contains an elementary data item.

E.5.2 Vector labels

The subfields of a vector structure are labelled by a vector label which consists of individual subfield labels separated by a "!"'. Any characters except "!", "*" and "\\" may be used but good practice would dictate graphics characters. The number and sequence of subfield labels should agree with the number and sequence of the subfield data items they identify. A subfield label can be null (i.e., "!!").

Appropriate data description fields are:

v0	31	1000;&Vector/Character&&(A());	(There are no labels.)
v1	81	1100;&Vector/Implicit Point& int 1!int 2!int 3!int 4!int 5!int 6&(2l(4),2l,2l(#));	
v6	88	1600;&Vector/Mixed Data Types& text 1!int 1!text 2!int !fp#!cmbf&(A(4),l(4),A,I,S(%),C);	