

---

---

**Assembly tools for screws and  
nuts — Double-headed open-ended  
engineers' wrenches — Outside  
dimensions**

*Outils de manoeuvre pour vis et écrous — Clés à fourche doubles —  
Dimensions extérieures*

STANDARDSISO.COM : Click to view the full PDF of ISO 10102:2018



STANDARDSISO.COM : Click to view the full PDF of ISO 10102:2018



**COPYRIGHT PROTECTED DOCUMENT**

© ISO 2018

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
CP 401 • Ch. de Blandonnet 8  
CH-1214 Vernier, Geneva  
Phone: +41 22 749 01 11  
Fax: +41 22 749 09 47  
Email: [copyright@iso.org](mailto:copyright@iso.org)  
Website: [www.iso.org](http://www.iso.org)

Published in Switzerland

# Contents

	Page
Foreword .....	iv
1 Scope .....	1
2 Normative references .....	1
3 Terms and definitions .....	1
4 Dimensions .....	1
5 Designation .....	4
6 Marking .....	4
Bibliography .....	5

STANDARDSISO.COM : Click to view the full PDF of ISO 10102:2018

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see [www.iso.org/directives](http://www.iso.org/directives)).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see [www.iso.org/patents](http://www.iso.org/patents)).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT) see the following URL: [www.iso.org/iso/foreword.html](http://www.iso.org/iso/foreword.html)

This document was prepared by Technical Committee ISO/TC 29, *Small tools*, Subcommittee SC 10, *Assembly tools for screws and nuts, pliers and nippers*.

This third edition cancels and replaces the second edition (ISO 10102:2001), which has been technically revised with the following changes:

- Tables 1 and 2 have been merged into one [Table 1](#);
- sizes of pairings have been added;
- title has changed.

# Assembly tools for screws and nuts — Double-headed open-ended engineers' wrenches — Outside dimensions

## 1 Scope

This document specifies the overall length and the maximum head thickness for double-headed open-ended engineers' wrenches.

NOTE The wrenches covered by this document are the ones identified in ISO 1703:2005 under reference No. 1 1 01 02 0.

This document does not cover technical specifications for these products. Technical specifications are given in ISO 1711-1:2016, series C.

## 2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 691, *Assembly tools for screws and nuts — Wrench and socket openings — Tolerances for general use*

ISO 3318, *Assembly tools for screws and nuts — Open-ended wrenches, box wrenches and combination wrenches — Maximum widths of heads*

## 3 Terms and definitions

No terms and definitions are listed in this document.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <http://www.electropedia.org/>

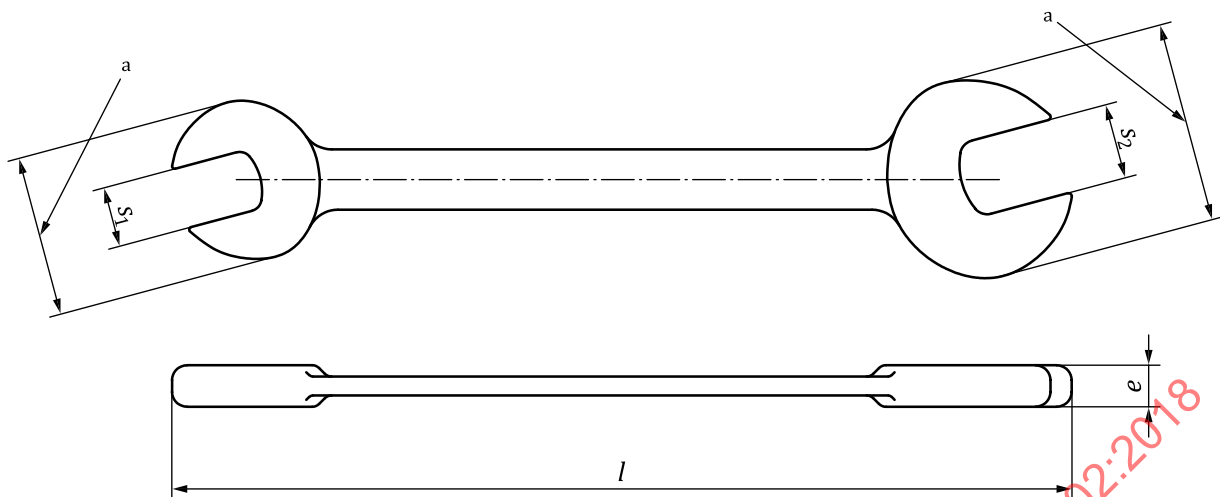
## 4 Dimensions

The length,  $l$ , and thickness,  $e$ , are given in [Table 1](#), which is based on the following formulae:

- $l_{\min} = s_1 \times 8 + 55 \text{ mm}$ , except for pairing  $34 \times 36$
- $e_{\max} = s_2^{0,75}$
- $l_{\max} = l_{\min} \times 1,4$

The maximum outside head dimensions shall be those specified in ISO 3318.

[Figure 1](#) is given only as an example. It is not intended to influence the manufacturer's design.

**Key**

- $e$  thickness  
 $l$  length of the wrench  
 $s_1, s_2$  nominal width across flats  
 $a$  Maximum outside head dimensions according to ISO 3318.

**Figure 1 — Double-headed open-ended engineers' wrench****Table 1 — Lengths of wrenches and thickness of the heads**

Pairing <sup>a</sup> Nominal sizes $s_1 \times s_2$	mm		$e$ mm maximum
	minimum	maximum	
3,2 × 4	81	113	3
3,2 × 5,5	81	113	3,5
4 × 5	87	122	3,5
5 × 5,5	95	133	3,5
5,5 × 7	99	139	4,5
6 × 7 <sup>b</sup>	103	144	4,5
7 × 8	111	155	4,5
8 × 9 <sup>b</sup>	119	167	5
8 × 10	119	167	5,5
10 × 11	135	189	6
10 × 12 <sup>b</sup>	135	189	6,5
10 × 13	135	189	7
11 × 13	143	200	7
12 × 13 <sup>b</sup>	151	211	7
12 × 14 <sup>b</sup>	159	223	7
13 × 14 <sup>b</sup>	159	223	7
13 × 15	159	223	7,5
13 × 16	159	223	8

<sup>a</sup> The tolerances on openings  $s_1$  and  $s_2$  shall conform with ISO 691.  
<sup>b</sup> The pairing contains at least one value of  $s$  not covered by ISO 272:1982.  
<sup>c</sup> This pairing is not covered by ISO 1085.

Table 1 (continued)

Pairing <sup>a</sup> Nominal sizes $s_1 \times s_2$	<i>l</i> mm		<i>e</i> mm
	minimum	maximum	maximum
13 × 17 <sup>b</sup>	159	223	8,5
14 × 15	167	234	7,5
14 × 16	167	234	8
14 × 17 <sup>b</sup>	167	234	8,5
15 × 16	175	245	8
15 × 17 <sup>b</sup>	175	245	8,5
15 × 18	175	245	8,5
16 × 17 <sup>b</sup>	183	256	8,5
16 × 18	183	256	8,5
17 × 19 <sup>b</sup>	191	267	9
18 × 19 <sup>b</sup>	199	279	9
18 × 21	199	279	10
19 × 22 <sup>b</sup>	207	290	10,5
19 × 24 <sup>b</sup>	207	290	11
20 × 22 <sup>b</sup>	215	301	10
21 × 22 <sup>b</sup>	223	312	10
21 × 23 <sup>b</sup>	223	312	10,5
21 × 24	223	312	11
22 × 24 <sup>b</sup>	231	323	11
24 × 26 <sup>b, c</sup>	247	346	11,5
24 × 27	247	346	12
24 × 30	247	346	13
27 × 29 <sup>b, c</sup>	271	379	13
27 × 30	271	379	13
27 × 32 <sup>b</sup>	271	379	13,5
30 × 32 <sup>b</sup>	295	413	13,5
30 × 34	295	413	14
30 × 36	295	413	14,5
32 × 34 <sup>b</sup>	311	435	14
32 × 36 <sup>b</sup>	311	435	14,5
34 × 36	327	458	14,5
36 × 41	343	480	16
41 × 46	383	536	17,5
46 × 50	423	592	19
50 × 55	455	637	20,5
55 × 60	495	693	22
<sup>a</sup> The tolerances on openings $s_1$ and $s_2$ shall conform with ISO 691. <sup>b</sup> The pairing contains at least one value of $s$ not covered by ISO 272:1982. <sup>c</sup> This pairing is not covered by ISO 1085.			

## 5 Designation

A double-headed open-ended engineer's wrench in accordance with this document shall be designated by:

- a) “wrench”;
- b) a reference to this document, i.e. ISO 10102;
- c) pairing according to [Table 1](#).

**EXAMPLE** A double-headed open-ended engineer's wrench with the pairing  $s_1 \times s_2 = 18 \times 21$  is designated as follows:

Wrench ISO 10102 —  $18 \times 21$

## 6 Marking

Double-headed open-ended engineers' wrenches shall be marked, permanently and legibly, with at least the following:

- a) nominal widths across flats;
- b) name or trademark of the manufacturer (or the responsible supplier).