

NFPA No.
306

CONTROL OF GAS HAZARDS ON VESSELS TO BE REPAIRED 1963



Fifty Cents

Copyright © 1963

NATIONAL FIRE PROTECTION ASSOCIATION
International

60 Batterymarch Street, Boston 10, Mass.

3M-6-63-FP
Printed in U.S.A.

National Fire Protection Association

International

The National Fire Protection Association was organized in 1896 to promote the science and improve the methods of fire protection. Its membership includes national and regional societies and associations (list on outside back cover) and twenty-one thousand individuals, corporations, and organizations. Anyone interested may become an Associate Member; the annual dues are \$20.00. Full membership information is available on request.

This is one of a large number of publications on fire safety issued by the Association. All NFPA standards and recommended practices, including this text, are prepared by the technical committees of the NFPA and adopted at an Annual Meeting of the Association. They are intended to prescribe reasonable measures for minimizing losses of life and property by fire.

This text and most other NFPA standards and recommended practices are published in the **National Fire Codes**, a compilation of NFPA's official technical material. Full information on the availability of these Codes and other NFPA publications can be secured from the Association.

Official NFPA Definitions

SHALL is intended to indicate requirements.

SHOULD is intended to indicate recommendations, or that which is advised but not required.

APPROVED refers to approval by the authority having jurisdiction.

Units of measurements used here are U. S. standard. 1 U. S. gallon = 0.83 Imperial gallons = 3.785 liters. One foot = 0.3048 meters. One inch = 25.40 millimeters. One pound per square inch = 0.06805 atmospheres = 2.307 feet of water.

Approved Equipment

The National Fire Protection Association does not "approve" individual items of fire protection equipment, materials or services. The suitability of devices and materials for installation under NFPA standards is indicated by the listing of nationally recognized testing laboratories, whose findings are customarily used as a guide to approval by agencies applying these standards. Underwriters' Laboratories, Inc., Underwriters' Laboratories of Canada, the Factory Mutual Laboratories and the American Gas Association (gas equipment) test devices and materials for use in accordance with the appropriate standards, and publish lists which are available on request.

Copyright and Republishing Rights

This publication is copyright © by the National Fire Protection Association. Permission is granted to republish material herein in laws or ordinances, and in regulations, administrative orders or similar documents issued by public authorities. Those desiring permission for other republication should consult the National Fire Protection Association.

Discount Prices on this Pamphlet

The following schedule of discount prices for multiple copies of this pamphlet have been established:

6-11 copies: 10%	24- 47: 20%
12-23 copies: 15%	48-100: 25%

Over 100: Special Quotation

**Standard for the
Control of Gas Hazards
on Vessels to be Repaired**

NFPA No. 306 — 1963

1963 Edition of No. 306

The 1963 edition of this standard is the same as the 1962 edition insofar as technical content is concerned. The only changes are editorial in character and take account of the administrative change occasioned by the transfer of responsibility for the certification of Marine Chemists from the American Bureau of Shipping to the National Fire Protection Association. In addition, the personnel of the Sectional Committee on Gas Hazards as shown herein is as of June, 1963. It should be noted that many of the committee members have been appointed subsequent to the adoption of the standard in 1962.

Origin and Development of No. 306

The original standard on this subject was developed by the NFPA Committee on Marine Fire Hazards in 1922 in cooperation with the NFPA Committee on Flammable Liquids. It was adopted by the Association and published as "Appendix A" of the "Regulations Governing Marine Fire Hazards." Further editions with minor changes were published in 1923, 1926 and 1930. In 1947 a completely revised standard was prepared by a joint committee of the American Bureau of Shipping and the National Fire Protection Association. This was adopted and published in 1948 by the NFPA. Amendments were adopted in 1949, 1950, 1951, and 1960, and a revised edition was adopted in 1962.

Sectional Committee on Gas Hazards

Sydney Swan, Chairman,
American Bureau of Shipping

Capt. Kent M. Savage, † Secretary,
National Fire Protection Association

W. G. Anderson, American Petroleum Institute

Jack Baliff, American Conference of Governmental Industrial Hygienists

Rodney M. Elden, Pacific American Tankship Assn.

E. H. Enslin, American Waterways Operators, Inc.

Angel Garate, Shipbuilders Council of America

W. F. Hagestad, American Waterways Operators, Inc.

LeRoy B. Halsey, Shipbuilders Council of America

Joseph J. LaRocca, U. S. Department of Labor

W. J. Patten, Mfg. Chemists' Assn., Inc.

Commander Wm. F. Rea, III, USCG Acting Chief, Merchant Vessel Inspection Division, U. S. Coast Guard

E. A. Roberts, American Merchant Marine Inst.

Dr. H. G. Schneider, Humble Oil & Refining Company

Rear Admiral H. C. Shephard, USCG (Ret.), American Merchant Marine Institute.

(Continued)

†Non-voting.

John M. Techtton, Marine Chemists' Assn.

J. Paul Thompson, United States Salvage Assn., Inc.

T. T. Wilkinson, American Petroleum Institute

Alternates

Braxton B. Carr, American Waterways Operators, Inc. (Alternate to E. H. Enslin and W. F. Hagestad)

B. H. Lord, Jr., American Petroleum Institute. (Alternate to W. G. Anderson and T. T. Wilkinson)

Ralph W. Netterstrom, U. S. Department of Labor. (Alternate to Joseph J. LaRocca)

Committee on Marine Fire Protection

Thomas M. Torrey, *Chairman*,

Insurance Co. of North America, 79 John St., New York 38, N. Y. (Personal)

Charles S. Morgan, *† Secretary*,

National Fire Protection Assn., 60 Batterymarch St., Boston 10, Mass.

Braxton B. Carr, The American Waterways Operators, Inc.

Joseph E. Choate, National Assn. of Engine & Boat Mfrs.

R. Cox, Fire Equipment Manufacturers Assn.

Alan Cumyn, Canadian Department of Transport.

Frank W. Dunham, Jr., American Assn. of Port Authorities.

F. J. Fee, Jr., National Automatic Sprinkler & Fire Control Assn.

Rear Admiral Frank D. Higbee, USCG (ret.) (ex-officio), Chairman, Sectional Committee on Harbor Emergency Organization.

Vice Admiral James A. Hirshfield, USCG (ret.), Lake Carriers' Assn.

George W. Morgan, Assn. of American Ship Owners.

Capt. Henry J. Parker, National Cargo Bureau, Inc.

Roy C. Petersen (ex-officio), Chairman, Sectional Committee on Operation of Marine Terminals.

Rear Admiral O. C. Rohnke, United States Coast Guard.

Rear Admiral H. C. Shephard, USCG (ret.), American Merchant Marine Institute.

Earl S. Shulters, U. S. Department of Commerce.

J. Robert Snyder, Pacific Maritime Steamship Assn.

Sydney Swan (ex-officio), Chairman, Sectional Committee on Gas Hazards.

John M. Techtton, Marine Chemists' Assn.

E. S. Terwilliger (ex-officio), Chairman, Sectional Committee on Motor Craft.

J. Paul Thompson, U. S. Salvage Assn., Inc.

Pierre R. Vallet (ex-officio), Chairman, Sectional Committee on Marinas and Boat-yards.

T. T. Wilkinson, American Petroleum Institute.

Alternates.

Stanley Beckett, Canadian Dept. of Transport. (Alternate to A. Cumyn.)

B. H. Lord, Jr., American Petroleum Institute. (Alternate to T. T. Wilkinson.)

†Nonvoting.

CONTENTS

Page

Basic Provisions	306- 3
Definitions	306- 5
Safety Designations	306- 6
Minimum Requirements for Marine Chemist's Certificate	306- 8
Exemptions	306-13
Certification of Bulk Chemical Cargo Tanks	306-14
Marine Chemist's Certificate (specimen)	306-16

Standard for the Control of Gas Hazards on Vessels to Be Repaired

SECTION 1.

110. Scope. This standard describes the conditions required before making repairs on any vessel carrying or burning combustible or flammable liquids, or carrying flammable compressed gases. It is applicable to both cold work and to repairs involving riveting, welding, burning or like fire producing operations on vessels while in ports in the continental United States, both within and outside ship repair yards. It is applicable specifically to those spaces in such vessels which are subject to concentrations of combustible or flammable liquids or gases as hereinafter described. *Note: See also Section 5, paragraph 510.*

111. Tank Vessels Entering a Repair Yard. Tank vessels shall not be allowed to enter a repair yard, except as provided in Section 4 of this standard, unless cleaned or cleaned and inerted in accordance with the provisions in Section 3, paragraphs 320- or 330- respectively, and so certified by a Marine Chemist. Repairs or alterations shall not be undertaken until a Marine Chemist's certificate is obtained.

112. Tank Vessels Not Entering a Repair Yard. Repairs or alterations shall not be made, unless the compartments or spaces involved and the adjacent compartments or spaces have been cleaned, in accordance with the provisions in Section 3, paragraphs 340- or unless the compartment or spaces involved have been cleaned and the adjacent compartments or spaces have been inerted in accordance with paragraphs 350- and so certified by a Marine Chemist. Repairs or alterations shall not be undertaken until a Marine Chemist's certificate is obtained.

113. Vessels Other Than Tank Vessels Anywhere. On any vessels which have carried flammable or combustible liquid in bulk as fuel or cargo, whether in a repair yard or elsewhere, no repairs involving hot work shall be made in and on the external boundaries (shell, tank top or deck) of cargo tanks, fuel tanks, oil pipe lines and heating coils, unless such compartments and pipe lines, deemed necessary by the Marine Chemist, have been cleaned or inerted to meet the appropriate designation requirements of Section 2, paragraphs 220- except that the ap-

plication of 224(b) may be used only in the case of repairs not involving the tank top or decks of tank boundaries. In such cases paragraph 224(b) may be modified by partially flooding with water provided that any hot work is performed at least three feet below the water level; provided further that the gas content of the atmosphere above water does not exceed one half of one per cent by volume in air. In no case shall internal hot work be permitted within any compartment or space unless the compartment in which the work is to be performed is in such a condition as will meet the requirements of Section 2, paragraph 221. Repairs or alterations shall not be undertaken until a Marine Chemist's certificate is obtained.

114. Vessels Carrying Flammable Compressed Gas. On any vessels which have carried flammable compressed gas in bulk, no repairs or alterations involving hot work shall be made unless the applicable provisions of paragraphs 111 and 112 are complied with; provided, however, individual pressure tanks, inerted in accordance with paragraph 225, are considered in a safe condition for such work not directly involving these tanks or their pipe lines or the spaces in which these tanks are located.

120. Emergency Exception. Nothing in this standard shall be construed as prohibiting the immediate dry-docking of a vessel whose safety is imperiled, as by being in a sinking condition or by having been seriously damaged, making it impracticable to clean and gas-free in advance. In such cases however, all necessary precautionary measures should be taken as soon as practicable to provide safe conditions satisfactory to the Marine Chemist.

130. Governmental Regulations. Attention of owners, repairers and chemists is directed to the general regulations of the government covering repairs to vessels. Nothing in this standard shall be construed as superseding existing requirements of any governmental or local authority.

The "Rules and Regulations for Tank Vessels" and other rules and regulations for vessel inspection of the United States Coast Guard prescribe an inspection prior to making repairs involving riveting, welding, burning or like fire producing operations. These regulations provide, under the conditions stated therein, for inspection by a Marine Chemist certificated by the American Bureau of Shipping or alternately another person. For particulars, these regulations should be consulted.

SECTION 2.

210. Standard Definitions. (See also Section 5, paragraph 520.)

For the purpose of this standard the following definitions are to be recognized:

211. **MARINE CHEMIST:** The holder of a valid certificate issued by the National Fire Protection Association in accordance with its "Rules for Certification of Marine Chemists" establishing him as a person qualified to determine whether repairs and alterations to vessels, which may involve gas hazards, can be undertaken with safety.

212. **MARINE CHEMIST'S CERTIFICATE:** A written statement prepared and issued by a Marine Chemist in form and manner prescribed by the National Fire Protection Association. (See page 306-16.)

213. FLAMMABLE AND COMBUSTIBLE LIQUIDS:

- a. **FLAMMABLE LIQUID¹:** For the purpose of these requirements, a flammable liquid is any liquid which gives off flammable vapors (as determined by flash point from an open cup tester, as used for test of burning oils) at or below a temperature of 80°F.
- b. **COMBUSTIBLE LIQUID:** For the purpose of these requirements a combustible liquid is any liquid having a flash point above 80°F. (as determined by means of an open-cup tester as used for test of burning oils).

c. EQUIVALENT FLASH POINTS:

<i>Open Cup Tester</i> °F.	<i>"Tag" Closed Cup Tester (A.S.T.M.)</i> °F.	<i>Pensky-Martens Closed Tester</i> °F.
80	75	—
150	—	140

- d. **FLAMMABLE COMPRESSED GAS:** For the purpose of these requirements, flammable compressed gas is defined as any flammable gas which has been compressed and liquefied for the purpose of transportation and has a Reid vapor pressure exceeding 40 pounds.

¹Note: "Flammable" and "Inflammable" have the same meaning.

214. TANKER DESIGNATIONS:

- a. **TANK VESSEL:** A tank vessel is any vessel especially constructed or converted to carry liquid bulk cargo in tanks.
- b. **TANK SHIP:** A tank ship is any tank vessel propelled by power or sail.
- c. **TANK BARGE:** A tank barge is any tank vessel not equipped with means of self-propulsion.

215. REPAIR CLASSIFICATIONS:

- a. **HOT WORK:** Any repair or alteration involving riveting, welding, burning or similar fire-producing operations. Grinding, drilling or similar spark-producing operations shall be considered hot work except when in the judgment of the Marine Chemist, circumstances do not necessitate such classification.
- b. **COLD WORK:** Any repair or alteration which does not involve heat, fire and spark-producing operations.

220. Standard Safety Designations: (*See also Sect. 5, para. 530.*)

The following standard safety designations shall be used where applicable in preparing Marine Chemists' certificates, cargo tank labels and other references:

221. SAFE FOR MEN — SAFE FOR FIRE: Means that in the compartment or space so designated and in the adjacent² compartments or spaces:

- a. The gas content of the atmosphere by volume is within a permissible concentration,³ and that;
- b. In the judgment of the Marine Chemist, the residues are not capable of producing dangerous gases under atmospheric conditions and in the presence of fire.

222. SAFE FOR MEN — NOT SAFE FOR FIRE: Means that in the compartment or space so designated:

- a. The gas content of the atmosphere by volume is within a permissible concentration,³ and that;

²Note: Except that adjacent compartments may be inerted and, in the case of fuel tanks, may be treated as deemed necessary by the Marine Chemist.

³Note: As a guide to permissible concentration limits, refer to current table of "Threshold Limit Values" of the American Conference of Governmental Industrial Hygienists, 1014 Broadway, Cincinnati 2, Ohio; 25c per copy.

- b. In the judgment of the Marine Chemist, the residues are not capable of producing dangerous gases under atmospheric conditions and in the absence of fire.

223. NOT SAFE FOR MEN — NOT SAFE FOR FIRE: Means that in the compartment or space so designated, either:

- a. The gas content of the atmosphere by volume is not within a permissible concentration,³ or that;
- b. In the judgment of the Marine Chemist, the residues are capable of producing dangerous gases under atmospheric conditions, or that;
- c. The compartment was not tested because it contained ballast, slops, bunkers, etc. In such cases this safety designation shall be followed by a statement of the condition of the compartment which prevented it from being tested.

224. INERTED: Means that in the compartment or space so designated, either:

- a. Carbon dioxide or other approved nonflammable gas has been introduced into the space in sufficient volume to maintain the oxygen content of the atmosphere of the space at or below 10 per cent during the whole of the inerting period, and to insure that the volume of the inerting gas shall never be less than 50 per cent of that of the void space; or that
- b. The space has been filled to the top with water.
- c. The kind of gas and the safe disposal or securing of gas inerting media shall be noted on the Marine Chemist's certificate by the Marine Chemist upon the completion of repairs. Closing and securing of hatches and other openings, except vents, may be considered as "safe disposal" of the gas by the Marine Chemist.

225. INERTED, FOR FLAMMABLE COMPRESSED GAS: Means that individual pressure tanks with a working pressure of 50 pounds per square inch or over may be considered inerted when a positive pressure is maintained on the tanks by the flammable vapors remaining after the cargo has been discharged.

³See footnote on page 306-6.

SECTION 3.**310. Minimum Requirements Precedent to the Issuance of a Marine Chemist's Certificate — Applicable in All Cases.**

311. Before a Marine Chemist shall issue a certificate setting forth in writing that the contemplated repairs and alterations to a vessel can, in his judgment, be undertaken with safety he shall personally determine that the applicable minimum requirements have been complied with to his satisfaction.

312. When the Marine Chemist has satisfied himself that these minimum requirements and any other requirements, deemed by him to be necessary in order that the repairs and alterations can be undertaken with safety have been carried out, a Marine Chemist's certificate shall be issued by him setting forth in writing those facts. Such certificate shall be qualified as may be necessary and shall be prepared in form and manner prescribed by the National Fire Protection Association. (See page 306-16.) It shall include such requirements as may be deemed necessary by the Marine Chemist, to maintain insofar as can reasonably be done, the safe conditions in the spaces certified throughout the operation and shall include such additional tests and certifications as the Marine Chemist considers required. Such qualifications and requirements shall include precautions necessary to eliminate or minimize hazards that may be present from protective coatings or residues from cargoes.

313. It shall be the responsibility of the vessel repairer to retain the services of the Marine Chemist and to secure copies of his inspection certificate, and to provide the Master of the vessel and the representatives of the vessel owner with copies of such certificate. Throughout the course of repairs or alterations, safe conditions shall be maintained on the vessel by full observance of all qualifications and requirements listed by the Marine Chemist in the certificate.

320. Minimum Requirements Which Shall Prevail Prior to the Issuance of a Marine Chemist's Certificate Where a Safe Condition Is to Be Obtained Entirely By Cleaning.

321. All cargo heater coils shall have been steamed and blown. All cargo pumps, cargo lines, cargo smothering and vent lines shall have been flushed with water or blown with steam or air.

322. Compartments shall be so cleaned that the gas content by volume of the atmosphere in all cargo compartments and other spaces subject to gas accumulation (with the exception of bunker tanks containing fuel oil⁴) shall be within a permissible concentration.³

323. The residues in all cargo compartments and other spaces (with the exception of bunker tanks containing fuel oil⁴) shall not be capable, in the opinion of the Marine Chemist, of releasing gas which will raise the concentration in any such space above a permissible concentration.³

324. Satisfactory compliance with all the foregoing requirements shall be noted on the Marine Chemist's certificate.

330. Minimum Requirements Which Shall Prevail Prior to the Issuance of a Marine Chemist's Certificate Where a Safe Condition Is to Be Obtained by Both Cleaning and Inerting or Entirely by Inerting.

331. A Marine Chemist shall approve the use of the inerting procedure. Except where water is the inerting medium he shall be present continuously and actually supervise the control of the inerting medium and the hazards from the time the inerting medium is first taken aboard until the repairs and the safe disposal or securing of the inerting medium are complete. (Where gas inerting is being performed, a substitute for the Marine Chemist shall not be permitted as provided under other conditions in U. S. Coast Guard regulations.)

332. Only authorized persons and those actually necessary in connection with the repairs should be permitted on board the vessel from the time the inerting gas is taken aboard until the repairs and the safe disposal or securing of the inerting gas are completed.

333. All cargo heater coils, except those in the inerted spaces, shall have been steamed and blown. All cargo smothering and vent lines, except those in the inerted spaces, shall have been flushed with water, or blown with steam or air, or inerted. All valves to the inerted spaces shall have been closed and secured.

³See footnote on page 306-6.

⁴Note: If, however, the work involved is within or on the cargo compartment adjacent to fuel oil bunker boundaries, then the bunker tanks should be treated as deemed necessary by the Marine Chemist.

All cargo pumps and cargo lines shall have been flushed with water, or blown with steam or air, or inerted.

334. All spaces to be inerted shall be sufficiently intact to retain the inerting medium. All valves, hatches and other openings to the inerted spaces, except those controlling the inerting medium, are to be closed and secured.

335. Compartments or spaces in which internal repairs or alterations are to be undertaken shall be cleaned to comply with the requirements of paragraphs 320- and all other spaces (with the exception of bunker tanks containing fuel oil⁴) shall be inerted in accordance with the requirements of Section 2, paragraph 224.

336. Compartments or spaces on which external repairs or alterations are to be undertaken on the external boundaries (deck or shell) may be inerted by gas instead of being cleaned as described in paragraph 335, and all other spaces (with the exception of bunker tanks containing fuel oil⁴) shall be inerted, such inerting to be in accordance with the requirements of Section 2, paragraph 224.

337. Satisfactory compliance with all the foregoing requirements shall be noted on the Marine Chemist's certificate.

340. Minimum Requirements Which Shall Prevail Prior to the Issuance of a Marine Chemist's Certificate Where a Safe Condition Is to Be Obtained Entirely by Cleaning Certain Compartments and by Securing the Other Compartments.


341. All cargo heater coils to the spaces involved shall have been steamed and blown; all cargo smothering and vent lines to the spaces involved shall have been flushed with water or blown with steam or air; and the valves to all other compartments closed and secured. All cargo pumps and cargo lines shall have been flushed with water or blown with steam or air and the valves closed and secured.

342. Compartments or spaces in which internal repairs or alterations are to be undertaken and all adjacent compartments,

⁴See footnote on page 306-9.

including those diagonally adjacent thereto, shall be cleaned to comply with the applicable requirements of paragraphs 320- and all other compartments shall be closed and secured.

343. Satisfactory compliance with all the foregoing requirements shall be noted on the Marine Chemist's certificate.

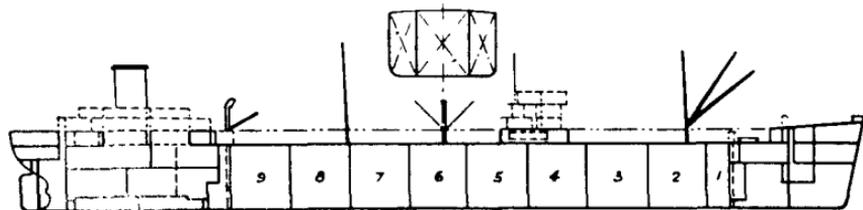


Paragraphs 320 — Safe Condition Obtained Entirely by Cleaning in a Repair Yard.



Paragraphs 330 — Safe Condition Obtained by Cleaning and Inerting in a Repair Yard.



Paragraphs 340 — Safe Condition Obtained by Cleaning and Securing Not in a Repair Yard.

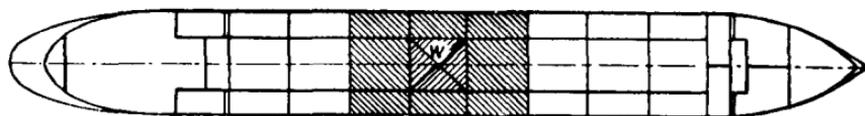

Paragraphs 350 — Safe Condition Obtained by Cleaning, Inerting and Securing Not in a Repair Yard.

Key: /// /// - Clean; \\\ \\\ - Inert; W-Work.

350. Minimum Requirements Which Shall Prevail Prior to the Issuance of a Marine Chemist's Certificate Where a Safe Condition Is to Be Obtained by Both Cleaning and Inerting or Entirely by Inerting Certain Compartments and by Securing the Other Compartments.

351. All cargo heater coils to the spaces involved, except those to the inerted spaces, shall have been steamed and blown; all cargo smothering and vent lines to the spaces involved, except those to the inerted spaces, shall have been flushed with water or blown with steam or air or inerted; and the valves to all other compartments closed and secured. All cargo pumps and cargo lines shall have been flushed with water, or blown with steam or air or inerted and the valves closed and secured.

352. Compartments or spaces in which internal repairs or alterations are to be undertaken shall be cleaned to comply with the requirements of paragraphs 320- and all adjacent compartments, including those diagonally adjacent thereto, shall be inerted to comply with the applicable requirements of paragraphs 330- and all other compartments shall be closed and secured.

353. Compartments or spaces on which external repairs or alterations are to be undertaken on the external boundaries (deck or shell) may be inerted by gas instead of being cleaned as described in paragraph 352, and all adjacent compartments, including those diagonally adjacent thereto, shall be inerted to comply with the applicable requirements of paragraphs 330- and all other spaces shall be closed and secured. Flooding with water may be used in lieu of gas inerting provided that the work is confined to the exterior shell at least three (3) feet below the water level and further provided that the gas content of the atmosphere above the water does not exceed one half of one per cent by volume in air, and if approved by a Marine Chemist.

354. Satisfactory compliance with all the foregoing requirements shall be noted on the Marine Chemist's certificate.

SECTION 4.**410. Exemptions from the Requirements of Section 1 for Vessels Entering a Repair Yard.**

411. Vessels which enter the repair yard for examination, either afloat or in drydock, provided, that all bulk cargo compartments and cofferdams are kept closed.

412. Vessels which enter the repair yard for scraping, washing down and painting afloat or in drydock, provided, that all bulk cargo compartments and cofferdams are kept closed.

413. Vessels which enter the repair yard for work (hot or cold) to be performed outside of the vessel, either afloat or in drydock, on the propeller, tailshaft or rudder (except hollow rudders in which case a Marine Chemist's certificate shall be required for the rudder) or for work to be performed off the vessel such as on the anchors or chains, provided, that all bulk cargo compartments and cofferdams are kept closed.

414. Vessels which enter the repair yard for work, either afloat or in drydock, within boiler and machinery spaces, and at other locations remote from the cargo compartments but not less than twenty-five (25) feet from the nearest cargo compartment which has not been cleaned or inerted to meet the appropriate designation requirements of Section 2, paragraphs 220-; provided, that where hot work is to be undertaken a Marine Chemist's certificate shall be required and this certificate shall set forth each specific location for which such work is approved, and further provided, that all bulk cargo compartments and cofferdams are kept closed.

415. Vessels which proceed to a special berth selected and set apart in the repair yard for a degassing, cleaning and inerting berth with due regard to the hazards of the location and to hazards to adjacent property.

416. The degassing, cleaning and inerting of vessels at such special berths shall be carried out in accordance with the requirements of Section 3, paragraphs 320- or 330- before they are shifted to other berths. No repairs involving hot work shall be undertaken on any vessel in such special berth until it has been degassed and cleaned or inerted in accordance with the requirements of Section 3, paragraphs 320- or 330- nor shall such repairs be then undertaken if another vessel or vessels, which have not complied with these requirements, are in the special berth at the same time.

417. A Marine Chemist's certificate shall be obtained before shifting a vessel to another berth from the special berth, or before undertaking the repair work at the special berth.

418. Vessels which proceed to a drydock or special berth selected and set apart with due regard to the hazards of the location and to hazards to adjacent property may undergo specific limited repair of a local nature when the compartments or spaces involved and the adjacent compartments or spaces are prepared in accordance with the provisions in Section 3, paragraphs 340- or paragraphs 350-. Not more than one vessel shall be located at each special berth. A Marine Chemist's certificate shall be obtained before undertaking such repairs.

SECTION 5.

500. Standard for Certifying Cargo Tanks Which Have Been Used for Carrying Chemicals in Bulk.

510. Scope. The standard set forth in this Section describes the conditions required before making repairs in spaces used for carrying chemicals in bulk, it being understood that the remaining spaces in the vessel comply with the applicable provisions of paragraphs 111, 112 and 113.

520. STANDARD DEFINITIONS — CHEMICAL. For the purpose of these requirements a chemical is any compound, mixture or solution in the form of a solid, liquid or gas, which may be hazardous by virtue of its properties or by virtue of the properties of compounds which might be evolved from hot work or cold work.

530. STANDARD SAFETY DESIGNATIONS:

- a. The standard safety designations set forth in paragraphs 221 and 222 may be used, provided that in the judgment of the Marine Chemist, the gas or vapor content in the compartments or spaces is within a permissible concentration for exposures not exceeding a total of 8 hours per day.³
- b. Where applicable, standard safety designations of paragraph 223 may be used.

³See footnote on page 306-6.