

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

REV.
D

AS1638

FEDERAL SUPPLY CLASS
4720

RATIONALE

AS1638D HAS BEEN REAFFIRMED TO COMPLY WITH THE SAE FIVE-YEAR REVIEW POLICY.

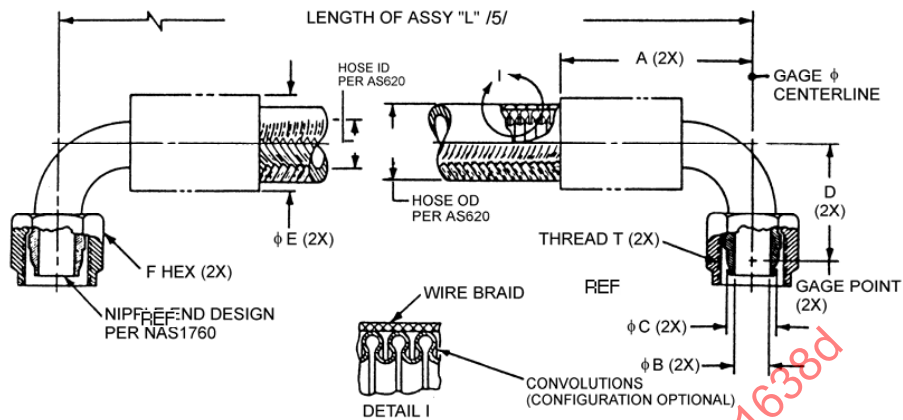


FIGURE 1 - HOSE ASSEMBLY

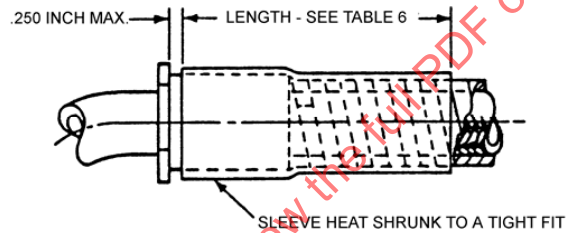


FIGURE 2 - SPIRAL AND POLYESTER ABRASION COVER /6/, /7/


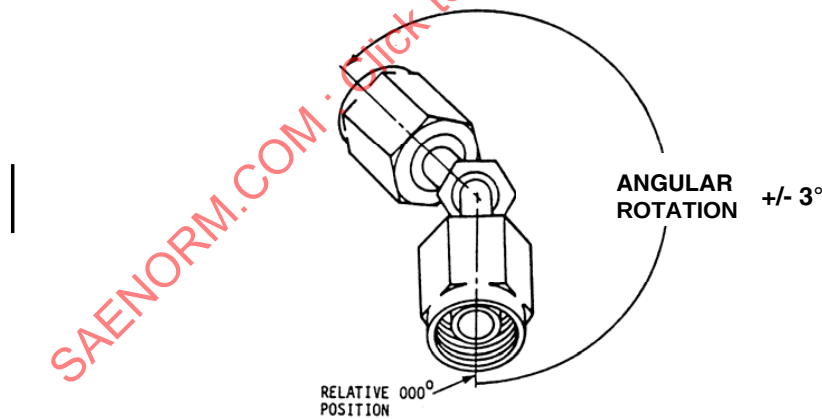


FIGURE 3 - FITTING ANGULAR ORIENTATION /15/

SAE values your input. To provide feedback on this Technical Report, please visit <http://www.sae.org/technical/standards/AS1638D>

THIRD ANGLE PROJECTION



CUSTODIAN: G-3/G-3D

PROCUREMENT SPECIFICATION: AS620 /2/



AEROSPACE STANDARD

HOSE ASSEMBLY, CONVOLUTED,
POLYTETRAFLUOROETHYLENE, METALLIC REINFORCED
CONDUCTIVE, FLARELESS, 90° TO 90°

AS1638
SHEET 1 OF 5

REV.
D

TABLE 1 - ASSEMBLY DIMENSIONS

HOSE ASSEMBLY AS1638 SIZE CODE	HOSE ASSEMBLY SIZE REF	THREAD T PER AS8879 REF	A MAX	ØB GAGE BASIC	ØC /8/ MIN	D MIN	D MAX	ØE /9/ MAX WITHOUT SLEEVEING	F HEX REF
E	.250	.4375-20 UNJF-3B	1.36	.2930	.132	.709	.779	.55	.56
G	.375	.5625-18 UNJF-3B	1.63	.4120	.256	.961	1.031	.68	.69
H	.500	.7500-16 UNJF-3B	1.85	.5600	.345	1.115	1.185	.86	.88
J	.625	.8750-14 UNJF-3B	2.20	.6730	.430	1.377	1.447	.95	1.00
K	.750	1.0625-12 UNJ -3B	2.67	.8100	.635	1.447	1.517	1.28	1.25
M	1.000	1.3125-12 UNJ -3B	3.03	1.0620	.835	1.880	1.950	1.47	1.50
N	1.250	1.6250-12 UNJ -3B	3.89	1.3160	1.085	2.183	2.253	1.70	1.81
P	1.500	1.8750-12 UNJ -3B	4.15	1.5650	1.310	2.653	2.723	2.00	2.12
R	2.000	2.5000-12 UNJ -3B	4.96	2.0680	1.780	2.980	3.050	2.56	2.75

TABLE 2 - ASSEMBLY LENGTH TOLERANCE

+.250/- .125 in FOR LENGTHS UNDER 18 in
 +.500/- .250 in FOR LENGTHS FROM 18 to 36 in EXL.
 +1.000/- .500 in FOR LENGTHS FROM 36 to 50 in EXL.
 +2%/-1% FOR LENGTHS 50 in AND OVER

TABLE 3 - HOSE OR COVER OUTSIDE DIAMETER

		HOSE SIZE									UPPER TEMP. LIMIT °F
COVER CODE	HOSE OR TYPE OF PROTECTIVE COVER	.250	.375	.500	.625	.750	1.00	1.25	1.50	2.00	
—	HOSE ONLY PER AS620	.413/.477	.523/.587	.723/.787	.818/.882	1.028/1.092	1.266/1.330	1.494/1.558	1.758/1.822	2.293/2.357	—
B REF	SPIRAL ABRASION /7/	.505	.615	.825	.935	1.140	1.358	1.630	1.890	2.395	275
H	INTEGRAL FIRESLEEVE /11/	.710/.760	.798/.862	.978/1.055	1.100/1.202	1.300/1.392	1.478/1.610	1.718/1.840	1.968/2.120	2.480/2.564	400
N REF	FIRESLEEVE SIL/FG (AS1072)	.900	1.030	1.150	1.380	1.590	1.800	2.060	2.320	2.740	400
K	INTEGRAL ABRASION /8/ (BRAIDED) POLYESTER	.468/.532	.598/.662	.808/.872	.888/.952	1.103/1.167	1.313/1.405	1.568/1.632	1.838/1.902	2.370/2.452	300
J	INTEGRAL FIRESLEEVE /14/	.653/.717	.763/.827	.963/1.027	1.058/1.122	1.268/1.332	1.498/1.562	—	—	2.480/2.564	400

TABLE 4 - HOSE ASSEMBLIES PHYSICAL CHARACTERISTICS

HOSE SIZE REF	OPERATING PRESSURE	PROOF PRESSURE	BURST PRESSURES ROOM TEMP	BURST PRESSURES HIGH TEMP	BEND RADIUS AT INSIDE OF BEND INCHES (HOSE ONLY)
	MAX PSI	MIN PSI	MIN PSI	MIN PSI	
E	1000	2000	4000	2800	1.25
G	1000	2000	4000	2800	2.25
H	1000	2000	4000	2800	2.88
J	1000	1800	3600	2500	3.00
K	1000	1800	3600	2500	3.75
M	1000	1800	3600	2500	5.00
N	1000	1800	3600	2500	6.25
P	750	1500	3000	2100	7.50
R	250	500	1000	700	10.00



AEROSPACE STANDARD

HOSE ASSEMBLY, CONVOLUTED,
POLYTETRAFLUOROETHYLENE, METALLIC REINFORCED
NONCONDUCTIVE, FLARELESS, 90° TO 90°

AS1638
SHEET 2 OF 5

**REV.
D**

TABLE 5 - WEIGHTS (NOM)

HOSE SIZE REF	HOSE ONLY LB/IN	HOSE WITH SPIRAL ABRASION COVER CODE B LB/IN	HOSE WITH INTEGRAL FIRESLEEVE COVER CODE H & J LB/IN	HOSE WITH TUBULAR FIRESLEEVE COVER CODE N LB/IN	HOSE WITH POLYESTER ABRASION COVER CODE K LB/IN	90° END FITTING LB EACH
E	.010	.011	—	.018	.009	.07
G	.010	.014	.028	.021	.012	.12
H	.022	.020	.032	.030	.018	.20
J	.020	.025	.042	.035	.022	.31
K	.027	.032	.050	.044	.028	.45
M	.040	.039	.055	.057	.038	.74
N	.055	.060	.070	.077	.045	1.20
P	.060	.071	.082	.107	.058	1.74
R	.090	.105	.129	.142	.100	2.39

TABLE 6 - SLEEVE LENGTH

HOSE SIZE	LENGTH (INCHES)
E G	2.00 ± .25
H J	2.50 ± .25
K M	3.00 ± .25
N P	3.50 ± .25
R	4.00 ± .25

TABLE 7 - MINIMUM INSPECTION BALL SIZE
FOR VERIFYING HOSE ASSEMBLY ID /8/

HOSE SIZE REF	DIA IN
E	.112
G	.218
H	.293
J	.366
K	.540
M	.710
N	.922
P	1.114
R	1.513

**AEROSPACE STANDARD**

HOSE ASSEMBLY, CONVOLUTED,
POLYTETRAFLUOROETHYLENE, METALLIC REINFORCED
NONCONDUCTIVE, FLARELESS, 90° TO 90°

AS1638
SHEET 3 OF 5

**REV.
D**

NOTES:

1. MATERIALS: HOSE AND FITTINGS PER AS620, TYPE II, CLASS 1 OR 2, AS SPECIFIED BY PART NUMBER.
CODE B, SPIRAL ABRASION COVER, BLACK NYLON COIL PER AS1294
CODE H AND J, INTEGRAL FIRESLEEVE, RED OR BROWN SILICONE
CODE N, TUBULAR FIRESLEEVE, FIBERGLASS SILICONE PER AS1072
CODE K, INTEGRAL ABRASION SLEEVE, BRAIDED POLYESTER
- /2/ PRODUCT SUPPLIED TO THIS SPECIFICATION SHALL BE ASSEMBLED BY AN ACCREDITED MANUFACTURER OR ASSEMBLING DISTRIBUTOR LISTED IN THE PERFORMANCE REVIEW INSTITUTE (PRI) QUALIFIED PRODUCTS LIST FOR PRI-QPL-AS620 FOR THIS STANDARD. SEE <http://www.pri.sae.org/QPL/as620.pdf> FOR CURRENT QPL ONLINE. NOTE THAT MANUFACTURERS AND ASSEMBLING DISTRIBUTORS ARE ACCREDITED BY PART NUMBER, SIZE AND MATERIAL ON THE PRI-QPL-AS620.
3. MARKING SHALL BE PER AS620 ON A STAINLESS STEEL BAND NOT OVER 1.0 in WIDE OR ON THE END FITTING COLLAR. THE CHARACTERS SHALL BE A MINIMUM OF .06 in HIGH. THE BAND SHALL BE SO DESIGNED AS TO REMAIN TIGHT ON THE HOSE TO PREVENT RELATIVE MOTION AND CHAFING. IT SHALL BE OF SUFFICIENT STRENGTH TO PREVENT REMOVAL BY HAND.
4. CONSTRUCTION AND PERFORMANCE PER AS620. FITTINGS SHALL BE PERMANENTLY ATTACHED TO HOSE.
- /5/ LENGTH "L" IS A THREE DIGIT NUMBER OF WHICH THE FIRST TWO DIGITS DESCRIBE THE HOSE ASSEMBLY LENGTH IN WHOLE INCHES, AND THE THIRD DIGIT, THE FRACTION OF AN INCH IN EIGHTHS. LENGTH "L" IS MEASURED FROM "GAGE POINT" TO "GAGE POINT." SEE TABLE 2 FOR LENGTH TOLERANCES.
- /6/ SPIRAL ABRASION COVER WHEN ASSEMBLED IN THE STRAIGHT CONDITION ON THE HOSE, SHALL HAVE AN AVERAGE GAP BETWEEN SPIRALS NOT EXCEEDING .05 in. DISPLACEMENT OF THE SPIRAL COVER, CAUSING A GREATER GAP, SHALL NOT BE CAUSE FOR REJECTION IF THE SPIRALS CAN BE REPOSITIONED TO MEET THE GAP REQUIREMENT. ENDS OF THE SPIRAL COVER SHALL BE TERMINATED WITH A LENGTH OF AMS-DTL-23053/5 BLACK POLYOLEFIN TUBING PER TABLE 6 AND FIGURE 2.
- /7/ BRAIDED POLYESTER ABRASION COVER SHALL FORM AN INTEGRAL, PERMANENT PART OF THE HOSE AND SHALL TERMINATE A MAXIMUM OF .625 in FROM THE END OF THE END FITTING COLLAR. ENDS OF POLYESTER ABRASION COVER MAY BE TERMINATED WITH A LENGTH OF AMS-DTL-23053/11 (FEP) CLASS 1 OR 2, COLOR CLEAR, PER TABLE 6 AND FIGURE 2.
- /8/ HOSE ASSEMBLY INSIDE DIAMETER SHALL BE VERIFIED BY PASSING THE DESIGNATED, OR LARGER, SPHERICAL BALL PER TABLE 7 THROUGH THE HOSE ASSEMBLY.
- /9/ DISTANCE ACROSS CORNERS OF COUPLING NUT, NIPPLE HEX OR SOCKET HEX MAY EXCEED THIS DIMENSION.
- /10/ ADD "AS1055 TYPE IIb CLASS B-S/P" OR "AS150 TYPE IIIbB" TO IDENTIFICATION MARKING TO SHOW LEVEL OF COMPLIANCE, "FIRE-PROOF" (15 min), WITH AS1055 OR AS150.
- /11/ THE CUT ENDS OF THE FIRESLEEVE SHALL BE COATED WITH RTV SILICONE RUBBER, OR EQUIVALENT, PRIOR TO INSTALLATION, TO PREVENT WICKING OF FLUIDS. THE FIRESLEEVE ENDS SHALL BE SECURED TO THE HOSE ASSEMBLY END FITTINGS WITH CORROSION RESISTANT STEEL BANDS. AFTER INSTALLATION, CRACKS OR VOIDS IN THE FIRESLEEVE, WHICH EXPOSE THE FIBERGLASS, SHALL BE COATED WITH RTV SILICONE RUBBER.
- /12/ THE TABLE 3 SLEEVE DIAMETERS ARE THE AS1072 MAXIMUM FOR THE LARGEST SIZE FIRESLEEVE AS QUALIFIED BY THE VARIOUS HOSE ASSEMBLY MANUFACTURERS. THE SLEEVE MAY STRETCH OVER A FITTING, OR WRINKLE OVER THE HOSE DUE TO SLEEVE LENGTH TO ALLOW HOSE BENDING. THE SLEEVE MAY BE COMPRESSED OVER THE HOSE FOR MEASUREMENT OR CLAMPING. IN THIS CASE A WRINKLE MAY OCCUR OVER APPROXIMATELY 10% OF THE SLEEVE CIRCUMFERENCE.
- /13/ ADD "AS1055 TYPE IIa CLASS A-S/P" OR "AS150 TYPE IIIaA" TO IDENTIFICATION MARKING TO SHOW LEVEL OF COMPLIANCE, "FIRE RESISTANT" (5 min), WITH AS1055 OR AS150.

	AEROSPACE STANDARD		AS1638 SHEET 4 OF 5	REV. D
	HOSE ASSEMBLY, CONVOLUTED, POLYTETRAFLUOROETHYLENE, METALLIC REINFORCED 0CONDUCTIVE, FLARELESS, 90° TO 90°			