


REV.
A

SAE AS3234

FEDERAL SUPPLY CLASS
5306


RATIONALE

ADD NEW PART NUMBERS AS3234-04 THRU -13, UPDATE THREAD SPECIFICATION TO AS8879, ADD EXCEPTION TO EDGE DISTANCE REQUIREMENTS FOR HEAD MARKING, UPDATE DIMENSIONING AND TOLERANCING TO ANSI Y14.5M-1982, UPDATE THREAD RUNOUT TO AS3062, REMOVE METRIC DIMENSIONS AND REFERENCES, REFORMAT TABLE 1, UPDATE SURFACE TEXTURE NOTE, DELETE FPI NOTE (DUPLICATES AS7471 REQUIREMENT), AND REDRAW FIGURE 1, GENERAL REVISION AND EDITORIAL UPDATE.

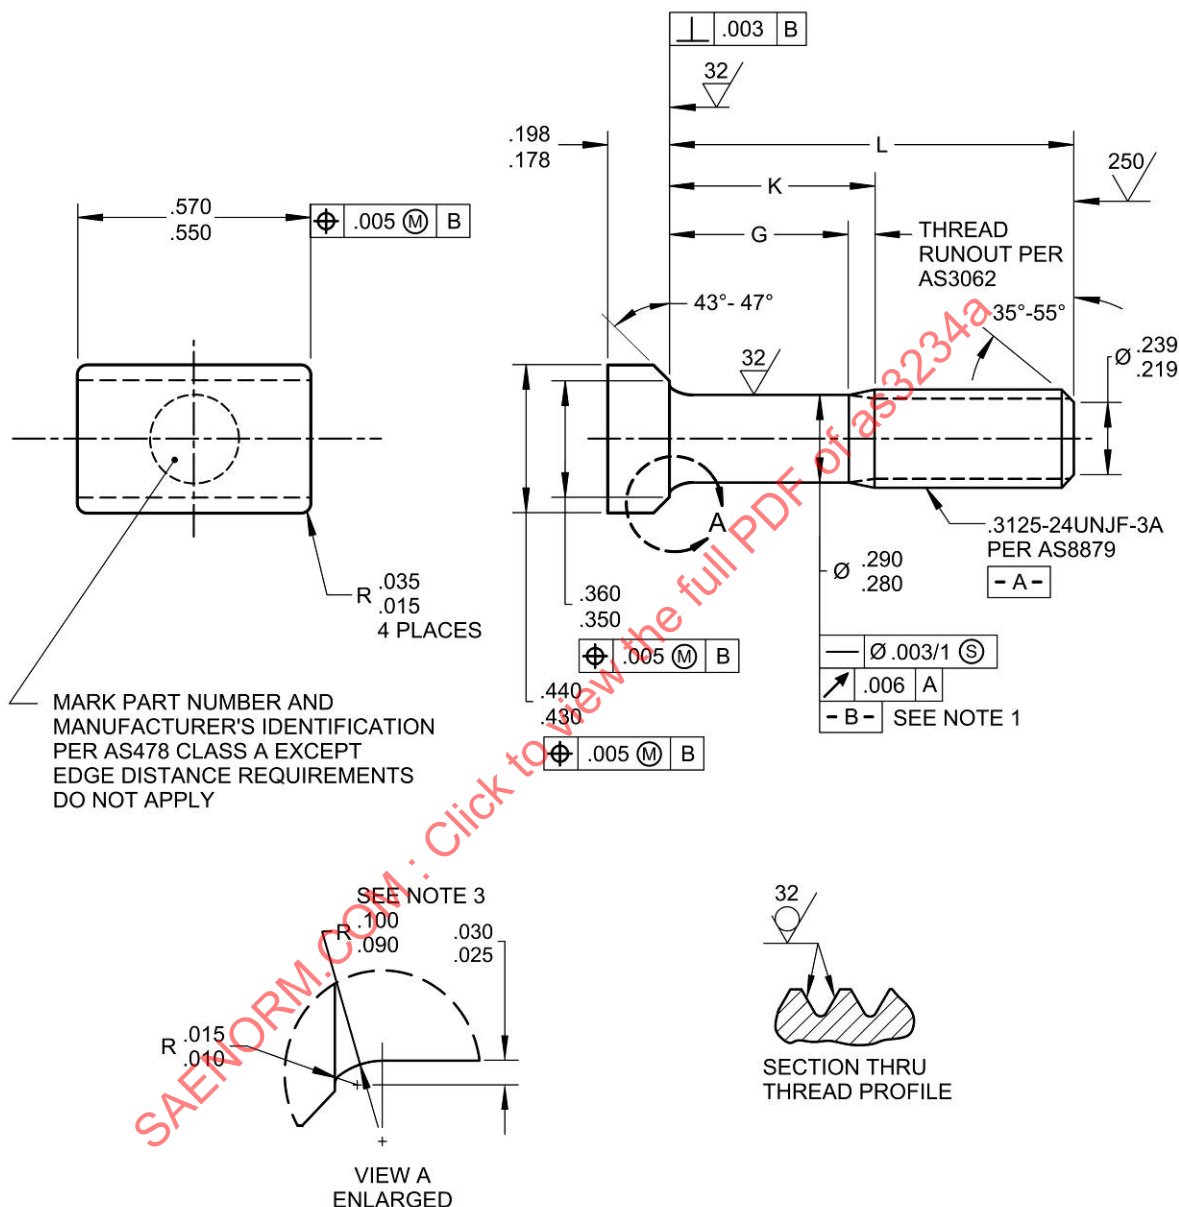

SAE values your input. To provide feedback on this Technical Report, please visit <http://www.sae.org/technical/standards/AS3234A>

THIRD ANGLE PROJECTION



CUSTODIAN: E-25

PROCUREMENT SPECIFICATION: AS7471 /3/

SAE Aerospace
An SAE International Group

AEROSPACE STANDARD

(R) BOLT, TEE HEAD - CHAMFERED, PD SHANK
NICKEL ALLOY (UNS N07001), 165 KSI MIN UTS
.3125-24 UNJF-3A

SAE AS3234
SHEET 1 OF 3

REV.
A

TABLE 1 - PART NUMBERS AND DIMENSIONS

PART NUMBER	L	G MIN	K MAX	APPROX MASS LB/100	PART NUMBER	L	G MIN	K MAX	APPROX MASS LB/100
AS3234-04	.490- .510	.063	.150	2.28	AS3234-34	2.740-2.760	1.732	1.875	6.41
AS3234-05	.552- .572	.063	.150	2.39	AS3234-35	2.865-2.885	1.857	2.000	6.64
AS3234-06	.615- .635	.063	.150	2.50	AS3234-36	2.990-3.010	1.982	2.125	6.87
AS3234-07	.678- .698	.063	.150	2.61	AS3234-37	3.115-3.135	2.107	2.250	7.11
AS3234-08	.740- .760	.063	.150	2.72	AS3234-38	3.240-3.260	2.232	2.375	7.34
AS3234-09	.802- .822	.063	.150	2.83	AS3234-39	3.365-3.385	2.357	2.500	7.57
AS3234-10	.865- .885	.063	.150	2.95	AS3234-40	3.490-3.510	2.482	2.625	7.81
AS3234-11	.928- .948	.063	.150	3.06	AS3234-41	3.615-3.635	2.607	2.750	8.03
AS3234-12	.990-1.010	.063	.150	3.17	AS3234-42	3.740-3.760	2.732	2.875	8.28
AS3234-13	1.052-1.072	.063	.150	3.29	AS3234-43	3.865-3.885	2.857	3.000	8.50
AS3234-14	1.115-1.135	.107	.250	3.39	AS3234-44	3.990-4.010	2.982	3.125	8.73
AS3234-15	1.178-1.198	.170	.312	3.50	AS3234-45	4.115-4.135	3.107	3.250	8.97
AS3234-16	1.240-1.260	.232	.375	3.62	AS3234-46	4.240-4.260	3.232	3.375	9.20
AS3234-17	1.302-1.322	.294	.438	3.74	AS3234-47	4.365-4.385	3.357	3.500	9.43
AS3234-18	1.365-1.385	.357	.500	3.85	AS3234-48	4.490-4.510	3.482	3.625	9.66
AS3234-19	1.428-1.448	.420	.562	3.97	AS3234-49	4.615-4.635	3.607	3.750	9.90
AS3234-20	1.490-1.510	.482	.625	4.09	AS3234-50	4.740-4.760	3.732	3.875	10.12
AS3234-21	1.552-1.572	.544	.688	4.20	AS3234-51	4.865-4.885	3.857	4.000	10.36
AS3234-22	1.615-1.635	.607	.750	4.32	AS3234-52	4.990-5.010	3.982	4.125	10.65
AS3234-23	1.678-1.698	.670	.812	4.43	AS3234-53	5.115-5.135	4.107	4.250	10.83
AS3234-24	1.740-1.760	.732	.875	4.55	AS3234-54	5.240-5.260	4.232	4.375	11.06
AS3234-25	1.802-1.822	.794	.938	4.67	AS3234-55	5.365-5.385	4.357	4.500	11.29
AS3234-26	1.865-1.885	.857	1.000	4.78	AS3234-56	5.490-5.510	4.482	4.625	11.53
AS3234-27	1.928-1.948	.920	1.062	4.90	AS3234-57	5.615-5.635	4.607	4.750	11.75
AS3234-28	1.990-2.010	.982	1.125	5.02	AS3234-58	5.740-5.760	4.732	4.875	11.99
AS3234-29	2.115-2.135	1.107	1.250	5.24	AS3234-59	5.865-5.885	4.857	5.000	12.22
AS3234-30	2.240-2.260	1.232	1.375	5.48	AS3234-60	5.990-6.010	4.982	5.125	12.45
AS3234-31	2.365-2.385	1.357	1.500	5.72					
AS3234-32	2.490-2.510	1.482	1.625	5.94					
AS3234-33	2.615-2.635	1.607	1.750	6.19					

NOTES:

- FOR PART NUMBERS AS3234-04 THRU AS3234-19 THE THREAD PD (DATUM A) SHALL REPLACE DATUM B.
- MATERIAL: CORROSION AND HEAT RESISTANT NICKEL ALLOY AMS5708 (UNS N07001).
- PROCUREMENT SPECIFICATION: AS7471 EXCEPT THE .090-.100 HEAD-TO-SHANK FILLET RADIUS SHALL NOT BE COLD WORKED.
- SURFACE TEXTURE: SYMBOLS PER ASME Y14.36M. REQUIREMENTS PER ASME B46.1-1978. UNLESS OTHERWISE SPECIFIED, SURFACES TO BE 125 MICROINCHES Ra EXCEPT UPSET HEAD.
- BREAK SHARP EDGES .003 TO .015 UNLESS OTHERWISE SPECIFIED.

 An SAE International Group	AEROSPACE STANDARD		 AS3234 SHEET 2 OF 3	REV. A
	(R) BOLT, TEE HEAD - CHAMFERED, PD SHANK NICKEL ALLOY (UNS N07001), 165 KSI MIN UTS .3125-24 UNJF-3A			