

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

AS85049/89

FEDERAL SUPPLY CLASS
5935

NOTICE


THIS DOCUMENT HAS BEEN TAKEN DIRECTLY FROM U.S. MILITARY SPECIFICATION MIL-C-85049/89, AMENDMENT 1, AND CONTAINS ONLY MINOR EDITORIAL AND FORMAT CHANGES REQUIRED TO BRING IT INTO CONFORMANCE WITH THE PUBLISHING REQUIREMENTS OF SAE TECHNICAL STANDARDS. THE INITIAL RELEASE OF THIS DOCUMENT IS INTENDED TO REPLACE MIL-C-85049/89, AMENDMENT 1. ANY PART NUMBERS ESTABLISHED BY THE ORIGINAL SPECIFICATION REMAIN UNCHANGED.

THE ORIGINAL MILITARY SPECIFICATION WAS ADOPTED AS AN SAE STANDARD UNDER THE PROVISIONS OF THE SAE TECHNICAL STANDARDS BOARD (TSB) RULES AND REGULATIONS (TSB 001) PERTAINING TO ACCELERATED ADOPTION OF GOVERNMENT SPECIFICATIONS AND STANDARDS. TSB RULES PROVIDE FOR (A) THE PUBLICATION OF PORTIONS OF UNREVISED GOVERNMENT SPECIFICATIONS AND STANDARDS WITHOUT CONSENSUS VOTING AT THE SAE COMMITTEE LEVEL, AND (B) THE USE OF THE EXISTING GOVERNMENT SPECIFICATION OR STANDARD FORMAT.

UNDER DEPARTMENT OF DEFENSE POLICIES AND PROCEDURES, ANY QUALIFICATION REQUIREMENTS AND ASSOCIATED QUALIFIED PRODUCTS LISTS ARE MANDATORY FOR DOD CONTRACTS. ANY REQUIREMENT RELATING TO QUALIFIED PRODUCTS LISTS (QPL'S) HAS NOT BEEN ADOPTED BY SAE AND IS NOT PART OF THIS SAE TECHNICAL DOCUMENT.

SAENORM.COM : Click to view the full PDF of as85049 - 89

THIRD ANGLE PROJECTION



ISSUED 2000-06

PREPARED BY SAE SUBCOMMITTEE AE-8C1


SAE The Engineering Society
For Advancing Mobility
INTERNATIONAL
Land Sea Air and Space®
400 Commonwealth Drive, Warrendale, PA 15096-0001

AEROSPACE STANDARD

CONNECTOR ACCESSORIES, ELECTRICAL, BACKSHELL,
45°, SELF-LOCKING, SHIELD BAND TERMINATION, (RFI/EMI),
SHRINK SLEEVE ACCOMMODATION, CATEGORY 3B
(FOR MIL-C-38999 SERIES III AND IV CONNECTORS)


AS85049/89
SHEET 1 OF 6

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) SPECIFIED IN THE SOLICITATION: MIL-C-85049.

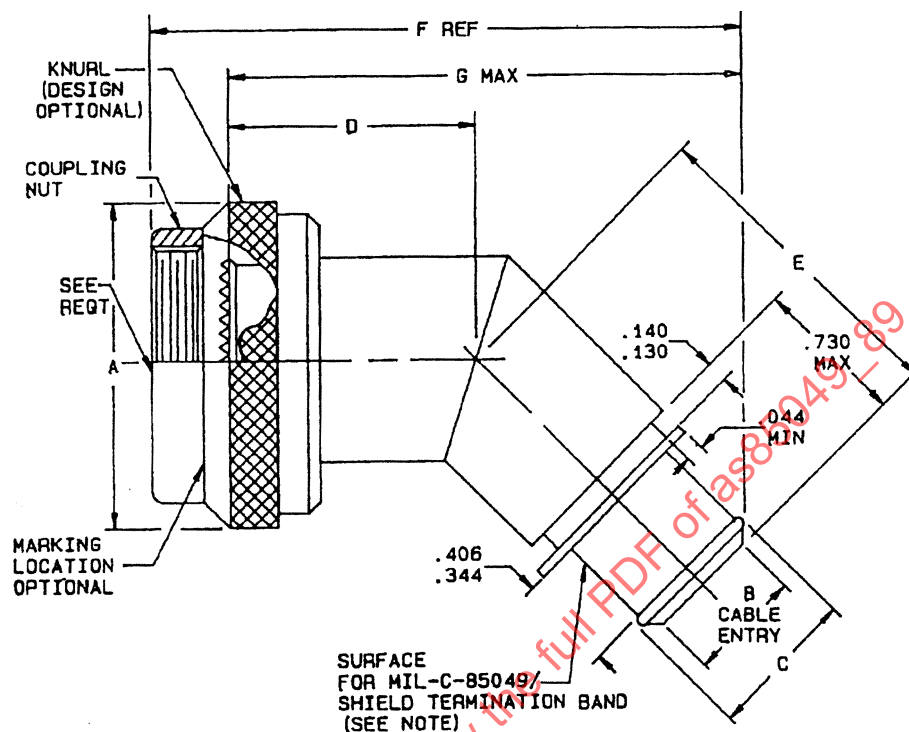

NOTE: Ribbed, internal knurl or surface roughness R_a 125-250 in accordance with ANSI B46.1. See figure 2 for selective plating details.

FIGURE 1. CONFIGURATION AND DIMENSIONS.

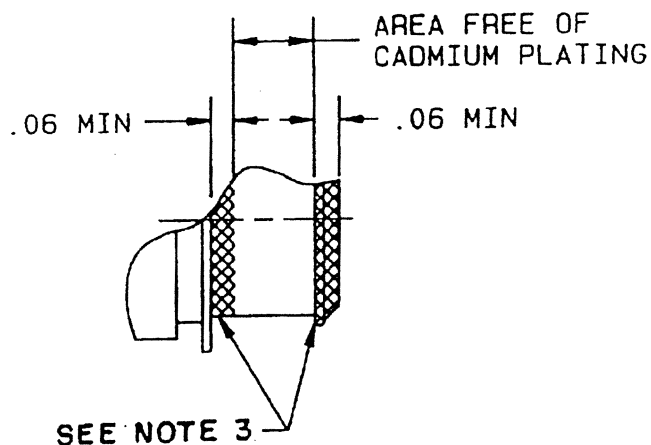

Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
.044	1.12	.500	12.70	.770	19.56	1.010	25.65	1.157	29.39	1.279	32.49
.060	1.52	.562	14.27	.812	20.62	1.030	26.16	1.160	29.46	1.300	33.02
.130	3.30	.583	14.81	.829	21.05	1.060	26.92	1.170	29.72	1.330	33.78
.140	3.56	.625	15.88	.858	21.79	1.080	27.43	1.190	30.23	1.350	34.29
.250	6.35	.645	16.38	.895	22.73	1.083	27.51	1.200	30.48	1.406	35.71
.312	7.92	.688	17.47	.938	23.83	1.110	28.19	1.210	30.73	1.516	38.51
.395	10.03	.707	17.96	.957	24.31	1.120	28.45	1.240	31.50	1.642	41.71
.438	11.13	.730	18.52	.984	24.99	1.145	29.08	1.260	32.00	1.768	44.91
.457	11.61	.750	19.05	1.000	25.40	1.150	29.21	1.270	32.26	1.889	47.98

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Cadmium/nickel interface shall be coated with polysulfide sealant.

FIGURE 2. SELECTIVE PLATING.

AEROSPACE STANDARD

CONNECTOR ACCESSORIES, ELECTRICAL, BACKSHELL,
45°, SELF-LOCKING, SHIELD BAND TERMINATION, (RFI/EMI),
SHRINK SLEEVE ACCOMMODATION, CATEGORY 3B
(FOR MIL-C-38999 SERIES III AND IV CONNECTORS)

AS85049/89

SHEET 3 OF 6

TABLE I. SHELL SIZE AND DIMENSIONS.

Accessory shell size	Shell size code (ref)	A max dia	B dia $\pm .010$ entry size		C dia ref		D max dim	E max dim	G max c dia		F ref c dia	
			02	03	02	03			02	03	02	03
9	A	.858	N/A	.250	N/A	.395	1.01	1.16	N/A	1.970	N/A	2.218
11	B	.984	N/A	.312	N/A	.457	1.03	1.19	N/A	2.033	N/A	2.281
13	C	1.157	.312	.438	.457	.583	1.06	1.21	2.077	2.122	2.325	2.370
15	D	1.279	.438	.562	.583	.707	1.08	1.24	2.163	2.207	2.411	2.455
17	E	1.406	.500	.625	.645	.770	1.11	1.26	2.229	2.273	2.477	2.521
19	F	1.516	.625	.750	.770	.895	1.12	1.27	2.290	2.334	2.538	2.528
21	G	1.642	.625	.812	.770	.957	1.15	1.30	2.341	2.408	2.589	2.656
23	H	1.768	.688	.938	.829	1.083	1.17	1.33	2.404	2.493	2.652	2.741
25	J	1.889	.750	1.000	.895	1.145	1.20	1.35	2.471	2.559	2.719	2.807

REQUIREMENTS:

Design and construction:

Dimensions and configuration: See figure 1 and table I.

Interface dimensions: Shall conform to MIL-C-85049.

Coupling nut: Shall be captivated to the adapter body and free to rotate.

Material and finish: In accordance with MIL-C-85049 and table II herein.