


SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

REV. A	FEDERAL SUPPLY CLASS 5330	
	THE INITIAL SAE PUBLICATION OF THIS DOCUMENT WAS TAKEN DIRECTLY FROM U.S. MILITARY STANDARD MS9205A(ASG), AMENDMENT 1. THIS SAE STANDARD RETAINS THE SAME PART NUMBERS ESTABLISHED BY THE ORIGINAL MILITARY DOCUMENT. ANY REQUIREMENTS ASSOCIATED WITH QUALIFIED PRODUCTS LISTS (QPL) MAY CONTINUE TO BE MANDATORY FOR DOD CONTRACTS. REQUIREMENTS RELATING TO QPL'S HAVE NOT BEEN ADOPTED BY THE SAE FOR THIS STANDARD AND ARE NOT PART OF THIS SAE DOCUMENT.	
AS9205	SAENORM.COM : Click to view the full PDF of as9205a	
THIRD ANGLE PROJECTION 		ISSUED 1998-11 REVISED 2001-07
PREPARED BY SAE COMMITTEE E-25, GENERAL STANDARDS FOR AEROSPACE PROPULSION SYSTEMS		
 SAE The Engineering Society For Advancing Mobility Land Sea Air and Space® 400 Commonwealth Drive, Warrendale, PA 15096-0001	AEROSPACE STANDARD (R) GASKET - METAL O-RING, .125 TUBE X .010 WALL, CRES - UNS S32100	AS9205 SHEET 1 OF 4
		REV. A

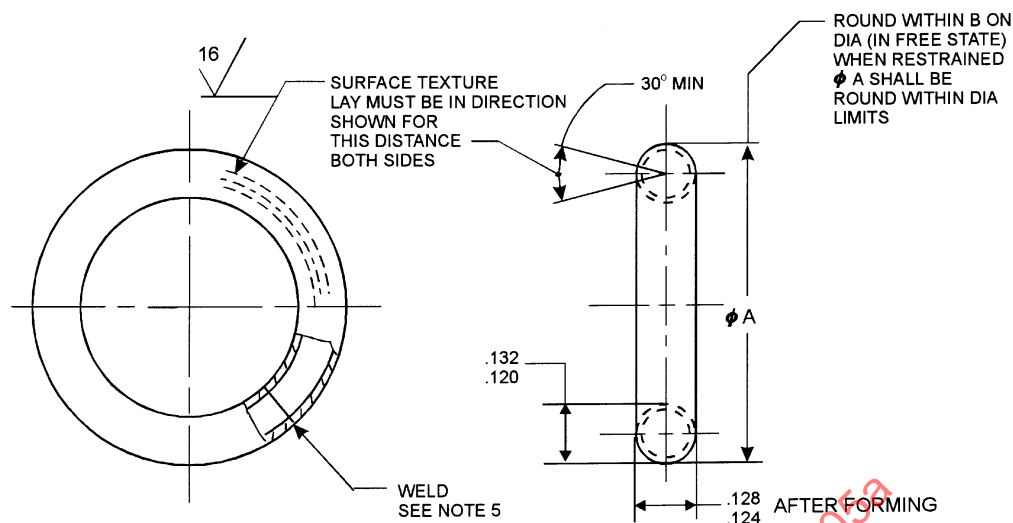


FIGURE 1

TABLE 1 - PART NUMBERS AND DIMENSIONS

PART NO.	A +.005 -.000	TOL B	APPROX. MASS LB/100	PART NO.	A +.005 -.000	TOL B	APPROX. MASS LB/100
* MS9205-010	2.000	.030	.640	MS9205-028	3.125	.060	1.000
MS9205-011	2.062	.030	.660	MS9205-029	3.188	.060	1.020
MS9205-012	2.125	.030	.680	MS9205-030	3.250	.060	1.040
MS9205-013	2.188	.030	.700	MS9205-031	3.312	.060	1.060
* MS9205-014	2.250	.030	.720	MS9205-032	3.375	.060	1.080
MS9205-015	2.312	.030	.740	MS9205-033	3.438	.060	1.100
MS9205-016	2.375	.030	.760	* MS9205-034	3.500	.060	1.120
MS9205-017	2.438	.030	.780	MS9205-035	3.562	.060	1.140
* MS9205-018	2.500	.030	.800	MS9205-036	3.625	.060	1.160
MS9205-019	2.562	.060	.820	MS9205-037	3.688	.060	1.180
MS9205-020	2.625	.060	.840	MS9205-038	3.750	.060	1.200
MS9205-021	2.688	.060	.860	MS9205-039	3.812	.060	1.220
* MS9205-022	2.750	.060	.880				
MS9205-023	2.812	.060	.900				
MS9205-024	2.875	.060	.920				
MS9205-025	2.938	.060	.940				
* MS9205-026	3.000	.060	.960				
MS9205-027	3.062	.060	.980				

REV.
A

AS9205

TABLE 1 - PART NUMBERS AND DIMENSIONS (CONTINUED)

PART NO.	A +.005 -.000	TOL B	APPROX. MASS LB/100	PART NO.	A +.005 -.000	TOL B	APPROX. MASS LB/100
MS9205-040	3.875	.060	1.240	MS9205-108	8.125	.090	2.600
MS9205-041	3.938	.060	1.260	MS9205-110	8.250	.090	2.640
*MS9205-042	4.000	.060	1.280	MS9205-112	8.375	.090	2.680
MS9205-043	4.062	.060	1.300	MS9205-114	8.500	.090	2.720
MS9205-044	4.125	.060	1.320	MS9205-116	8.625	.090	2.760
MS9205-045	4.188	.060	1.340	MS9202-118	8.750	.090	2.800
MS9205-046	4.250	.060	1.360	MS9205-120	8.875	.090	2.840
MS9205-047	4.312	.060	1.380	* MS9205-122	9.000	.090	2.880
MS9205-048	4.375	.060	1.400	MS9205-126	9.250	.090	2.960
MS9205-049	4.438	.060	1.420	MS9205-130	9.500	.090	3.040
*MS9205-050	4.500	.060	1.440	MS9205-134	9.750	.090	3.120
MS9205-051	4.562	.060	1.460	* MS9205-138	10.000	.090	3.200
MS9205-052	4.625	.060	1.480	MS9205-142	10.250	.125	3.280
MS9205-053	4.688	.060	1.500	MS9205-148	10.500	.125	3.360
MS9205-054	4.750	.060	1.520	MS9205-150	10.750	.125	3.440
MS9205-055	4.812	.060	1.540	* MS9205-154	11.000	.125	3.520
MS9205-056	4.875	.060	1.560	MS9205-156	11.250	.125	3.600
MS9205-057	4.938	.060	1.580	MS9205-162	11.500	.125	3.680
*MS9205-058	5.000	.060	1.600	MS9205-166	11.750	.125	3.760
MS9205-059	5.062	.090	1.620	*MS9205-170	12.000	.125	3.840
MS9205-060	5.125	.090	1.640	MS9205-174	12.250	.150	3.920
MS9205-061	5.188	.090	1.660	MS9205-178	12.500	.150	4.000
MS9205-062	5.250	.090	1.680	MS9205-182	12.750	.150	4.080
MS9205-063	5.312	.090	1.700	MS9205-186	13.000	.150	4.160
MS9205-064	5.375	.090	1.720	MS9205-190	13.250	.150	4.240
MS9205-065	5.438	.090	1.740	MS9205-194	13.500	.150	4.320
*MS9205-066	5.500	.090	1.760	MS9205-198	13.750	.150	4.400
MS9205-067	5.562	.090	1.780	* MS9205-202	14.000	.150	4.480
MS9205-068	5.625	.090	1.800	MS9205-206	14.250	.175	4.560
MS9205-069	5.688	.090	1.820	MS9205-210	14.500	.175	4.640
MS9205-070	5.750	.090	1.840	MS9205-214	14.750	.175	4.720
MS9205-071	5.812	.090	1.860	MS9205-218	15.000	.175	4.800
MS9205-072	5.875	.090	1.880	MS9205-222	15.250	.175	4.880
MS9205-073	5.938	.090	1.900	MS9205-226	15.500	.175	4.960
*MS9205-074	6.000	.090	1.920	MS9205-230	15.750	.175	5.040
MS9205-076	6.125	.090	1.960	* MS9205-234	16.000	.175	5.120
MS9205-078	6.250	.090	2.000	MS9205-238	16.250	.200	5.200
MS9205-080	6.375	.090	2.040	MS9205-242	16.500	.200	5.280
MS9205-082	6.500	.090	2.080	MS9205-246	16.750	.200	5.360
MS9205-084	6.625	.090	2.120	MS9205-250	17.000	.200	5.440
MS9205-086	6.750	.090	2.160	MS9205-254	17.250	.200	5.520
MS9205-088	6.875	.090	2.200	MS9205-258	17.500	.200	5.600
*MS9205-090	7.000	.090	2.240	MS9205-262	17.750	.200	5.680
MS9205-092	7.125	.090	2.280	*MS9205-266	18.000	.200	5.760
MS9205-094	7.250	.090	2.320	MS9205-270	18.250	.200	5.840
MS9205-096	7.375	.090	2.360	MS9205-274	18.500	.200	5.920
MS9205-098	7.500	.090	2.400	MS9205-278	18.750	.200	6.000
MS9205-100	7.625	.090	2.440	MS9205-282	19.000	.200	6.080
MS9205-102	7.750	.090	2.480	MS9205-286	19.250	.250	6.160
MS9205-104	7.875	.090	2.520	MS9205-290	19.500	.250	6.240
*MS9205-106	8.000	.090	2.560	MS9205-294	19.750	.250	6.320

AEROSPACE STANDARD

(R)

GASKET - METAL O-RING,
.125 TUBE X .010 WALL, CRES -
UNS S32100

AS9205
SHEET 3 OF 4

REV.
A