

AS9565

## ADOPTION NOTICE

AS9565, "BOLT, MACHINE-DOUBLE HEXAGON, EXTENDED WASHER HEAD, DRILLED, PD SHANK, AMS 5731, .190-32 UNJF-3A", was adopted on 15 OCTOBER 1999 for use by the Department of Defense (DoD). Proposed changes by DoD Activities must be submitted to the DoD Adopting Activity: Defense Industrial Supply Center, ATTN: DISC-AESD, 700 Robbins Avenue, Philadelphia, PA 19111-5096. DoD Activities may obtain copies of this standard from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094. The private sector and other Government agencies may purchase copies from the SOCIETY OF AUTOMOTIVE ENGINEERS, INC., 400 COMMONWEALTH DRIVE, WARRENDALE, PA 15096.

## Custodians:

Army - AV  
 Navy - AS  
 Air Force - 99  
 DLA-IS

## Adopting activity:

DLA-IS  
 (Project 5306-2215)

AMSC N/A

FSC 5306

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

NOTICE

THIS DOCUMENT HAS BEEN TAKEN DIRECTLY FROM U.S. MILITARY SPECIFICATION MS9565A, AMENDMENT 1, NOTICE 1 AND CONTAINS ONLY MINOR EDITORIAL AND FORMAT CHANGES REQUIRED TO BRING IT INTO CONFORMANCE WITH THE PUBLISHING REQUIREMENTS OF SAE TECHNICAL STANDARDS. THE INITIAL RELEASE OF THIS DOCUMENT IS INTENDED TO REPLACE MS9565A, AMENDMENT 1, NOTICE 1. ANY PART NUMBERS ESTABLISHED BY THE ORIGINAL SPECIFICATION REMAIN UNCHANGED.

THE ORIGINAL MILITARY SPECIFICATION WAS ADOPTED AS AN SAE STANDARD UNDER THE PROVISIONS OF THE SAE TECHNICAL STANDARDS BOARD (TSB) RULES AND REGULATIONS (TSB 001) PERTAINING TO ACCELERATED ADOPTION OF GOVERNMENT SPECIFICATIONS AND STANDARDS. TSB RULES PROVIDE FOR (A) THE PUBLICATION OF PORTIONS OF UNREVISED GOVERNMENT SPECIFICATIONS AND STANDARDS WITHOUT CONSENSUS VOTING AT THE SAE COMMITTEE LEVEL, AND (B) THE USE OF THE EXISTING GOVERNMENT SPECIFICATION OR STANDARD FORMAT.


UNDER DEPARTMENT OF DEFENSE POLICIES AND PROCEDURES, ANY QUALIFICATION REQUIREMENTS AND ASSOCIATED QUALIFIED PRODUCTS LISTS ARE MANDATORY FOR DOD CONTRACTS. ANY REQUIREMENT RELATING TO QUALIFIED PRODUCTS LISTS (QPL'S) HAS NOT BEEN ADOPTED BY SAE AND IS NOT PART OF THIS SAE TECHNICAL DOCUMENT.

AS9565

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

SAENORM.COM : Click to view the full PDF of as9565

THIRD ANGLE PROJECTION



ISSUED 1999-08

PREPARED BY SAE COMMITTEE E-25

PROCUREMENT SPECIFICATION: NONE



**AEROSPACE STANDARD**

BOLT, MACHINE - DOUBLE HEXAGON EXTENDED  
WASHER HEAD, DRILLED, PD SHANK,  
AMS5731, .190-32 UNJF-3A

**AS9565**  
SHEET 1 OF 3

Copyright 1999 Society of Automotive Engineers, Inc.  
All rights reserved.

Printed in the U.S.A.

QUESTIONS REGARDING THIS DOCUMENT: (724) 772-8510  
TO PLACE A DOCUMENT ORDER: (724) 776-4970

FAX: (724) 776-0040  
FAX: (24) 776-0790

SAE WEB ADDRESS: <http://www.sae.org>

AS9565

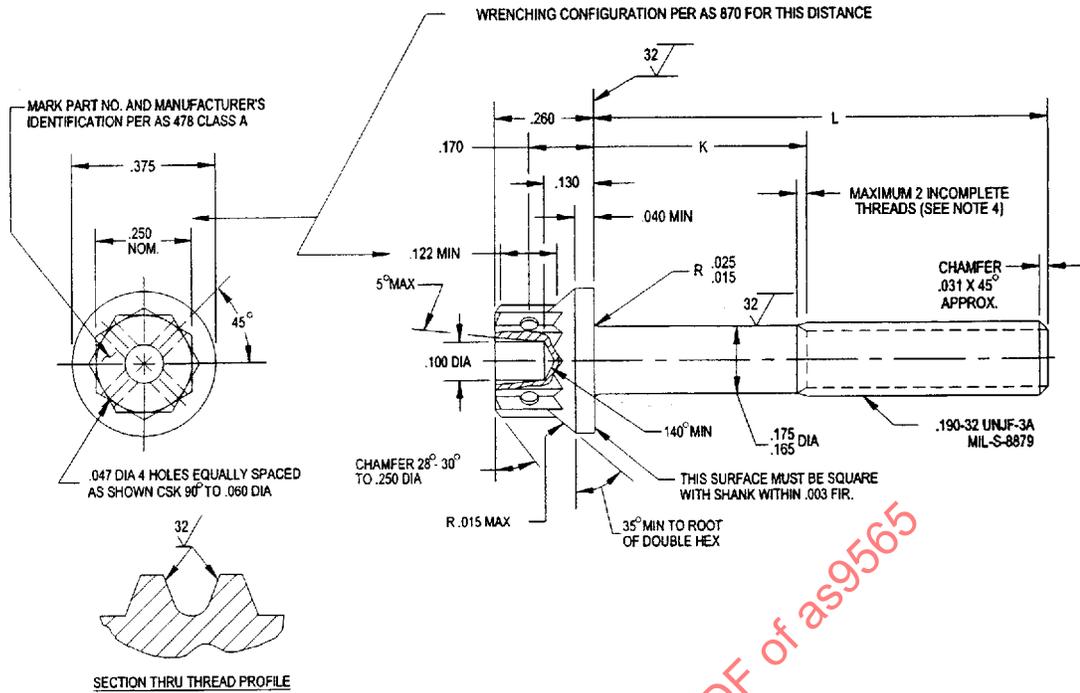


FIGURE 1 - BOLT

TABLE I - PART NUMBERS AND DIMENSIONS

PART NO.	L	K	APPROX WEIGHT LB/100	PART NO.	L	K	APPROX WEIGHT LB/100
MS9565-03	.312	.072-.092	.87	MS9565-16	1.125	.435-.495	1.39
MS9565-04	.375	.072-.092	.91	MS9565-17	1.188	.498-.558	1.43
MS9565-05	.438	.072-.092	.95	MS9565-18	1.250	.560-.620	1.47
MS9565-06	.500	.072-.092	.99	MS9565-19	1.312	.622-.682	1.51
MS9565-07	.562	.072-.092	1.03	MS9565-20	1.375	.685-.745	1.55
MS9565-08	.625	.072-.092	1.07	MS9565-21	1.438	.748-.808	1.59
MS9565-09	.688	.072-.092	1.11	MS9565-22	1.500	.810-.870	1.63
MS9565-10	.750	.072-.120	1.15	MS9565-23	1.562	.872-.932	1.67
MS9565-11	.812	.122-.182	1.19	MS9565-24	1.625	.935-.995	1.71
MS9565-12	.875	.185-.245	1.23	MS9565-25	1.688	.998-1.058	1.75
MS9565-13	.938	.248-.308	1.27	MS9565-26	1.750	1.060-1.120	1.79
MS9565-14	1.000	.310-.370	1.31	MS9565-27	1.875	1.185-1.245	1.87
MS9565-15	1.062	.372-.432	1.35				