



SURFACE VEHICLE RECOMMENDED PRACTICE

SAE J133

REV.
OCT2003

Issued 1970-03

Revised 2003-10

Superseding J133 OCT2002

(R) Fifth Wheel Kingpin Performance—Commercial Trailers and Semitrailers

1. Scope

The purpose of this SAE Recommended Practice is to establish test procedures and minimum performance standards for kingpins and their supporting structure manufactured to SAE specifications. The dimensions shown in SAE J700 will permit the establishment of standard clearances in the installed condition which, in turn, will permit fifth wheel manufacturers to design their products to establish interchangeability with any kingpin made and installed to the SAE specification.

2. References

2.1 Applicable Publication

The following publications form a part of the specification to the extent specified herein. Unless otherwise indicated, the latest revision of SAE publications shall apply

2.1.1 SAE PUBLICATION

Available from SAE, 400 Commonwealth Drive, Warrendale, PA 15096-0001.
SAE J700—Upper Coupler Kingpin—Commercial Trailers and Semitrailers

2.1.2 OTHER PUBLICATIONS

Association of American Railroads M931

3. Definitions

GVW = Gross Vehicle (Trailer) Weight, including payload and vehicle (trailer) weight. TVW = Total Weight of Towed Vehicles (Trailers).

The kingpin, when completely installed, shall fit within the tolerances and dimensions shown in SAE J700.

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising there from, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

Copyright © 2003 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)

Tel: 724-776-4970 (outside USA)

Fax: 724-776-0790

Email: custsvc@sae.org

<http://www.sae.org>

SAE WEB ADDRESS:

The kingpin, when installed, shall meet the following performance requirements:

- (a) Withstand a force "A" of 1.15 TVW in a fore or aft direction. (See Figure 1.)
- (b) Withstand a cycling force "B" of 0.4 TVW in a fore and aft direction for 500 000 cycles. (See Figure 1.)
- (c) Withstand a cycling force "C" of 31.1 kN (7000 lb) (31.1 kN) for 100 000 cycles applied by a typical fixture illustrated in Figure 2. Force "C" is to be applied horizontally to a point 90 degrees to the plane of forces "A" and "B"
- (d) Withstand a cycling force "D" of +0.667 to +1.34 times the vertical load rating of the coupler for 1 000 000 cycles applied to the upper coupler plate and kingpin through a plate 914 mm (36 in) wide by 610 mm (24 in) long, shaped like Figure 2.
- (e) Withstand a single application of force "E" of 1.0 GVW up and down through the fixture described in Figure 2, with the kingpin locked to that plate by its 71.44 mm (2.8125 in) diameter lip.
- (f) Kingpin and supporting structure should withstand these conditions without deformation that will prevent compliance with the installation dimensions of SAE J700.

Trailers intended for "Trailer on Flat Car" operation shall withstand force "A" of 3.7 GVW and other requirements specified in Association of American Railroads M931.

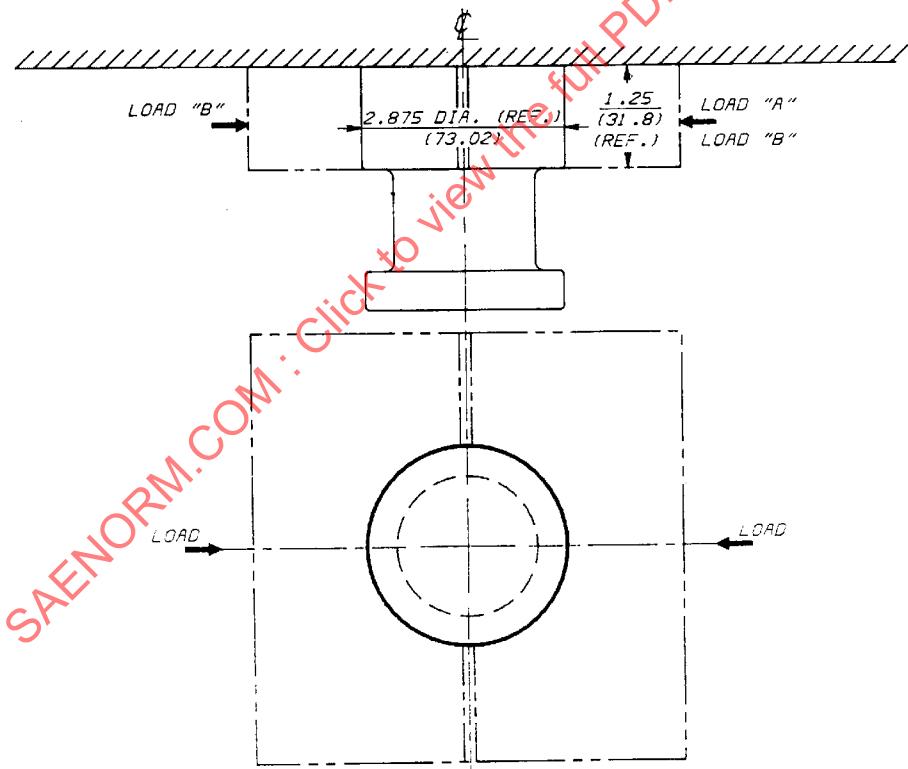


FIGURE 1—FIXTURE FOR APPLYING "A" AND "B" LOAD

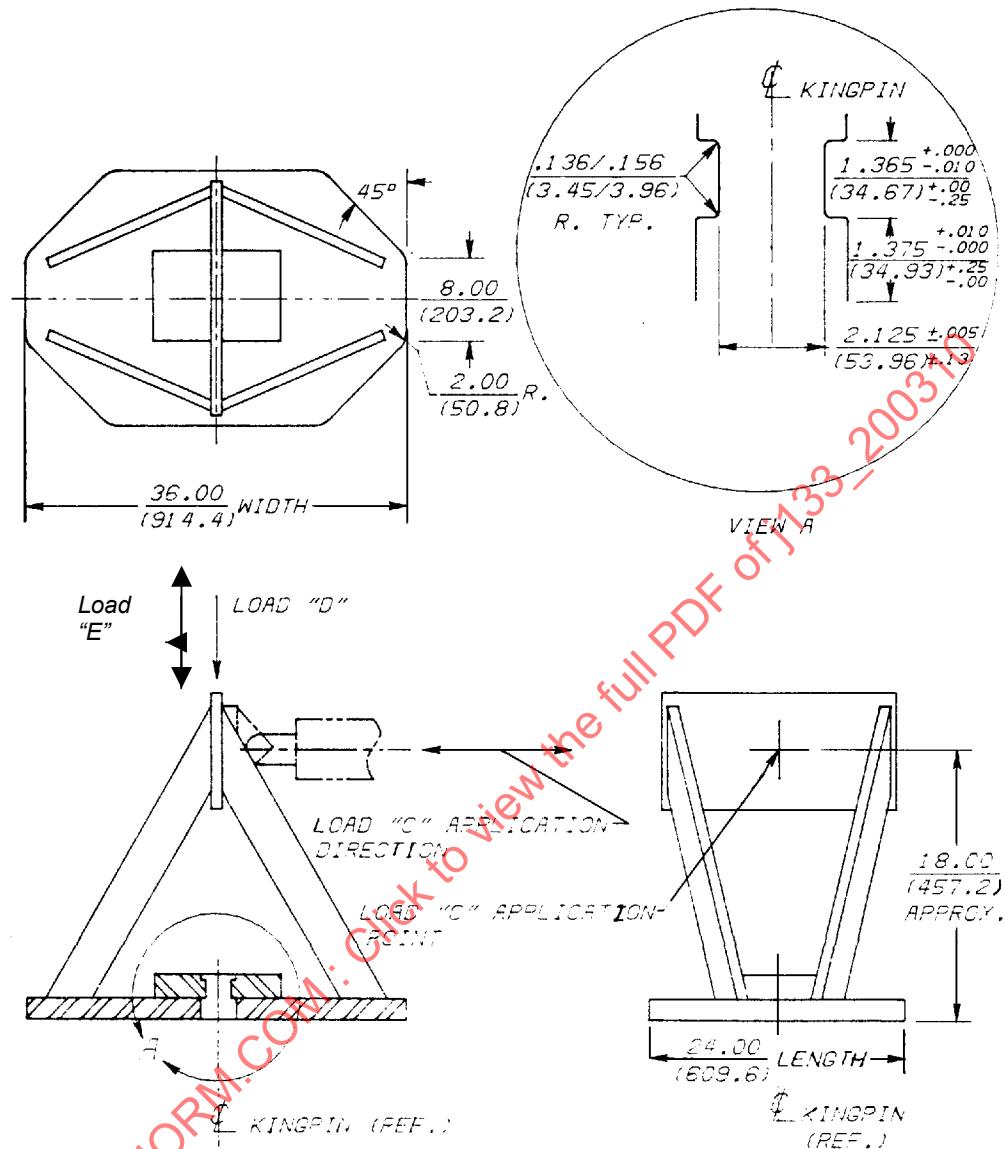


FIGURE 2—Fixture for applying "C", "D", and "E" load

4. Notes

4.1 Marginal Indicia

The change bar (I) located in the left margin is for the convenience of the user in locating areas where technical revisions have been made to the previous issue of the report. An ® symbol to the left of the document title indicates a complete revision of the report.