

Daytime Running Light

RATIONALE

Sections 5.6 and 6.6 have been changed to reflect a change in color requirements from a range of color, "white to yellow" to the specific colors of "white or yellow."

TABLE OF CONTENTS

1.	SCOPE.....	3
2.	REFERENCES.....	3
2.1	Applicable Documents	3
2.2	Related Publications	3
3.	DEFINITIONS	4
3.1	DAYTIME RUNNING LAMP (DRL).....	4
3.2	DAYTIME RUNNING LIGHT FUNCTION (DRLF).....	4
3.3	DAYTIME RUNNING LIGHT FUNCTION TELL-TALE.....	4
4.	LIGHTING IDENTIFICATION CODE, MARKINGS AND NOTICES.....	4
5.	TESTS.....	5
5.1	Vibration Test.....	5
5.2	Moisture Test	5
5.3	Dust Test.....	5
5.4	Corrosion Test.....	5
5.5	Warpage Test on Devices with Plastic Components.....	5
5.6	Color Test.....	5
5.7	Photometry.....	5
6.	REQUIREMENTS	5
6.1	Vibration	5
6.2	Moisture	5
6.3	Dust.....	5
6.4	Corrosion.....	5
6.5	Warpage.....	5
6.6	Color.....	5
6.7	Photometry.....	6
6.8	Materials Requirements	9
6.9	System Requirements.....	9

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

Copyright © 2011 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)
Tel: +1 724-776-4970 (outside USA)
Fax: 724-776-0790
Email: CustomerService@sae.org
SAE WEB ADDRESS: <http://www.sae.org>

**SAE values your input. To provide feedback
on this Technical Report, please visit
http://www.sae.org/technical/standards/J2087_201110**

7.	LIGHT SOURCE REQUIREMENTS	10
7.1	The number of DRLF lamps per vehicle shall be two (2).	10
8.	GUIDELINES	10
8.1	Telltale Guidelines.....	10
8.2	Operating Guidelines	10
8.3	Installation Guidelines.....	10
8.4	Color Guidelines.....	11
9.	NOTES	11
9.1	Marginal Indicia	11
FIGURE 1:	PHOTOMETRIC REQUIREMENTS FOR DEDICATED LAMP PROVIDING DRLF	7
FIGURE 2:	PHOTOMETRIC REQUIREMENTS FOR DEDICATED LAMP PROVIDING DRLF	8
FIGURE 3:	PHOTOMETRIC REQUIREMENTS FOR TURN SIGNAL LAMP OR PARKING LAMP PROVIDING DRLF	9

SAENORM.COM : Click to view the full PDF of j2087-201110

1. SCOPE

This SAE Standard provides test procedures, requirements, and guidelines for a daytime running light (DRL) function.

2. REFERENCES

2.1 Applicable Documents

The following publications form a part of this specification to the extent specified herein. Unless otherwise indicated, the latest issue of SAE publications shall apply.

2.1.1 SAE Publications

Available from SAE International, 400 Commonwealth Drive, Warrendale, PA 15096-0001, Tel: 877-606-7323 (inside USA and Canada) or 724-776-4970 (outside USA), www.sae.org.

SAE J567	Lamp Source Retention System
SAE J575	Test Methods and Equipment for Lighting Devices and Components for Use on Vehicles Less than 2032 mm in Overall Width
SAE J576	Plastic Material or Materials for Use in Optical Parts Such as Lenses and Reflex Reflectors of Motor Vehicle Lighting Devices
SAE J578	Color Specification
SAE J588	Turn Signal Lamps for Use on Motor Vehicles Less than 2032 mm in Overall Width
SAE J759	Lighting Identification Code
SAE J1050	Describing and Measuring the Driver's Field of View
SAE J2560	Forward Lighting Halogen Bulb Performance Requirements for Motor Vehicles

2.2 Related Publications

The following publications are provided for information purposes only and are not a required part of this SAE Technical Report.

2.2.1 SAE Publications

Available from SAE International, 400 Commonwealth Drive, Warrendale, PA 15096-0001, Tel: 877-606-7323 (inside USA and Canada) or 724-776-4970 (outside USA), www.sae.org.

SAE Lighting Committee DRL Test Reports, 1974–1989, nine separate reports

2.2.2 CIE Publications

Available from Commission Internationale de L'eclairage, CIE Central Bureau, Kegelgasse 27, A-1030 Wien Austria, Tel: +43-1-714-31-87-0, www.cie.co.at, see also: national organizations of CIE in the case of the USA: United States National Committee of the CIE, c/o Ronald B. Gibbons, Virginia Tech Transportation Institute, 3500 Transportation Research Place, Blacksburg, VA 24061, U.S.A., e-mail: gibbons@vtti.vt.edu, <http://www.cie-usnc.org>

CIE TC4.13 Report Automobile Daytime Running Lights (DRL), Third Draft, July 1990

2.2.3 UMTRI Publications

Available abstracts, <http://www.umich.edu/~industry/complete.html>

2.2.4 United Nations UNECE Publications

Available from United Nations Economic Commission for Europe, Palais des Nations, CH-1211, Geneva 10, Switzerland, Tel: +41-0-22-917-12-34, <http://www.unece.org/trans/main/wp29/wp29regs.html>.

UNECE Regulation No. 48 Uniform Provisions Concerning the Approval of: Vehicles with Regard to the Installation of Lighting and Light-Signalling Devices

UNECE Regulation No. 87 Uniform Provisions Concerning the Approval of Daytime Running Lamps for Power-Driven Vehicles

2.2.5 CMVSS Publications

Available from Transport Canada, Road Safety and Motor Vehicle Regulation Directorate, P.O. Box 8880, Ottawa Post Terminal, Ottawa, Ontario, K1G.3J2 or at www.tc.gc.ca.

Canadian Motor Vehicle Safety Standard (CMVSS) 108 Lighting System and Retroreflective Devices

2.2.6 FMVSS Publications

Available from the Superintendent of Documents, U.S. Government Printing Office, 732 North Capitol Street, NW, Washington, DC 20401, <http://www.gpoaccess.gov/cfr/index/html>

CFR Title 49 Part 571.108; Lamps, Reflective Devices and Associated Equipment (FMVSS 108)

3. DEFINITIONS

3.1 DAYTIME RUNNING LAMP (DRL)

A lamp providing the daytime running light function.

3.2 DAYTIME RUNNING LIGHT FUNCTION (DRLF)

Steady burning light signal used to improve the conspicuity of a vehicle from the front and front-sides when the regular headlamps are not required for driving.

3.3 DAYTIME RUNNING LIGHT FUNCTION TELL-TALE

An indicator that provides a visual signal to advise the driver that only the lamps providing DRLF are operating.

4. LIGHTING IDENTIFICATION CODE, MARKINGS AND NOTICES

Lamps providing DRLF meeting the performance requirements of Section 6 of this document may be identified by the code DRL in accordance with SAE J759.

5. TESTS

SAE J575 is a part of this document. The following tests, from that document, are applicable with the modifications as indicated.

5.1 Vibration Test

5.2 Moisture Test

5.3 Dust Test

5.4 Corrosion Test

5.5 Warpage Test on Devices with Plastic Components

The bulb operation for this test shall be steady burning.

5.6 Color Test

White or Yellow as specified in SAE J578

5.7 Photometry

In addition to the test procedures stated in SAE J575, the following applies: Photometric measurements shall be made with the photometer located at least 3 m from the point where the optical axis intersects the outer surface of the DRL lens.

6. REQUIREMENTS

Performance Requirements

A DRL, when tested in accordance with the test procedures specified in Section 5, shall meet the following requirements:

6.1 Vibration

SAE J575.

6.2 Moisture

SAE J575.

6.3 Dust

SAE J575.

6.4 Corrosion

SAE J575.

6.5 Warpage

SAE J575.

6.6 Color

SAE J578. The color of the light from a DRL shall be white or yellow as specified in SAE J578.

6.7 Photometry

Shall meet requirements as tested per SAE J575 to the following lamp function types:

6.7.1 Dedicated DRL

The device under test shall be designed to conform to the light intensity distribution (candela) values as shown in Figure 1 or Figure 2 when tested accordance with 5.7.

6.7.2 Turn Signal or Parking Lamp Providing the DRLF

The device will conform when operated at 2.5X intensity and conforming to one of the front turn signal distribution figures, or when the device under test shall be designed to conform to the light intensity distribution (candela) values as shown in Figure 3 when tested accordance with 5.7.

6.7.3 Headlamp High or Low Beam Providing the DRLF


A headlamp providing daytime running light function shall have:

- a. in case of low beam headlamp, not more than 100 percent of its designed photometric intensity when tested in accordance with SAE J575 or;
- b. When using the low beam headlamps that are designed to meet SAE J1383 requirements to achieve DRLF, the light output from the lamp shall be reduced to the range of greater than 40% but less than 100% of the its designed photometric intensity values when tested in accordance with SAE J575. Such light output reduction requirement can be conformed at test point 1.5D-2R of the low beam headlamp.
- c. When using the high beam headlamps that are designed to meet SAE J1383 requirements to achieve DRLF, luminous intensity value shall be greater than 2000 cd but less than 7000 cd at test point of H-V when tested in accordance with SAE J575.

6.7.4 DRL Function Location With Respect to Other Lamps


If a DRL is located such that the lighted edge is within 100 mm of the optical center of the front turn signal lamp, or within 40mm of the lighted edge of the front turn signal lamp, then;

- a. the front turn signal lamp shall meet 2.5 times photometry requirement, or
- b. the DRL adjacent to the front turn signal lamp is extinguished or its intensity shall be reduced to a maximum of 250 cd or less at the H-V axis of the lamp during the turn signal operation.

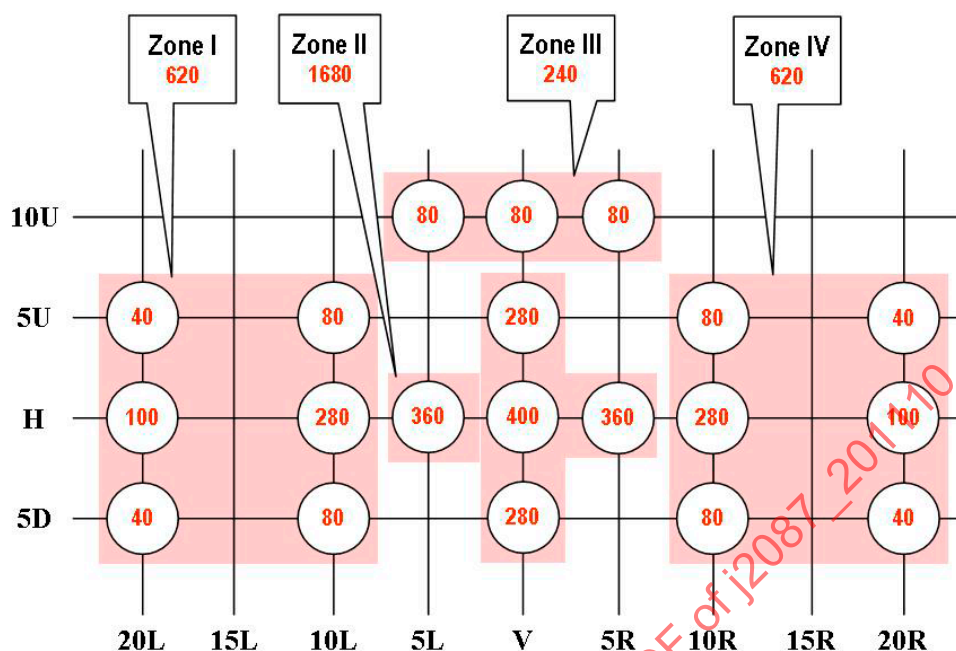

1. The maximum luminous intensity shall be 2500 cd within the photometric pattern.
2. The Measured value at each test point shall not be less than 60% of the required minimum value shown for that individual test point location.
3. The sum of the luminous intensity measurements at each test point within a zone shall not be less than the zone total shown. The luminous intensity measurements at each discrete test point shown within the corresponding zone are the values used to calculate the specified zone total.
4. The listed maximum cd shall not be exceeded over any area larger than that generated by a 0.5 degree radius within the solid angle defined by the test points.
5. Multipliers are applicable per 6.2.4a
6. The off-mode applies per 6.2.4b

FIGURE 1 - PHOTOMETRIC REQUIREMENTS FOR DEDICATED LAMP PROVIDING DRLF
(with projected luminous lens area of 200 cm² or less)
Minimum Luminous Intensity (cd)

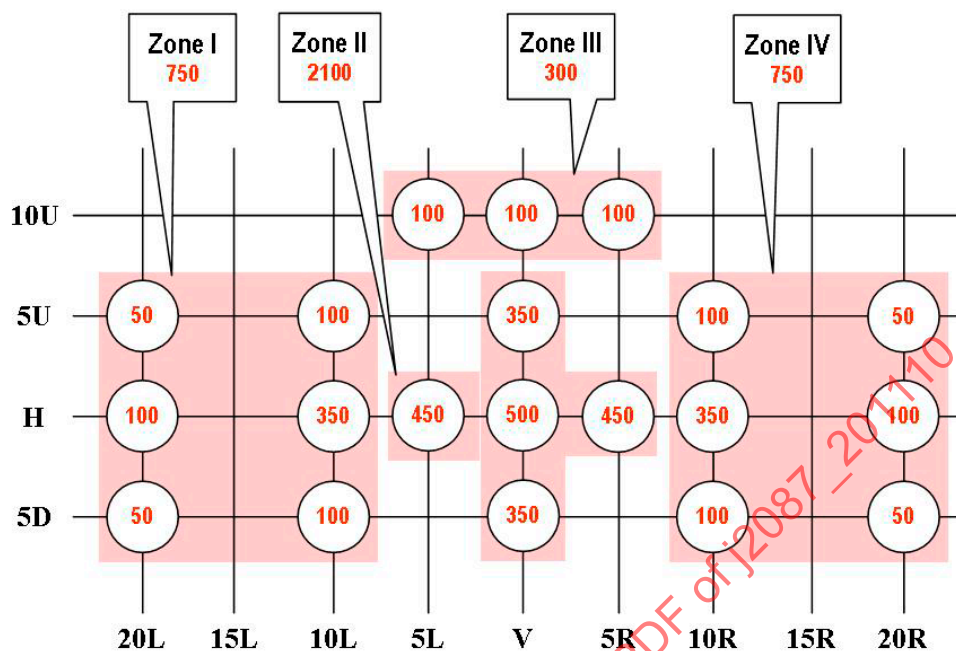

1. The maximum luminous intensity shall be 2500 cd within the photometric pattern.
2. The Measured value at each test point shall not be less than 60% of the required minimum value shown for that individual test point location.
3. The sum of the luminous intensity measurements at each test point within a zone shall not be less than the zone total shown. The luminous intensity measurements at each discrete test point shown within the corresponding zone are the values used to calculate the specified zone total.
4. The listed maximum cd shall not be exceeded over any area larger than that generated by a 0.5 degree radius within the solid angle defined by the test points.
5. Multipliers are applicable per 6.2.4a
6. The off-mode applies per 6.2.4b

FIGURE 2 - PHOTOMETRIC REQUIREMENTS FOR DEDICATED LAMP PROVIDING DRLF
(with projected luminous lens area greater than 200 cm²)
Minimum Luminous Intensity (cd)