


AS3220


SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

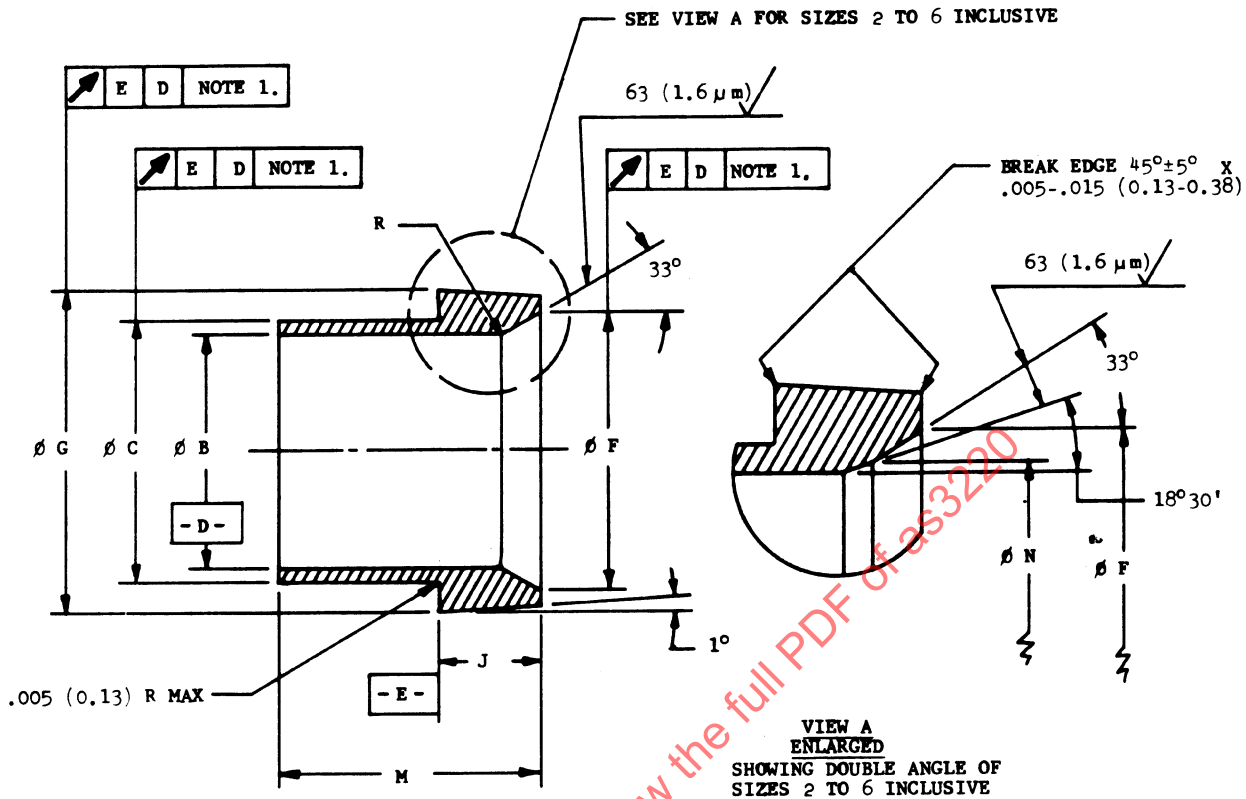

SAE 100
Leading Our World In Motion

THIRD ANGLE PROJECTION



PREPARED BY SAE COMMITTEE E-25, GENERAL STANDARDS FOR AEROSPACE PROPULSION SYSTEMS

SAE Aerospace
An SAE International Group

AEROSPACE STANDARD

SLEEVE, FLARED, TUBE FITTING - ALUMINUM

AS3220
SHEET 1 OF 3

TABLE 1

PART NO.	TUBING OD	B		C		F		G		J		M		N		R		APPROX MASS	
		INCH	mm	INCH	mm	INCH	mm	INCH	mm	INCH	mm	INCH	mm	INCH	mm	INCH	mm	LB/100	kg/100
AS3220-02	.125	.133 .130	3.378 3.302	.172 .169	4.369 4.293	.210 .200	5.334 5.080	.270 .262	6.858 6.762	.141 .109	3.581 2.769	.360 .328	9.144 8.332	.183 .173	4.648 4.394	-	-	.07	0.032
AS3220-03	.188	.196 .193	4.978 4.902	.244 .231	5.944 5.868	.272 .262	6.909 6.655	.332 .319	8.433 8.157	.157 .125	3.987 3.175	.422 .390	10.718 9.906	.245 .235	6.223 5.969	-	-	.11	0.050
AS3220-04	.250	.258 .255	6.553 6.477	.297 .294	7.544 7.468	.321 .311	8.153 7.999	.386 .383	9.804 9.788	.125 .125	3.175 3.175	.390 .390	9.906 9.906	.293 .283	7.442 7.188	-	-	.13	0.059
AS3220-05	.313	.321 .318	8.153 8.077	.366 .363	9.296 9.220	.380 .370	9.652 9.398	.448 .445	11.379 11.303	.172 .140	4.368 3.556	.454 .422	11.531 10.719	.353 .343	8.966 8.712	-	-	.18	0.082
AS3220-06	.375	.383 .380	9.728 9.652	.432 .429	10.973 10.897	.446 .436	11.328 11.074	.505 .502	12.827 12.751	.188 .156	4.775 3.963	.516 .484	13.106 12.294	.419 .409	10.643 10.389	-	-	.25	0.113
AS3220-08	.500	.508 .505	12.903 12.827	.562 .559	14.275 14.199	.584 .584	15.088 14.834	.685 .682	17.399 17.323	.235 .203	5.969 5.157	.578 .546	14.681 13.869	-	-	.078 .046	1.981 1.169	.51	0.231
AS3220-10	.625	.634 .631	15.951 15.875	.690 .687	17.526 17.450	.710 .700	18.034 17.780	.800 .797	20.320 20.244	.250 .218	6.350 5.538	.672 .640	17.068 16.256	-	-	.084 .082	2.387 1.575	1.12	0.508
AS3220-12	.750	.759 .756	19.278 19.202	.826 .823	20.980 20.904	.885 .875	22.479 22.285	.975 .972	24.765 24.689	.282 .250	7.162 6.350	.704 .672	17.881 17.069	-	-	.110 .078	2.794 1.982	1.64	0.744
AS3220-16	1.000	1.009 1.006	25.628 25.552	1.081 1.078	27.457 27.381	1.135 1.125	28.829 28.575	1.295 1.282	31.115 31.039	.297 .265	7.543 6.731	.797 .765	20.243 19.431	-	-	-	-	2.77	1.256
AS3220-20	1.250	1.263 1.260	32.080 32.004	1.339 1.336	34.011 33.935	1.417 1.407	35.992 35.738	1.537 1.534	39.040 38.964	.328 .296	8.331 7.519	.822 .790	23.418 22.606	-	-	-	-	6.53	2.962
AS3220-24	1.500	1.513 1.510	38.430 38.354	1.609 1.606	40.969 40.793	1.635 1.625	41.529 41.275	1.787 1.784	45.390 45.314	.360 .328	9.144 8.332	1.141 1.109	26.124 25.312	-	-	.125 .093	3.175 2.363	7.00	3.175
AS3220-28	1.750	1.765 1.762	44.831 44.755	1.889 1.879	47.803 47.727	1.950 1.940	49.530 49.276	2.162 2.159	54.915 54.839	.391 .359	9.931 9.119	1.204 1.172	30.581 29.769	-	-	-	-	9.05	4.105
AS3220-32	2.000	2.017 2.014	51.233 51.157	2.152 2.156	54.839 54.763	2.200 2.190	55.880 55.686	2.411 2.408	61.239 61.163	.422 .390	10.718 9.906	1.298 1.266	33.731 32.919	-	-	-	-	12.51	5.674
AS3220-40	2.500	2.519 2.516	63.982 63.906	2.659 2.656	67.539 67.463	2.700 2.690	68.580 68.326	2.914 2.911	74.015 73.939	.485 .453	12.916 11.907	1.328 1.296	33.731 32.919	-	-	-	-	16.13	7.316
AS3220-48	3.000	3.012 3.018	76.682 76.606	3.172 3.169	80.569 80.493	3.200 3.190	81.280 81.026	3.414 3.411	86.715 86.639	.547 .515	13.981 13.081	1.391 1.359	35.331 34.519	-	-	-	-	-	-